

STRUCTURE Silicon Monolithic Integrated Circuit

NAME OF PRODUCT DC-AC Inverter Control IC

TYPE **B D 9 8 8 7 F S**

FUNCTION • 36V High voltage process
 • 1ch control with Full-Bridge
 • Lamp current and voltage sense feed back control
 • Sequencing easily achieved with Soft Start Control
 • Short circuit protection with Timer Latch
 • Under Voltage Lock Out
 • Mode-selectable the operating or stand-by mode by stand-by pin
 • Synchronous operating the other BD9887FS IC's
 • BURST mode controlled by PWM and DC input
 • Output liner Control by external DC voltage

○Absolute Maximum Ratings (Ta = 25°C)

| Parameter | Symbol | Limits | Unit |
|------------------------------|--------|----------|------|
| Supply Voltage | Vcc | 36 | V |
| BST pin | BST | 40 | V |
| SW pin | SW | 36 | V |
| BST-SW voltage difference | BST-SW | 7 | V |
| Operating Temperature Range | Topr | -40~+85 | °C |
| Storage Temperature Range | Tstg | -55~+125 | °C |
| Maximum Junction Temperature | Tjmax | +150 | °C |
| Power Dissipation | Pd | 760* | mW |

*Pd derate at 6.08mW/°C for temperature above Ta = 25°C (When mounted on a PCB 70.0mm×70.0mm×1.6mm)

○Operating condition

| Parameter | Symbol | Limits | Unit |
|---------------------------|--------|-----------|------|
| Supply voltage | VCC | 6.5~30.0 | V |
| BST voltage | BST | 4.0~36.0 | V |
| BST-SW voltage difference | BST-SW | 4.0~6.0 | V |
| CT oscillation frequency | fCT | 60~180 | kHz |
| BCT oscillation frequency | fBCT | 0.05~1.00 | kHz |

Status of this document

The Japanese version of this document is the official specification.

Please use the translation version of this document as a reference to expedite understanding of the official version.


If there are any uncertainty in translation version of this document, official version takes priority.

○Electric Characteristics (Ta=25°C, VCC=24V)

| Parameter | Symbol | Limits | | | Unit | Conditions |
|--------------------------------------|-----------------------------|---------------------|----------------------|----------------------|------|------------------------------------|
| | | MIN. | TYP. | MAX. | | |
| ((WHOLE DEVICE)) | | | | | | |
| Operating current | Icc1 | — | 10.0 | 18.0 | mA | VCT=0.5V |
| Stand-by current | Icc2 | — | 13.0 | 30.0 | μA | |
| ((STAND BY CONTROL)) | | | | | | |
| Stand-by voltage H | VstH | 1.4 | — | VCC | V | System O N |
| Stand-by voltage L | VstL | -0.3 | — | 0.8 | V | System O F F |
| ((UVLO BLOCK)) | | | | | | |
| Operating voltage (VCC) | VuvloH | 5.7 | 6.0 | 6.3 | V | |
| Shut down voltage (VCC) | VuvloL | 5.4 | 5.7 | 6.0 | V | |
| Hysteresis width (VCC) | ΔVCC_Vuvlo | 0.22 | 0.29 | 0.36 | V | |
| Operating voltage (UVLO) | Vuvlo1 | 2.10 | 2.16 | 2.22 | V | |
| Shut down voltage (UVLO) | Vuvlo2 | 2.179 | 2.25 | 2.321 | V | |
| Hysteresis width (UVLO) | ΔVuvlo | 0.074 | 0.098 | 0.122 | V | |
| ((REG BLOCK)) | | | | | | |
| REG output voltage | VREG | 5.68 | 5.80 | 5.92 | V | VCC>7.0V |
| REG source current | I _{REG} | 20.0 | — | — | mA | |
| VREF input voltage range | VREFIN | 0.60 | — | 1.60 | V | No effect at VREF>1.25V |
| ((OSC BLOCK)) | | | | | | |
| Active edge setting current | I _{act} | 1.35/RT | 1.5/RT | 1.65/RT | V | |
| Negative edge setting current | I _{neg} | I _{act} ×8 | I _{act} ×10 | I _{act} ×12 | V | |
| OSC Max voltage | V _{oscH} | 1.8 | 2.0 | 2.2 | V | fCT=120kHz |
| OSC Min voltage ① | V _{oscL1} | 0.32 | 0.63 | 0.94 | V | fCT=50kHz |
| OSC Min voltage ② | V _{oscL2} | 0.22 | 0.44 | 0.66 | V | fCT=120kHz |
| Soft start current | I _{SS} | 0.7 | 1.4 | 2.1 | μA | |
| SRT ON resistance | R _{SRT} | — | 150 | 300 | Ω | |
| ((BOSC BLOCK)) | | | | | | |
| BOSC Max voltage | V _{BCTH} | 1.94 | 2.00 | 2.06 | V | fBCT=0.3kHz |
| BOSC Min voltage | V _{BCTL} | 0.40 | 0.50 | 0.60 | V | fBCT=0.3kHz |
| BOSC constant current | I _{BCT} | 1.35/BRT | 1.5/BRT | 1.65/BRT | A | V _{BCT} =0.2V |
| BOSC frequency | f _{BCT} | 291 | 300 | 309 | Hz | BRT=33kΩ BCT=0.048μF |
| ((FEED BACK BLOCK)) | | | | | | |
| IS threshold voltage 1 | V _{IS①} | 1.225 | 1.250 | 1.275 | V | |
| IS threshold voltage 2 | V _{IS②} | — | VREFIN | V _{IS①} | V | VREF applying voltage |
| VS threshold voltage | V _{vs} | 1.225 | 1.250 | 1.275 | V | |
| IS source current 1 | I _{IS1} | — | — | 0.9 | μA | DUTY=2.0V |
| IS source current 2 | I _{IS2} | 35.6 | 57.0 | 78.4 | μA | DUTY=0V IS=0.5V |
| VS source current | I _{VS} | — | — | 0.9 | μA | |
| FB over voltage detect voltage | V _{ovf} | 2.2 | 2.5 | 2.8 | V | |
| IS COMP detect voltage ① | V _{ISCOMP①} | 0.893 | 0.92 | 0.947 | V | VREFIN≥1.25V |
| IS COMP detect voltage ② | V _{ISCOMP②} | — | VREFIN×0.74 | — | V | VREFIN<1.25V |
| ((DUTY BLOCK)) | | | | | | |
| High voltage | V _{DUTY-OUTH} | 2.8 | 3.1 | 3.4 | V | |
| Low voltage | V _{DUTY-OUTL} | — | — | 0.5 | V | |
| DUTY-OUT sink resistance | R _{DUTY-OUTSink} | — | 150 | 300 | Ω | |
| DUTY-OUT source resistance | R _{DUTY-OUTSource} | — | 200 | 400 | Ω | |
| ((OUTPUT BLOCK)) | | | | | | |
| LN output sink resistance | R _{sinkLN} | — | 1.5 | 3.0 | Ω | |
| LN output source resistance | R _{sourceLN} | — | 5.0 | 10.0 | Ω | |
| HN output sink resistance | R _{sinkHN} | — | 2.5 | 5.0 | Ω | V _{BST-VSN} =5.0V |
| HN output source resistance | R _{sourceHN} | — | 5.0 | 10.0 | Ω | V _{BST-VSN} =5.0V |
| MAX DUTY | MAX DUTY | 44 | 46.5 | 49 | % | F _{OUT} =60kHz |
| OFF period ① | T _{OFF①} | — | 120 | 200 | ns | SW>4.0V |
| OFF period ② | T _{OFF②} | 150 | 230 | 310 | ns | SW<2.0V |
| Drive output frequency | f _{CT} | 58.5 | 60.0 | 61.5 | kHz | RT=15kΩ, CT=430pF |
| ((TIMER LATCH BLOCK)) | | | | | | |
| Timer Latch setting voltage | V _{CP} | 1.94 | 2.0 | 2.06 | V | |
| Timer Latch setting current ① | I _{CP1} | 0.53 | 0.66 | 0.79 | μA | except for under voltage detecting |
| Timer Latch setting current ② | I _{CP2} | 4.98 | 6.22 | 7.46 | μA | only under voltage detecting |
| ((COMP CLOCK)) | | | | | | |
| COMP1 over voltage detect voltage | V _{COMP1} | 2.460 | 2.485 | 2.510 | V | V _{SS} >2.2V |
| COMP2 over voltage detect voltage | V _{COMP2_H} | 2.460 | 2.485 | 2.510 | V | V _{SS} >2.2V |
| COMP2 under voltage detect voltage ① | V _{COMP_L_1} | 1.225 | 1.25 | 1.275 | V | V _{SS} >2.2V |
| COMP2 under voltage detect voltage ② | V _{COMP_L_2} | 0.606 | 0.625 | 0.644 | V | V _{SS} <2.2V |
| ((Synchronous Block)) | | | | | | |
| High voltage | V _{CT_SYNC} | 2.8 | 3.1 | 3.4 | V | |
| Low voltage | V _{CT_SYNC_L} | — | — | 0.5 | V | |
| CT_SYNC sink resistance | R _{CT_SYNC_SINK} | — | 150 | 300 | Ω | |
| CT_SYNC source resistance | R _{CT_SYNC_SOURCE} | — | 370 | 740 | Ω | |
| Master IC setting voltage | V _{IL_CT} | 5.5 | — | 7.0 | V | CT_SYNC_IN pulled up to REG |
| High voltage input range | V _{CT_SYNC_IN_H} | 2.0 | — | 3.3 | V | |
| Low voltage input range | V _{CT_SYNC_IN_L} | -0.3 | — | 0.6 | V | |

(This product is not designed to be radiation-resistant.)


○Package Dimensions

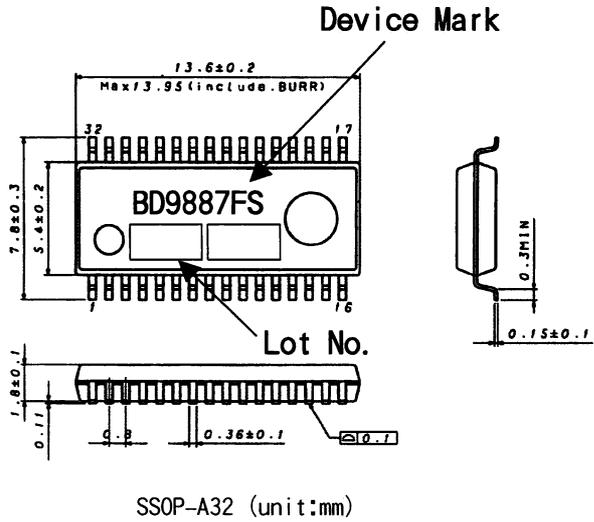

○Pin Description

| PIN No. | PIN NAME | FUNCTION |
|---------|-------------|--|
| 1 | PGND | Ground for FET drivers |
| 2 | LN2 | NMOS FET driver |
| 3 | HN2 | NMOS FET driver |
| 4 | SW2 | Lower rail voltage for HN2 output |
| 5 | BST2 | Boot-Strap input for HN2 output |
| 6 | CT_SYNC_IN | CT synchronous signal input pin |
| 7 | CT_SYNC_OUT | CT synchronous signal output pin |
| 8 | SRT | External resistor from SRT to RT for adjusting the triangle oscillator |
| 9 | RT | External resistor from SRT to RT for adjusting the triangle oscillator |
| 10 | CT | External capacitor from CT to GND for adjusting the triangle oscillator |
| 11 | GND | GROUND |
| 12 | BCT | External capacitor from BCT to GND for adjusting the BURST triangle oscillator |
| 13 | BRT | External resistor from BRT to GND for adjusting the BURST triangle oscillator |
| 14 | DUTY | Control PWM mode and BURST mode |
| 15 | DUTY_OUT | BURST signal output pin |
| 16 | STB | Stand-by switch |
| 17 | CP | External capacitor from CP to GND for Timer Latch |
| 18 | FAIL | COMP2 under voltage protect clock output |
| 19 | VREF | Reference voltage input pin for Error amplifier ① |
| 20 | VS | Error amplifier input ② |
| 21 | IS | Error amplifier input ① |
| 22 | FB | Error amplifier output |
| 23 | SS | External capacitor from SS to GND for Soft Start Control |
| 24 | COMP2 | Under, over voltage detect pin |
| 25 | COMP1 | Over voltage detect pin |
| 26 | VCC | Supply voltage input |
| 27 | UVLO | External Under Voltage Lock Out |
| 28 | REG | Internal regulator output |
| 29 | BST1 | Boot-Strap input for HN1 output |
| 30 | SW1 | Lower rail voltage for HN1 output |
| 31 | HN1 | NMOS FET driver |
| 32 | LN1 | NMOS FET driver |

○Block Diagram

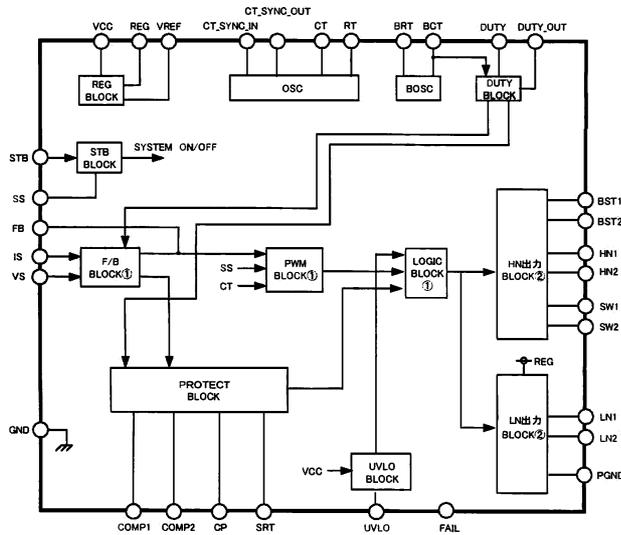

○NOTE FOR USE

1. When designing the external circuit, including adequate margins for variation between external devices and IC. Use adequate margins for steady state and transient characteristics.
2. The circuit functionality is guaranteed within of ambient temperature operation range as long as it is within recommended operating range. The standard electrical characteristic values cannot be guaranteed at other voltages in the operating ranges, however the variation will be small.
3. Mounting failures, such as misdirection or miscounts, may harm the device.
4. A strong electromagnetic field may cause the IC to malfunction.
5. The GND pin should be the location within $\pm 0.3V$ compared with the PGND pin.
6. BD9887FS incorporate a built-in thermal shutdown circuit (TSD circuit). The thermal shutdown circuit (TSD circuit) is designed only to shut the IC off to prevent runaway thermal operation. It is not designed to protect the IC or guarantee its operation of the thermal shutdown circuit is assumed.
7. Absolute maximum ratings are those values that, if exceeded, may cause the life of a device to become significantly shortened. Moreover, the exact failure mode caused by short or open is not defined. Physical countermeasures, such as a fuse, need to be considered when using a device beyond its maximum ratings.
8. About the external FET, the parasitic Capacitor may cause the gate voltage to change, when the drain voltage is switching. Make sure to leave adequate margin for this IC variation.
9. On operating Slow Start Control (SS is less than 2.2V), It does not operate Timer Latch.
10. By STB voltage, BD9887FS are changed to 2 states. Therefore, do not input STB pin voltage between one state and the other state (0.8~1.4V).

11. The pin connected a connector need to connect to the resistor for electrical surge destruction. This IC is a monolithic IC which (as shown is Fig-1) has P⁺ substrate and between the various pins. A P-N junction is formed from this P layer of each pin. For example, the relation between each potential is as follows,

○(When GND > PinB and GND > PinA, the P-N junction operates as a parasitic diode.)

○(When PinB > GND > PinA, the P-N junction operates as a parasitic transistor.)

Parasitic diodes can occur inevitably in the structure of the IC. The operation of parasitic diodes can result in mutual interference among circuits as well as operation faults and physical damage. Accordingly you must not use methods by which parasitic diodes operate, such as applying a voltage that is lower than the GND (P substrate) voltage to an input pin.

12. This IC is a monolithic IC which (as shown is Fig-1)has P⁺ substrate and between the various pins. A P-N junction is formed from this P layer of each pin. For example, the relation between each potential is as follows,

○(When GND > PinB and GND > PinA, the P-N junction operates as a parasitic diode.)

○(When PinB > GND > PinA, the P-N junction operates as a parasitic transistor.)

Parasitic diodes can occur inevitably in the structure of the IC. The operation of parasitic diodes can result in mutual interference among circuits as well as operation faults and physical damage. Accordingly you must not use methods by which parasitic diodes operate, such as applying a voltage that is lower than the GND (P substrate) voltage to an input pin.

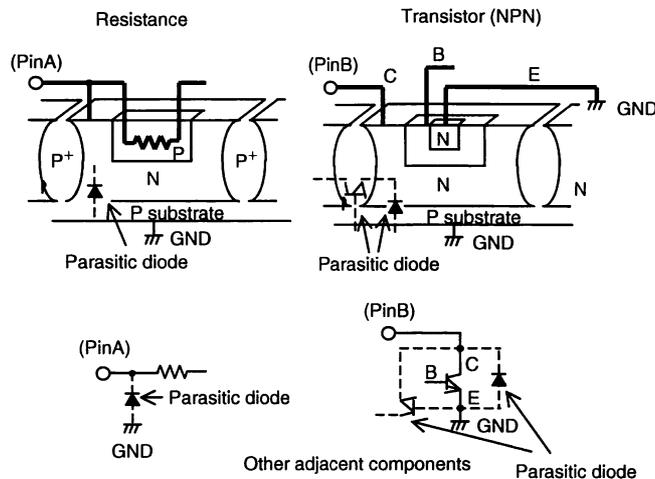


Fig-1 Simplified structure of a Bipolar IC

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available,
please contact your nearest sales office.

Please contact our sales offices for details ;

| | | |
|-------------------------|---------------------------|----------------------------|
| U.S.A / San Diego | TEL : +1(858)625-3630 | FAX : +1(858)625-3670 |
| Atlanta | TEL : +1(770)754-5972 | FAX : +1(770)754-0691 |
| Dallas | TEL : +1(972)312-8818 | FAX : +1(972)312-0330 |
| Germany / Dusseldorf | TEL : +49(2154)9210 | FAX : +49(2154)921400 |
| United Kingdom / London | TEL : +44(1)908-282-666 | FAX : +44(1)908-282-528 |
| France / Paris | TEL : +33(0)1 56 97 30 60 | FAX : +33(0) 1 56 97 30 80 |
| China / Hong Kong | TEL : +852(2)740-6262 | FAX : +852(2)375-8971 |
| Shanghai | TEL : +86(21)6279-2727 | FAX : +86(21)6247-2066 |
| Dilian | TEL : +86(411)8230-8549 | FAX : +86(411)8230-8537 |
| Beijing | TEL : +86(10)8525-2483 | FAX : +86(10)8525-2489 |
| Taiwan / Taipei | TEL : +866(2)2500-6956 | FAX : +866(2)2503-2869 |
| Korea / Seoul | TEL : +82(2)8182-700 | FAX : +82(2)8182-715 |
| Singapore | TEL : +65-6332-2322 | FAX : +65-6332-5662 |
| Malaysia / Kuala Lumpur | TEL : +60(3)7958-8355 | FAX : +60(3)7958-8377 |
| Philippines / Manila | TEL : +63(2)807-6872 | FAX : +63(2)809-1422 |
| Thailand / Bangkok | TEL : +66(2)254-4890 | FAX : +66(2)256-6334 |

Japan /
(Internal Sales)

| | | | |
|----------|--|-----------------------|-----------------------|
| Tokyo | 2-1-1, Yaesu, Chuo-ku, Tokyo 104-0082 | TEL : +81(3)5203-0321 | FAX : +81(3)5203-0300 |
| Yokohama | 2-4-8, Shin Yokohama, Kohoku-ku, Yokohama, Kanagawa 222-8575 | TEL : +81(45)476-2131 | FAX : +81(45)476-2128 |
| Nagoya | Dainagayo Building 9F 3-28-12, Meieki, Nakamura-ku, Nagoya, Aichi 450-0002 | TEL : +81(52)581-8521 | FAX : +81(52)561-2173 |
| Kyoto | 579-32 Higashi Shiokouji-cho, Karasuma Nishi-iru, Shiokoujidori, Shimogyo-ku, Kyoto 600-8216 | TEL : +81(75)311-2121 | FAX : +81(75)314-6559 |

(Contact address for overseas customers in Japan)

| | | |
|----------|-----------------------|------------------------|
| Yokohama | TEL : +81(45)476-9270 | FAX : +81(045)476-9271 |
|----------|-----------------------|------------------------|