
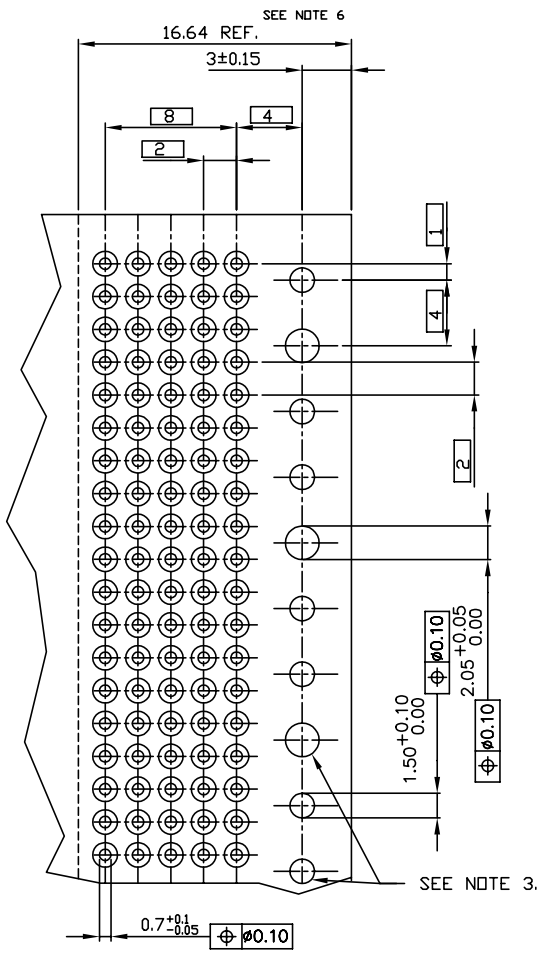
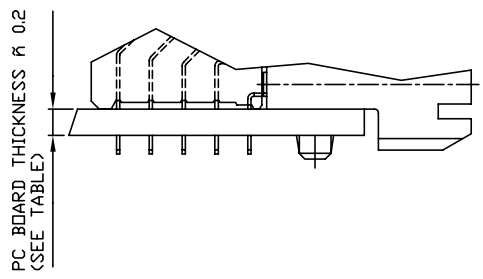
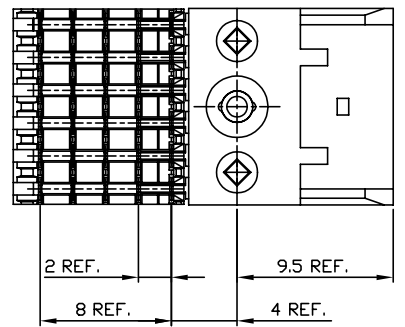

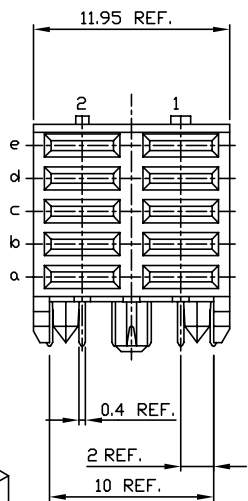


PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY	TELCORDIA CO
-2YY	CUSTOMER SPECIAL
-3YY	CUSTOMER SPECIAL
-4YY	CUSTOMER SPECIAL
-5YY	TELCORDIA CO
-1YYLF	TELCORDIA CO
-2YYLF	CUSTOMER SPECIAL
-3YYLF	CUSTOMER SPECIAL
-9YYLF	TELCORDIA CO

OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE

PC BOARD VERSIONS		
PRODUCT NR:	PCB THICKNESS	DIM "A"
85876-X02LF	1.6	2.90
85876-X12LF	2.4	3.53

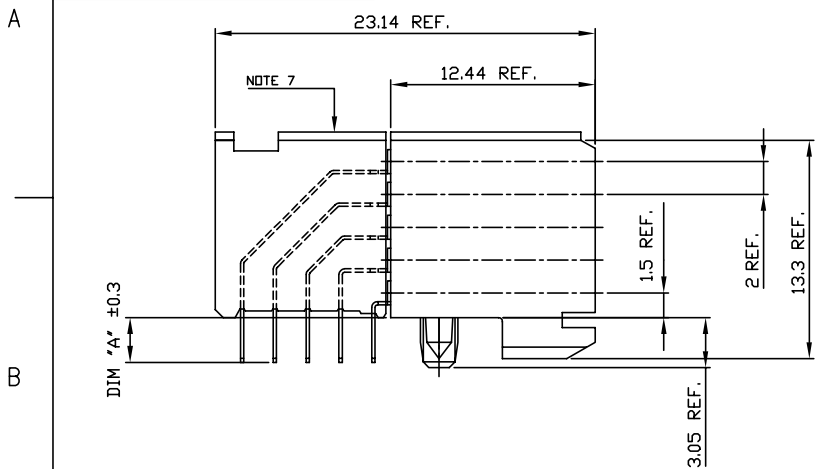

RECOMMENDED HOLE PATTERN, COMPONENT SIDE.

- NOTES:
- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
 - TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - INDICATED HOLES ARE UNPLATED.
 - PRODUCT MARKING: PART NUMBER & BATCH ID.
 - SET BACK FOR PRESS BLOCK
 - TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD.
 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
 - THE PRODUCT SPECIFICATION GS-12-453.

www.fciconnect.com		surface ISO 1302	tolerance ISO 406 ISO 1101	projection	MM
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	R.VISSCHERS	1994-10-05	ANGULAR	size A2	Scale 5:1
Eng	E.FEIJEN	1994-10-05	LINEAR	ECN	N11-0131
Chr	E.FEIJEN	1994-10-05	0° ±2.0°	Spec ref	RELEASE
Appr	E.FEIJEN	1994-10-05	Product family	METRAL	
FCI		title 5 ROW POWER S.T.B RECEPTACLE 12mm MOD. P.P.		dwg no 85876	Rev. G
		catalog no	CUSTOMER	sheet 1 of 1	

rev	ecn no	dr	date
A	H10627	RVI	1994-10-05
B	V00578	LLA	2000-03-16
C	V00850	GNY	2000-05-12
D	DG04-0107	CLU	2004-12-28
E	DG07-0458	CEN	2007-11-15
F	DG08-0171	TER	2008-08-15
G	N11-0131	A.ZH	2011-05-09

REV F - 2008-04-17