

# Micro

## High Performance Multi-Protocol Embedded UHF RFID Module



The 2-port Micro delivers the size, operating efficiency, RF power, and flexibility needed to embed UHF RFID in best-in-class fixed position, portable, and hand held applications where small form factor is important. The Micro reads up to 750 tags/second and features low power consumption needed for battery operated applications. Micro's wide RF output range (-5 dBm to +30 dBm) is a key requirement for RFID enabled printers, tag commissioning stations, and point of sales readers. Edge connections allow the Micro to be soldered directly to a motherboard as a standard component. The on-board connectors allow the module to be mated to a motherboard.

| Ordering Information        |   |
|-----------------------------|---|
| Module                      | M6E-M   |
| Development Kit             | M6E-M-DEVKIT  |
| Physical                    |   |
| Dimensions                  | 46 mm L x 26 mm W x 4.0 mm H<br>(1.8 in L x 1.0 in W x 0.16 in H)   |
| Tag / Transponder Protocols |   |
| RFID Protocol Support       | EPCglobal Gen 2 (ISO 18000-6C) with DRM<br>IP-X and ISO 18000-6B optional   |
| RF Interface                |   |
| Antenna Connector           | Two 50 $\Omega$ connections (board-edge or U.FL) supporting two monostatic antennas   |
| RF Power Output             | Separate read and write levels, command-adjustable from -5 dBm to 30 dBm* in 0.5 dB steps, accurate to +/- 1 dBm  |
| Regulatory                  | Pre-configured for the following regions: <ul style="list-style-type: none"> <li>• FCC (NA, SA) 902-928 MHz</li> <li>• ETSI (EU, India) 865.6-867.6 MHz</li> <li>• TRAI (India) 865-867 MHz</li> <li>• KCC (Korea) 917-920.8 MHz</li> <li>• ACMA (Australia) 920-926 MHz</li> <li>• SRRC-MII (P.R.China) 920-925 MHz</li> <li>• MIC (Japan) 916.8-923.4 MHz</li> <li>• 'Open' (Customizable channel plan; 865-868 MHz and 902-928 MHz)</li> </ul> |
| Data/Control Interface      |   |
| Physical                    | 28 board-edge connections or Molex low profile connector (53748-0208) providing DC power, communication, control and GPIO signals   |
| Control/Data Interfaces     | <ul style="list-style-type: none"> <li>• UART; 3.3V logic levels 9.6 to 921.6 kbps</li> <li>• USB 2.0 interface (12 Mbps)</li> </ul>  |
| GPIO Sensors and Indicators | Two 3.3V bidirectional ports configurable as input (sensor) ports or output (indicator) ports   |
| API support                 | C#/.NET, Java, C  |

| Power                                   |  |
|---|--|
| DC Power Required                       | DC Voltage: 3.5 to 5.25 V**<br>DC power consumption @ RF level:<br>5.5 W @ +30 dBm***<br>3.5 W @ +27 dBm<br>2.5 W @ +23 dBm<br>2.0 W @ 0 dBm |
| Power Consumption when not transmitting | 0.32 W   |
| Idle Power Saving Options               | Standby: 0.06 W<br>Sleep: 0.008 W<br>Shutdown: 0.0003 W  |
| Environment                             |  |
| Certification                           | FCC 47 CFR Ch. 1 Part 15<br>Industrie Canada RSS-21 0<br>ETSI EN 302 208 v1.4.1  |
| Operating Temp.                         | -20C to +60C (case temperature)  |
| Storage Temp.                           | -40C to +85C   |
| Shock and Vibration                     | Survives 1 meter drop during handling  |
| Performance                             |  |
| Max Read Rate                           | Up to 750 tags/second using high-performance settings  |
| MaxTag Read Distance                    | Over 30 feet (9 m) with 6 dBil antenna (36 dBm EIRP)   |



Specifications subject to change without notice

\*Duty cycle restrictions, based on temperature, apply at power levels above +23 dBm

\*\*Will operate below +3.5 V with reduced input line noise immunity

\*\*\*Best case with good antenna matching

## MAKING RFID EASY TO USE

ThingMagic is dedicated to driving the barriers to deploying RFID technology as low as possible. We design our products to be easy to use out-of-the box and to deliver predictable, reliable, and repeatable performance. Our development tools require little RFID expertise, enabling you to rapidly design, test, and deploy your RFID solutions.


### Developers Kit

Included with every ThingMagic reader Developer Kit, the MercuryAPI supports the entire line of ThingMagic finished readers and embedded RFID modules

- Test chassis
- Cables
- Antenna
- Sample Tags
- Full schematics to help you design your own complimentary components


### Mercury API

A common development platform, supporting an extensive variety of hardware to connect, configure, and control ThingMagic readers.

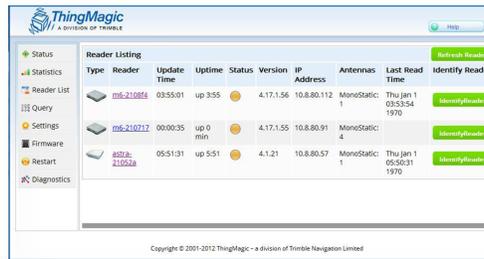

### Universal Reader Assistant

A utility for advanced demo, testing, and tuning of all ThingMagic readers. Reduces complexity for novice users while permitting low-level control for advanced developers.

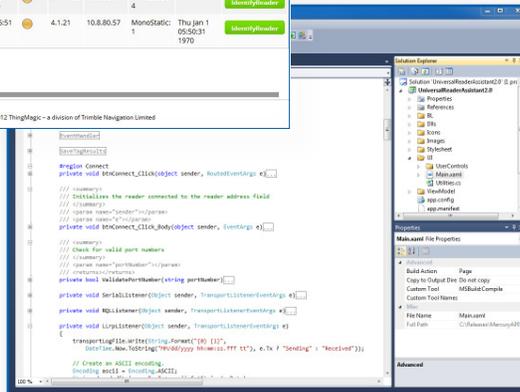

M6e Reader DevKit shown

