



### Taping specifications (Unit : mm)

●VMT3, EMT5/6

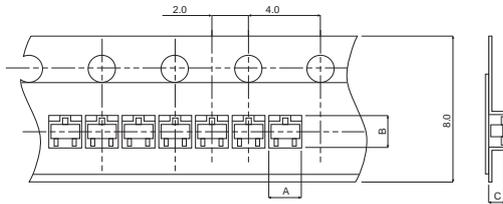


	A	B	C
VMT3	1.65	1.3	0.65
EMT5/6	1.65	1.65	0.65
WEMT6	1.64	1.65	0.72

●EMT3, UMT3/5/6, TUMT3/5/6, SST3, SMT3/5/6, TSMT3/5/6

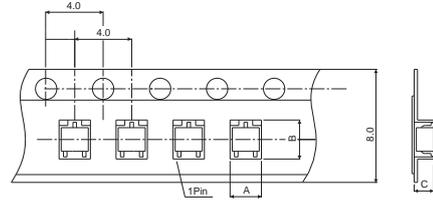


	A	B	C
EMT3	1.8	1.8	0.9
UMT3/5/6	2.2	2.4	1.15
TUMT3/5/6	2.2	2.4	0.98
SST3	3.1	2.7	1.2
TSST8	3.2	2.2	0.95
SMT3/5/6	3.1	3.2	1.35
TSMT3/5/6	3.1	3.2	1.1
TSMT8	3.2	3.1	0.95

●MPT3

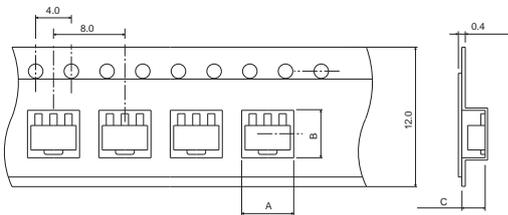


	A	B	C
MPT3	4.9	4.5	1.9

●SOP8

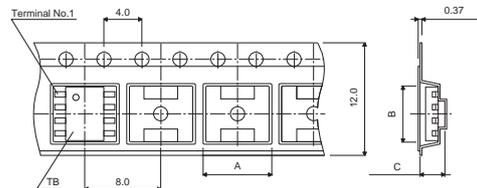


	A	B	C
SOP8	6.7	5.55	2.4

●CPT3

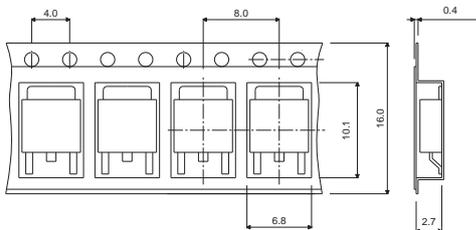

●LPTS

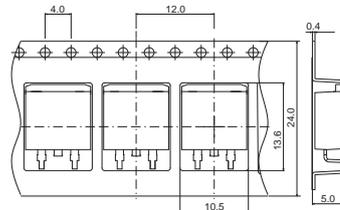

## Packaging type

Package	Code	Packaging style	Direction	Basic ordering unit (pcs)
VML0806	T2L,T2CL	Embossed tape	Terminal No.1 on opposite side from sprocket hole side	8,000
VMT3	T2L,T2CL	Embossed tape	One terminal on sprocket hole side	8,000
VMT6	T2R,T2CR	Embossed tape	Terminal No.1 on sprocket hole side	8,000
EMT3F	TL,TCL	Embossed tape	One terminal on sprocket hole side	3,000
EMT3	TL,TCL	Embossed tape	One terminal on sprocket hole side	3,000
EMT5	T2R,T2CR	Embossed tape	Three terminals on sprocket hole side	8,000
EMT6	T2R,T2CR	Embossed tape	Terminal No.1 on sprocket hole side	8,000
UMT3F	TL,TCL	Embossed tape	One terminal on sprocket hole side	3,000
UMT3	T106,T306	Embossed tape	One terminal on sprocket hole side	3,000
UMT5	TR,TCR	Embossed tape	Three terminals on sprocket hole side	3,000
UMT6	TR,TCR	Embossed tape	Terminal No.1 on sprocket hole side	3,000
	TN,TCN	Embossed tape	Non-direction	3,000
WEMT6	T2R,T2CR	Embossed tape	Terminal No.1 on sprocket hole side	8,000
TUMT3	TL,TCL	Embossed tape	One terminal on sprocket hole side	3,000
TUMT5	TR,TCR	Embossed tape	Terminal No.1 on sprocket hole side	3,000
TUMT6	TR,TCR	Embossed tape	Terminal No.1 on sprocket hole side	3,000
SST3	T116,T316	Embossed tape	One terminal on sprocket hole side	3,000
SMT3	T146	Embossed tape	One terminal on sprocket hole side	3,000
SMT5	T148	Embossed tape	Three terminals on sprocket hole side	3,000
SMT6	T108	Embossed tape	Terminal No.1 on opposite side from sprocket hole side	3,000
	T110	Embossed tape	Non-direction	3,000
TSST8	TR,TCR	Embossed tape	Terminal No.1 on sprocket hole side	3,000
TSMT3	TL,TCL	Embossed tape	One terminal on sprocket hole side	3,000
TSMT5	TR,TCR	Embossed tape	Terminal No.1 on sprocket hole side	3,000
TSMT6	TR,TCR	Embossed tape	Terminal No.1 on sprocket hole side	3,000
TSMT8	TR,TCR	Embossed tape	Terminal No.1 on sprocket hole side	3,000
HUML2020L3	TL,TCL	Embossed tape	Terminal No.1 on opposite side from sprocket hole side	3,000
HUML2020L8	TR,TCR	Embossed tape	Terminal No.1 on sprocket hole side	3,000
HSMT8	TB,TCB	Embossed tape	Terminal No.1 on sprocket hole side	3,000
SOP8	TB	Embossed tape	Terminal No.1 on sprocket hole side	2,500
HSOP8	TB	Embossed tape	Three terminals on sprocket hole side	3,000
PSOP8	TB	Embossed tape	Three terminals on sprocket hole side	2,500
MPT3	T100	Embossed tape	Three terminals on sprocket hole side	1,000
CPT3	TL	Embossed tape	Fin on sprocket hole side	2,500
TO-252E	TL	Embossed tape	Fin on sprocket hole side	2,500
LPT	TL	Embossed tape	Fin on sprocket hole side	1,000
TO-220FM	-	Embossed tape	Box	500
TO-3PF	-	bulk	Tube	360
TO-247	-	bulk	Tube	450
TO-247 Plus	-	bulk	Tube	450

## Notes

- 1) The information contained herein is subject to change without notice.
- 2) Before you use our Products, please contact our sales representative and verify the latest specifications :
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors.  
Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Products beyond the rating specified by ROHM.
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products are intended for use in general electronic equipment (i.e. AV/OA devices, communication, consumer systems, gaming/entertainment sets) as well as the applications indicated in this document.
- 7) The Products specified in this document are not designed to be radiation tolerant.
- 8) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.
- 9) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 10) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 11) ROHM has used reasonable care to ensure the accuracy of the information contained in this document. However, ROHM does not warrant that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 12) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting from non-compliance with any applicable laws or regulations.
- 13) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 14) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.



Thank you for your accessing to ROHM product informations.  
More detail product informations and catalogs are available, please contact us.

## ROHM Customer Support System

<http://www.rohm.com/contact/>