

Features

- Lead free device (RoHS compliant*)
- Low profile
- Low power loss, high efficiency
- UL 94V-0 classification

Applications


- High frequency switching power supplies
- Inverters
- Free wheeling
- Polarity protection

CD2010-B160 - Surface Mount Schottky Rectifier Diode

General Information

The markets of portable communications, computing and video equipment are challenging the semiconductor industry to develop increasingly smaller electronic components. Bourns offers Schottky Rectifier Diodes for rectification applications, in compact chip package 2010 size format, which offer PCB real estate savings and are considerably smaller than most competitive parts. The Schottky Rectifier Diodes offer a forward current of 1 A with a repetitive peak reverse voltage of 60 V.

Bourns® Chip Diodes conform to JEDEC standards, are easy to handle on standard pick and place equipment and their flat configuration minimizes roll away.



Electrical Characteristics (@ T_A = 25 °C Unless Otherwise Noted)

Parameter	Symbol	Min.	Nom.	Max.	Unit
DC Blocking Voltage	VDC			60	V
RMS Voltage	VRMS			42	V
Repetitive Peak Reverse Voltage	VRRM			60	V
Average Forward Rectified Current ¹	I(AV)			1.0	А
Instantaneous Forward Voltage @ I _F = 1.0 A	VF		0.52	0.58	V
Reverse Leakage Current @ rated V _{DC} (@T _J = 25 °C)	lR			0.5	mA
Reverse Leakage Current @ rated V _{DC} (@T _J = 100 °C)	lR			10	mA
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	Ігэм			50	А

Notes

Thermal Characteristics (@ T_A = 25 °C Unless Otherwise Noted)

Parameter	Symbol	Min.	Nom.	Max.	Unit
Thermal Resistance	R _θ JA R _θ JL		75 17		°C/W
Junction Temperature Range	TJ			+125	°C
Storage Temperature Range	Тѕтс	-50	+25	+150	°C


¹ See Forward Derating Curve.

CD2010-B160 - Surface Mount Schottky Rectifier Diode

BOURNS®


Product Dimensions

This is a lead free product, packaged with FRP substrate and is epoxy underfilled. The terminals are pure tin plated and are solderable per MIL-STD-750, Method 2026. The package weighs approximately 0.02 g. The package and dimensions are shown below.




Recommended Footprint


The device will mount onto existing JEDEC SOD-106 footprint.

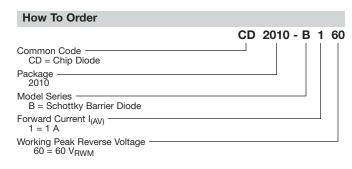

Packaging Information

The product will be dispensed in Tape and Reel format (see diagram below).

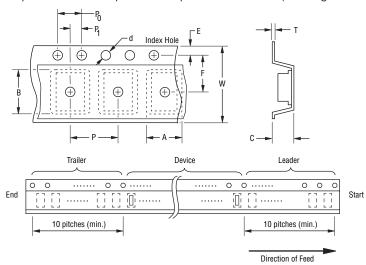



Devices are packed in accordance with EIA standard RS-481-A and specifications shown here.


Item	Symbol	2010		
Carrier Width	A	2.80 ±0.10		
Carrier Width	A	(0.110 ±0.004)		
Carrier Length	В	5.00 ±0.10		
Carrier Lerigiii		(0.197 ±0.004)		
Carrier Depth	С	1.55 ±0.10		
		(0.061 ±0.004)		
Sprocket Hole	d	1.55 ±0.05		
oproduct risio		(0.061 ±0.002)		
Reel Outside Diameter	D	178		
		(7.008)		
Reel Inner Diameter	D ₁	80.0 Min.		
	'	(3.150)		
Feed Hole Diameter	D ₂	13.0 ±0.20		
		(0.512 ±0.008) 1.75 ±0.10		
Sprocket Hole Position	E	$\frac{1.73 \pm 0.10}{(0.069 \pm 0.004)}$		
	F	3.50 ±0.05		
Punch Hole Position		(0.138 ±0.002)		
	Р	4.00 ±0.10		
Punch Hole Pitch		(0.157 ±0.004)		
	P ₀	4.00 ±0.10		
Sprocket Hole Pitch		$\overline{(0.157 \pm 0.004)}$		
Embossment Center	р.	2.00 ±0.05		
Embossment Center	P ₁	(0.079 ±0.002)		
Overell Tapa Thickness	Т	0.20 ±0.10		
Overall Tape Thickness	'	(0.008 ±0.004)		
Tape Width	W	8.00 ±0.20		
Tape Width		(0.315 ±0.008)		
Reel Width	W ₁	$\frac{13.5}{(0.531)}$ Max.		
Quantity per Reel	_	2,500		

CD2010-B160 – Surface Mount Schottky Rectifier Diode


BOURNS

Performance Graphs


Forward Current Derating Curve




Maximum Non-Repetitive Surge Current




Typical Forward Characteristics



Typical Reverse Characteristics



Typical Junction Capacitance





Reliable Electronic Solutions

Asia-Pacific:

Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

Europe:

Tel: +41-41 768 5555 • Fax: +41-41 768 5510

The Americas:

Tel: +1-951 781-5500 • Fax: +1-951 781-5700

www.bourns.com

COPYRIGHT© 2005, BOURNS, INC. LITHO IN U.S.A., IPA0508 10/05

Specifications are subject to change without notice. Customers should verify actual device performance in their specific applications.