

CS1501 90W, High-efficiency PFC Demonstration Board

Features

- Variable On Time, Variable Frequency, DCM PFC Controller
- Line Voltage Range: 90 to 265 VAC RMS
- Output voltage: 400 V
- Rated Pout: 90 W
- Efficiency: 97% @ 90 W, 230 VAC
- No-load Power Dissipation: <0.3 W
- Low Component Count
- Supports Cirrus Logic Product CS1501

General Description

The CDB150x-01 board demonstrates the performance of the CS1501 digital PFC controller with a 90 watt output at a link voltage of 400 volts.

ORDERING INFORMATION

CDB150x-01 PFC Demonstration Board - Supports CS1501



Actual Size:
254mm x 44mm



IMPORTANT SAFETY INSTRUCTIONS

Read and follow all safety instructions prior to using this demonstration board.

This Engineering Evaluation Unit or Demonstration Board must only be used for assessing IC performance in a laboratory setting. This product is not intended for any other use or incorporation into products for sale.

This product must only be used by qualified technicians or professionals who are trained in the safety procedures associated with the use of demonstration boards.

DANGER Risk of Electric Shock

- The direct connection to the AC power line and the open and unprotected boards present a serious risk of electric shock and can cause serious injury or death. Extreme caution needs to be exercised while handling this board.
- Avoid contact with the exposed conductor or terminals of components on the board. High voltage is present on exposed conductor and it may be present on terminals of any components directly or indirectly connected to the AC line.
- Dangerous voltages and/or currents may be internally generated and accessible at various points across the board.
- Charged capacitors store high voltage, even after the circuit has been disconnected from the AC line.
- Make sure that the power source is off before wiring any connection. Make sure that all connectors are well connected before the power source is on.
- Follow all laboratory safety procedures established by your employer and relevant safety regulations and guidelines, such as the ones listed under, OSHA General Industry Regulations - Subpart S and NFPA 70E.

WARNING Suitable eye protection must be worn when working with or around demonstration boards. Always comply with your employer's policies regarding the use of personal protective equipment.

WARNING All components, heat sinks or metallic parts may be extremely hot to touch when electrically active.

WARNING Heatsinking is required for Q1. The end product should use tar pitch or an equivalent compound for this purpose. For lab evaluation purposes, a fan is recommended to provide adequate cooling.

Contacting Cirrus Logic Support

For all product questions and inquiries contact a Cirrus Logic Sales Representative. To find the one nearest to you go to www.cirrus.com

IMPORTANT NOTICE

Cirrus Logic, Inc. and its subsidiaries ("Cirrus") believe that the information contained in this document is accurate and reliable. However, the information is subject to change without notice and is provided "AS IS" without warranty of any kind (express or implied). Customers are advised to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, indemnification, and limitation of liability. No responsibility is assumed by Cirrus for the use of this information, including use of this information as the basis for manufacture or sale of any items, or for infringement of patents or other rights of third parties. This document is the property of Cirrus and by furnishing this information, Cirrus grants no license, express or implied under any patents, mask work rights, copyrights, trademarks, trade secrets or other intellectual property rights. Cirrus owns the copyrights associated with the information contained herein and gives consent for copies to be made of the information only for use within your organization with respect to Cirrus integrated circuits or other products of Cirrus. This consent does not extend to other copying such as copying for general distribution, advertising or promotional purposes, or for creating any work for resale.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). CIRRUSS PRODUCTS ARE NOT DESIGNED, AUTHORIZED OR WARRANTED FOR USE IN PRODUCTS SURGICALLY IMPLANTED INTO THE BODY, AUTOMOTIVE SAFETY OR SECURITY DEVICES, LIFE SUPPORT PRODUCTS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF CIRRUSS PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK AND CIRRUSS DISCLAIMS AND MAKES NO WARRANTY, EXPRESS, STATUTORY OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE, WITH REGARD TO ANY CIRRUSS PRODUCT THAT IS USED IN SUCH A MANNER. IF THE CUSTOMER OR CUSTOMER'S CUSTOMER USES OR PERMITS THE USE OF CIRRUSS PRODUCTS IN CRITICAL APPLICATIONS, CUSTOMER AGREES, BY SUCH USE, TO FULLY INDEMNIFY CIRRUSS, ITS OFFICERS, DIRECTORS, EMPLOYEES, DISTRIBUTORS AND OTHER AGENTS FROM ANY AND ALL LIABILITY, INCLUDING ATTORNEYS' FEES AND COSTS, THAT MAY RESULT FROM OR ARISE IN CONNECTION WITH THESE USES.

Cirrus Logic, Cirrus, and the Cirrus Logic logo designs are trademarks of Cirrus Logic, Inc. All other brand and product names in this document may be trademarks or service marks of their respective owners.

1. INTRODUCTION

The CS1501 is a high-performance Variable Frequency Discontinuous Conduction Mode (VF-DCM), active Power Factor Correction (PFC) controller, optimized to deliver the lowest system cost in switched mode power supply (SMPS) applications. The CS1501 uses a digital control algorithm that is optimized for high efficiency and near-unity power factor over a wide input voltage range (90-265 VAC).

Using an adaptive digital control algorithm, both the ON time and the switching frequency are varied on a cycle-by-cycle basis over the entire AC line to achieve close-to-unity power factor. The feedback loop is closed through an integrated digital control system within the IC.

The variation in switching frequency also provides a spread-frequency spectrum, thus minimizing the conducted EMI filtering requirements. Burst mode control minimizes the light-load/standby losses. Protection features such as overvoltage, overcurrent, overpower, open circuit, overtemperature, and brownout help protect the device during abnormal transient conditions. Details of these features are provided in the CS1501 data sheets.

The CDB150x-01 board demonstrates the performance of the CS1501 with input voltage range of 90-265 VAC, typically seen in universal input applications. This board has been designed for 400V V_{link} , 90 Watts, full load.

Extreme caution needs to be exercised while handling this board. This board is to be used by trained professionals only. Prior to applying AC power to the CDB150x-01 board, the CS1501 needs to be biased using an external 13 VDC power supply.

This document provides the schematic for the board. It includes oscilloscope screen shots that indicate operating waveforms. Graphs are also provided that document the performance of the board in terms of Efficiency vs. Load, Total Harmonic Distortion vs. Load, and Power Factor vs. Load for the CS1501 PFC controller IC.

2. SCHEMATIC

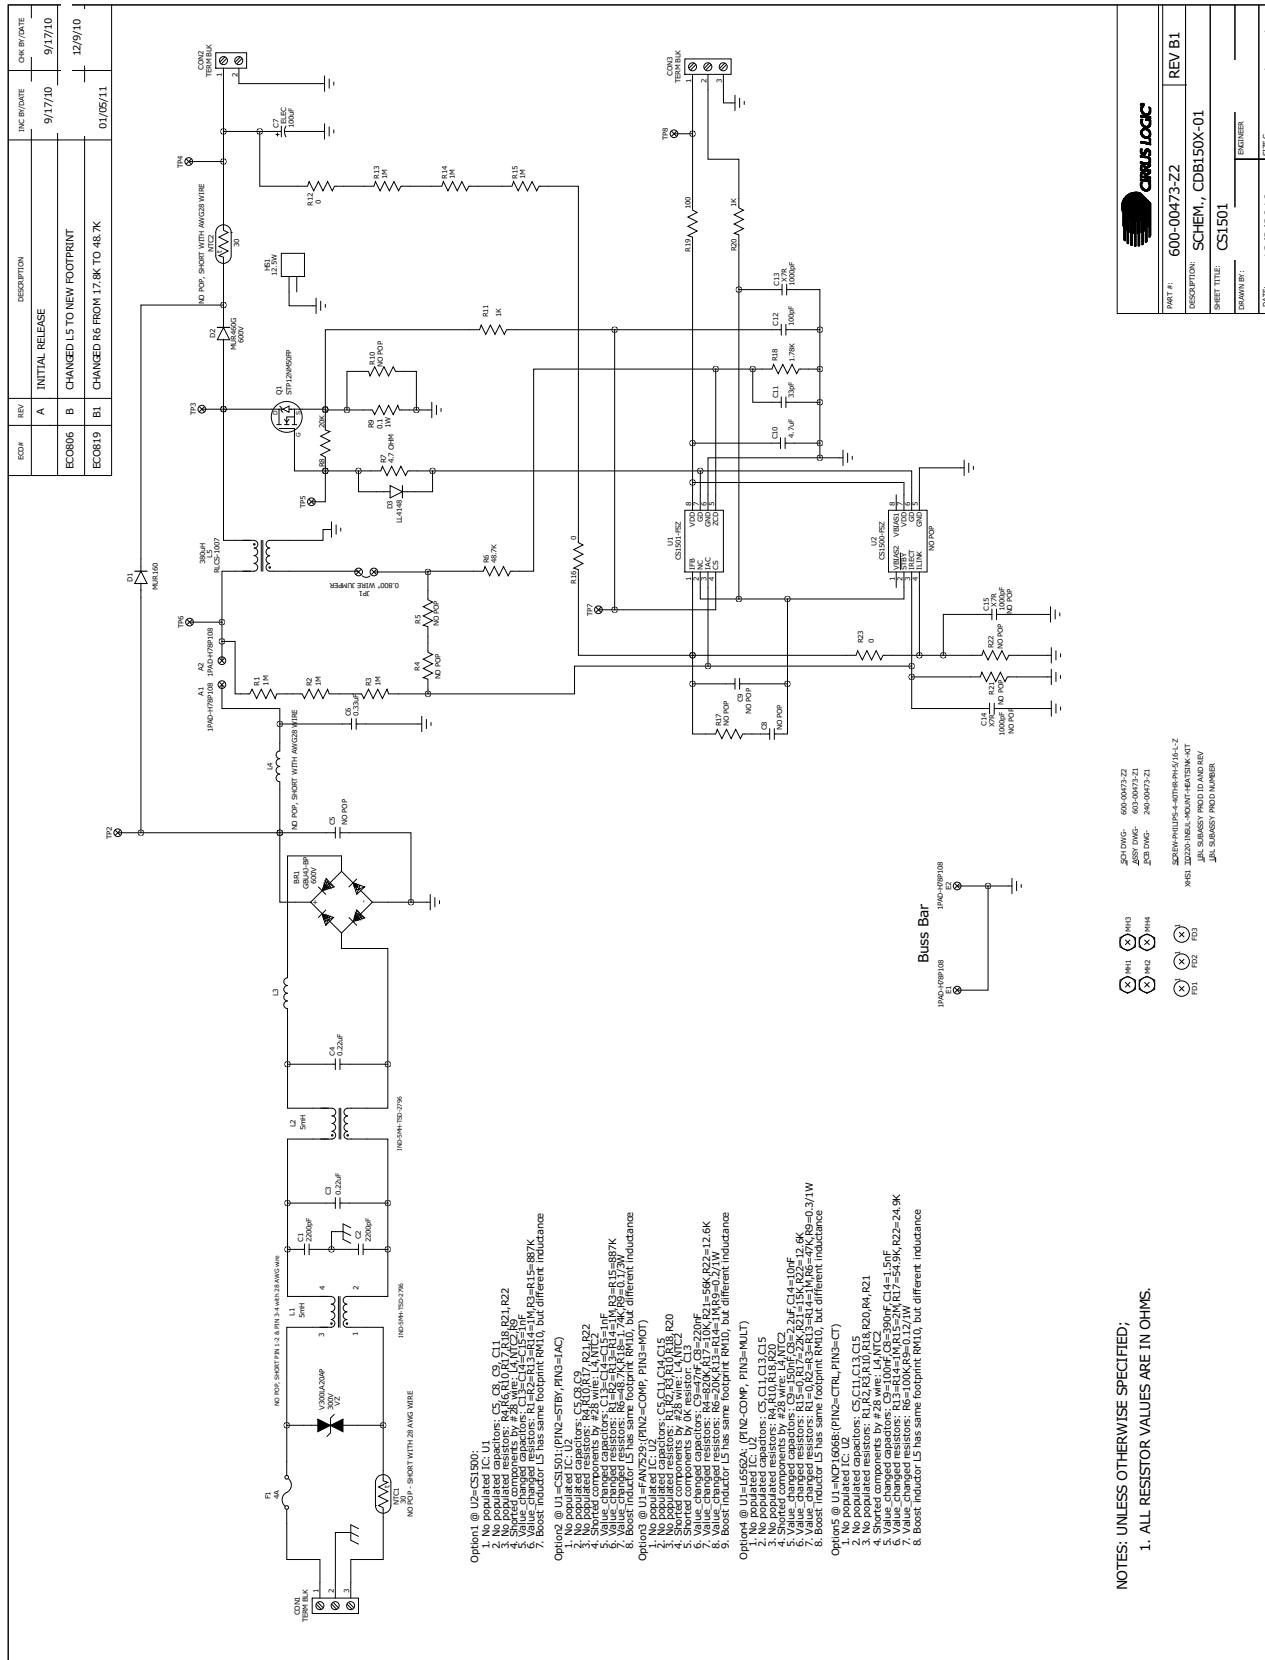


Figure 1. Schematic

3. BILL OF MATERIALS

BILL OF MATERIAL (Page 1 of 2)
**CIRRUS LOGIC
CDB150x-01 Rev. C**

Item	Circuit PIN	Rev	Description	Qty	Reference Designator	MFG	PN	Notes
1	070-00157-Z1	A	DIODE RECT BRIDGE 600V 4A NpB GBU	1	BR1	MICRO COMMERCIAL CO	GB44-BP	
2	011-00042-Z1	A	CAP 2200pF ±10% 2000V CER NpB RAD	2	C1 C2	MURATA	DEB83D222KA2B	
3	011-00055-Z1	A	CAP 0.22uF ±20% 305V PLY FILM NpB TH	0	C3	EPCOS	B32923C3224M	DO NOT POPULATE ECO841
4	011-00064-Z1	A	CAP 0.22uF ±20% 330V PLY FILM NpB TH	1	C4	EPCOS	B32922B3224M	DO NOT POPULATE ECO841
5	011-00040-Z1	A	CAP 0.47uF ±20% 305V PLY FILM NpB TH	0	C5	PANASONIC	B32922C3474M	DO NOT POPULATE ECQG6334KF
6	013-00034-Z1	A	CAP 0.33uF ±10% 330V POLY NpB RAD	1	C6	NICHICON	UVZWW101MRD	
7	012-00181-Z1	A	CAP 100uF ±20% 450V ELEC NpB RAD	1	C7	NO POP	NP-CAP-1206	DO NOT POPULATE TDK
8	000-00069-Z1	A	NO POP CAP NpB 1206	0	C8 C9	NO POP	NP-CAP-1206	DO NOT POPULATE C3216X7TR1E475M
9	001-10233-Z1	A	CAP 7.1uF ±20% 23V XTR NpB 1206	1	C10	TDK	C1206C310J5GAC	
10	001-05280-Z1	A	CAP 0.22uF ±5% 50V CIG NpB 1206	1	C11	KEMET	C1206C101J5GAC	
11	001-05452-Z1	A	CAP 100pF ±15% 50V CIG NpB 1206	1	C12	KEMET	C1206C102J5RAC	DO NOT POPULATE C1206C102J5RAC
12	001-06036-Z1	A	CAP 1000pF ±15% 50V XTR NpB 1206	1	C13	KEMET	C1206C102J5RAC	
13	001-06035-Z1	A	CAP 1000pF ±15% 50V XTR NpB 1206	0	C14 C15	WEIDMULLER	1716330000	
14	110-00301-Z1	A	CON 3POS TERM BLK 5.08mm SFR NpB RA	2	CON1 CON3	WEIDMULLER	1716320000	
15	110-00302-Z1	A	CON 2POS TERM BLK 5.08mm SFR NpB RA	1	CON2	WEIDMULLER	1716320000	
16	070-00132-Z1	A	DIODE RECT 800V 1A 200mA NpD DOD41	1	D1	DIODES INC.	1N4006G-T	
17	070-00134-Z1	A	DIODE RECT 600V 4A NpD DO-201AD TH	1	D2	ON SEMICONDUCTOR	MUR460G	
18	070-00001-Z1	A	DIODE SS 75V 500mW NpB SOD50	1	D3	DIODES INC.	LL4148	
19	180-00035-Z1	A	FUSE 4A SLO BLO 250V NpB RAD	1	F1	DIODES INC.	LL4148	
20	311-00019-Z1	A	HTSNK W LOCK TAB .5" TO220 NpB	1	HS1	DIODES INC.	RST-4	REQUIRES 1 SCREW, 300-0025-21, 1 WASHER, 301-00013-Z1, 1 NUT, 302-00007-Z1 SEE ASSY DWG FOR LENGTH
21	080-00013-Z1	A	WIRE 24 AWG SOLID PVC INS BLK NpB	1	JPI	ALPHA WIRE COMPANY	305011 BK005	
22	050-00039-Z1	A	XFMR 5mh 1:1 1500Vrms 4PIN NpB TH	0	L1	Premier MAGNETICS	TSD-2796	DO NOT POPULATE, SHORT PIN 1-2 & PIN 3-4 with 28 AWG wire
23	050-00039-Z1	A	XFMR 5mh 1:1 1500Vrms 4PIN NpB TH	1	L2	Premier MAGNETICS	TSD-2796	
24	040-00127-Z1	A	IND 1mH 1.3A ±15% TOR VERT NpB TH	1	L3	BOURNS	2124-V-RC	DO NOT POPULATE, SHORT WITH AWG28 WIRE
25	040-00127-Z1	A	IND 1mH 1.3A ±15% TOR VERT NpB TH	0	L4	BOURNS	2124-V-RC	
26	050-00051-Z1	A	XFMR 380uH 10:1 PFC BOOST NpB TH	1	L5	RENCO	RLCS-1007	DO NOT POPULATE, SHORT WITH AWG28 WIRE
27	304-00044-Z1	A	SPCR STANDOFF 4-40 THR .500" NpB	4	MH1 MH2 MH3 MH4	KEYSTONE	2203	REQUIRES SCREW 4-40X5X16" PH STEEL 300-0025-Z1
28	036-0008-Z1	A	TERM 30 OHM 1.5A 5% NpB RAD	0	NTC1	GE SENSING	CL-210	DO NOT POPULATE, SHORT WITH 28 AWG WIRE
29	036-0008-Z1	A	TERM 30 OHM 1.5A 5% NpB RAD	0	NTC2	GE SENSING	CL-210	DO NOT POPULATE, SHORT WITH AWG28 WIRE
30	071-00083-Z1	A	TRAN MOSFET nCH 12A 500V NpB TO220	1	Q1	ST MICROELECTRONICS	STP12NM50FP	
31	020-06374-Z1	A	RES 1M OHM 1/4W ±1% NpB 1206	6	R1 R2 R3 R13 R14 R15	CRCW12061M00FKEA		
32	001-00004-Z1	A	NO POP RES NpB 1206	0	R4 R5 R17 R21 R22	NPRES-1206	DO NOT POPULATE CRCW12061M00FKEA	
33	020-06376-Z1	A	RES 48.7K OHM 1/4W ±1% NpB 1206	1	R6	CRCW120648K7FKEA	ECO805	
34	020-06389-Z1	A	RES 4.7 OHM 1/4W ±1% NpB 1206	1	R7	CRCW120648K7FKEA		
35	020-06310-Z1	A	RES 20K OHM 1/4W ±1% NpB 1206 FILM	1	R8	CRCW120620K0FKEA		
36	030-00092-Z1	A	RES 0.1 OHM 3W ±1% MN ISEN NpB AXL	1	R9	CRCW120612.1R0UNEG	DO NOT POPULATE	
37	021-01186-Z1	A	RES 1 OHM 1W ±5% NpB 2512 FILM	0	R10	CRCW12061K00FKEA		
38	020-02216-Z1	A	RES 1K OHM 1/4W ±1% NpB 1206 FILM	2	R11 R20	CRCW12061K00FKEA		
39	020-02273-Z1	A	RES 0 OHM 1W NpB 1206 FILM	3	R12 R16 R23	CRCW1206000Z0FA		
40	[021-06391-Z1]	A	RES 1.78K OHM 1W ±1% NpB 1206	1	R18	CRCW12061K78FKEA		

**CIRRUS LOGIC
CDB150X-01_Rev_C**
BILL OF MATERIAL (Page 2 of 2)

Item	Cirrus PIN	Rev	Description	Qty	Reference Designator	MFG	MFG PIN	Notes
41	020402-502-Z1	A	RES 100 OHM 1/4W ±1% NpB 1206 FILM	1	R19	DALE	CRCW1206100RFK1EA	
42	110-00-0025-Z1	A	CON TEST PT. 1" TIN PLATE WHT NpB	7	TP2 TP3 TP4 TP5 TP6 TP7 TP8	KEYSTONE	5002	
43	065-00-328-23	A2	IC CIRUS LPWR FACTOR CORR NpB S01C8	1	U1	CIRRUS LOGIC	CS1501-FSZA2	EC00841
44	065-00-276-25	C1	IC CIRUS LPWR FACTOR CORR NpB S01C8	0	U2	CIRRUS LOGIC	CS1500-FSZA1	DO NOT POPULATE
45	036-00-006-Z1	A	VARISTOR 300V 400mF 14mm NpB RAD	1	VZ	LITTELFUSE	V300LA20A/P	
46	311-00-025-Z1	A	HTSNK TO220 MOUNTING KIT NpB	1	XHS1	AAVID THERMALLOY	4880G	INCLUDES ALL MOUNTING HARDWARE
47	300-00-025-Z1	A	SCREW 4-40X5/16" PH MACH SS NpB	4	XMH1 XMH2 XMH3 XMH4	BUILDING FASTENERS	PMSSS 440 0031 PH	
48	422-00-013-01	C	LBL SUBASSEMBLY PRODUCT ID AND REV	1	CIRRUS LOGIC	422-00013-01		
49	422-00-037-01	C	LBL SUBASSEMBLY PRODUCT NUMBER	1	CIRRUS LOGIC	422-00037-01	SEE ASSY/DWG FOR LABEL PLACEMENT	
50	603-00-0473-Z1	C	ASSY DWG CDB150X-0X-Z-NpB	REF	CIRRUS LOGIC	603-00-0473-Z1	EC0085/EC0324/EC00841	
51	240-00-0473-Z1	C	PCB CDB150X-0X-Z-NpB	1	CIRRUS LOGIC	240-00-0473-Z1	EC0085/EC0324/EC00841	
52	600-00-0473-Z2	C	SCHDEM CDB150X-01-Z-NpB	REF	CIRRUS LOGIC	600-00-0473-Z2	EC00819/EC00841	
	080-00-036-Z1	A	WIRE 22AWG 19/34 STR BLK 105C Np	1	ALPHA WIRE COMPANY	5855-BK005	EC00824, SEE ASSY DWG	
	080-00-002-01	A	WIRE 28/1 AWG, KYNAR MOD, 500FT	1	SQUIRES	L5000UL1422-28/1 BLU	EC00824, SEE ASSY DWG	

4. BOARD LAYOUT

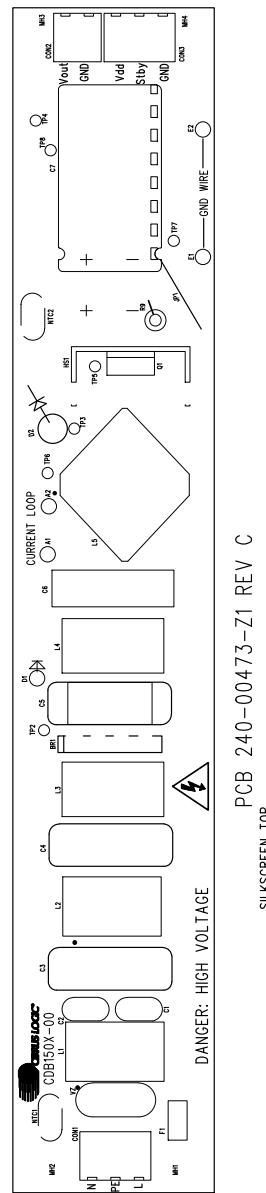


Figure 2. Top Silkscreen

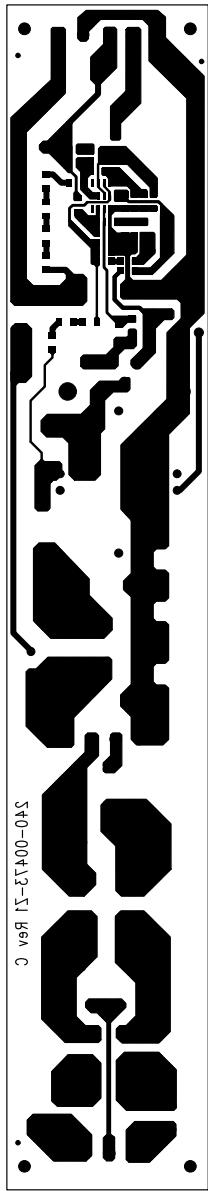


Figure 3. Bottom Routing

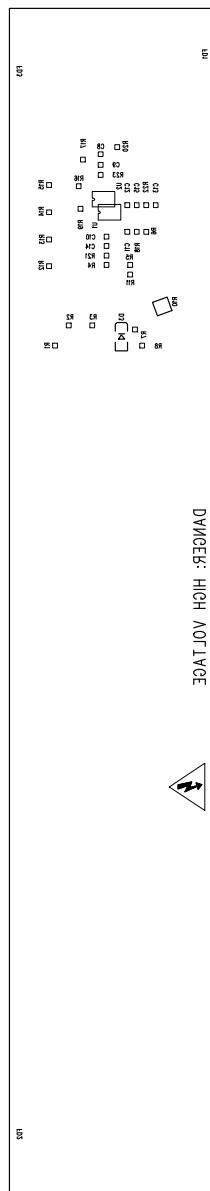


Figure 4. Bottom Silkscreen



Figure 5. Bottom Solder Paste Mask

5. PERFORMANCE PLOTS

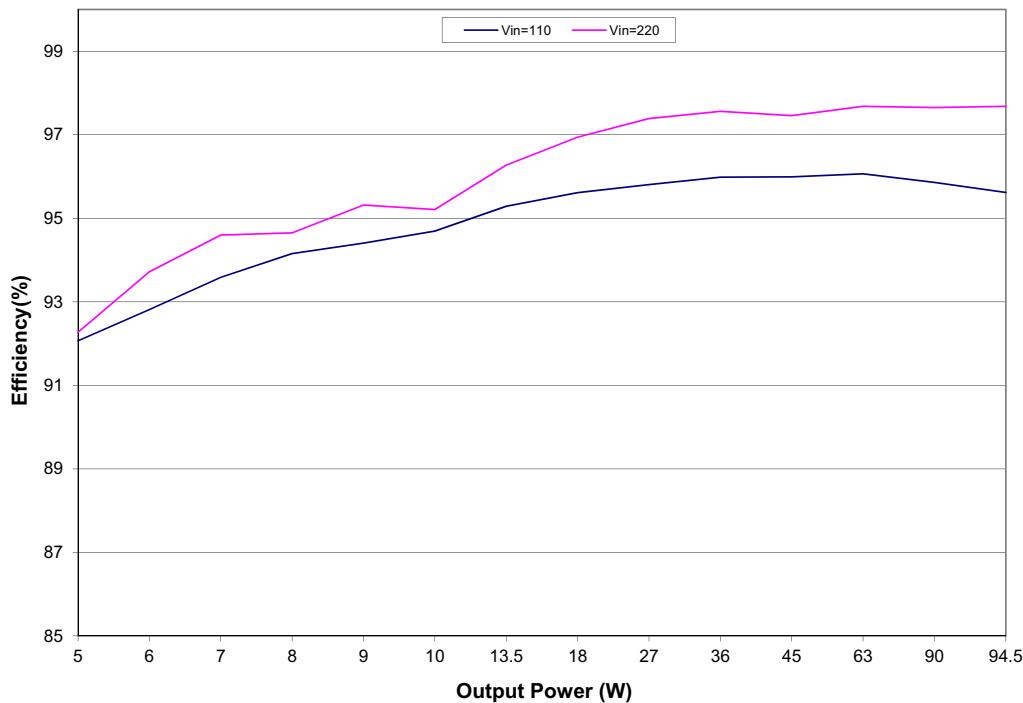


Figure 6. Efficiency vs. Load at 110 VAC, 220 VAC

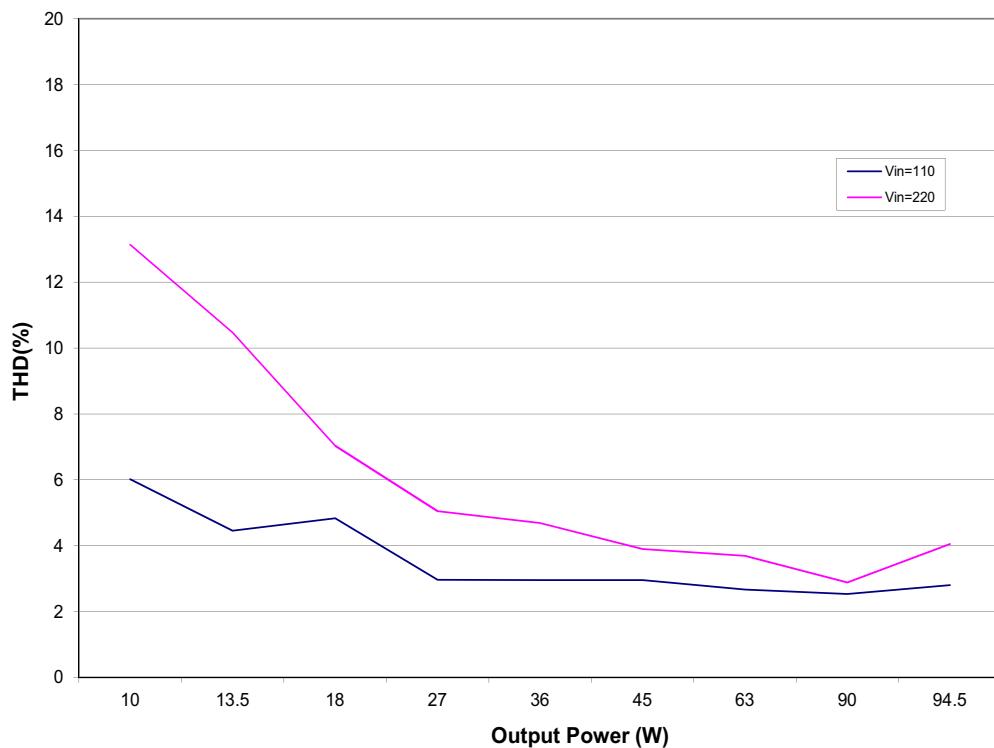


Figure 7. Distortion vs. Load at 110 VAC, 220 VAC

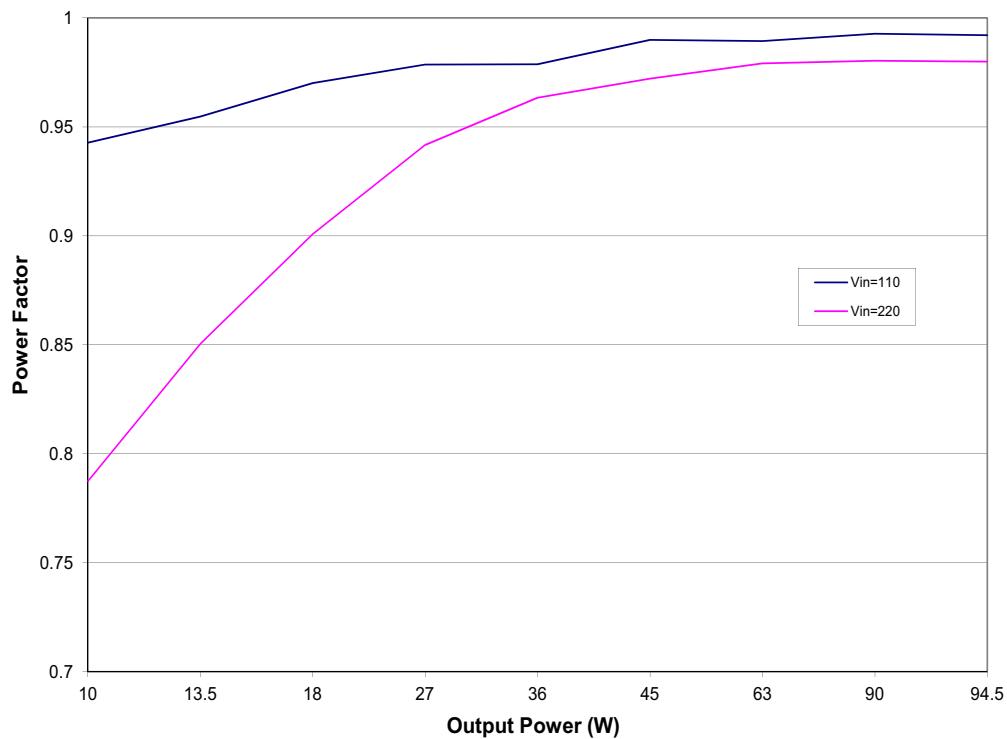


Figure 8. Power Factor vs. Load at 110 VAC, 220 VAC

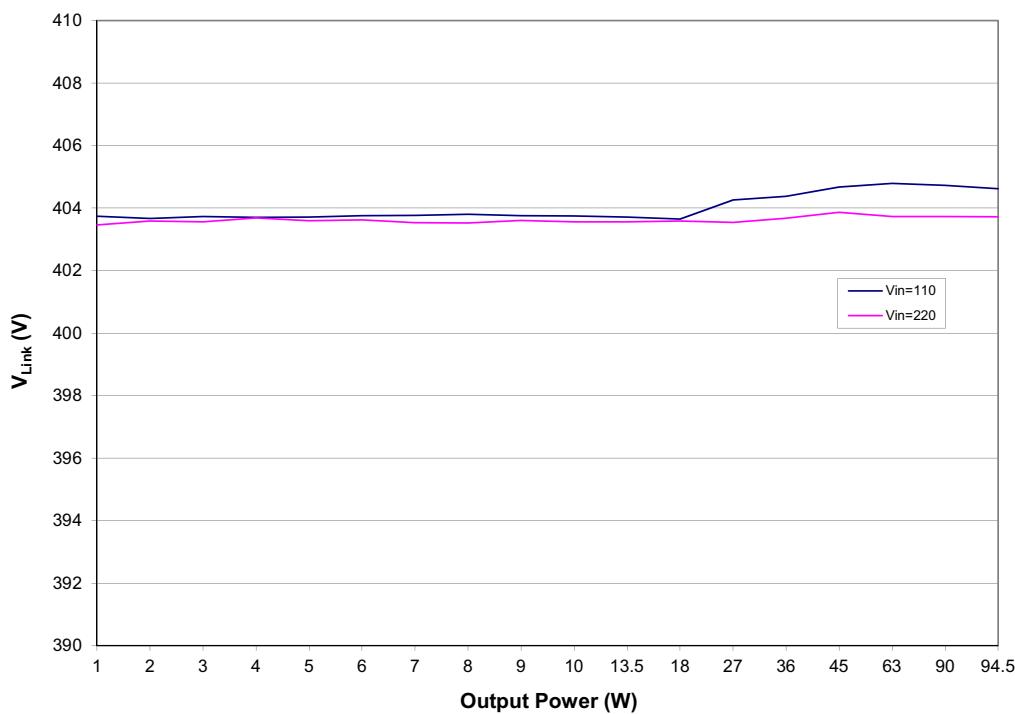


Figure 9. V_{Link} vs. Output Power at 110 VAC, 220 VAC

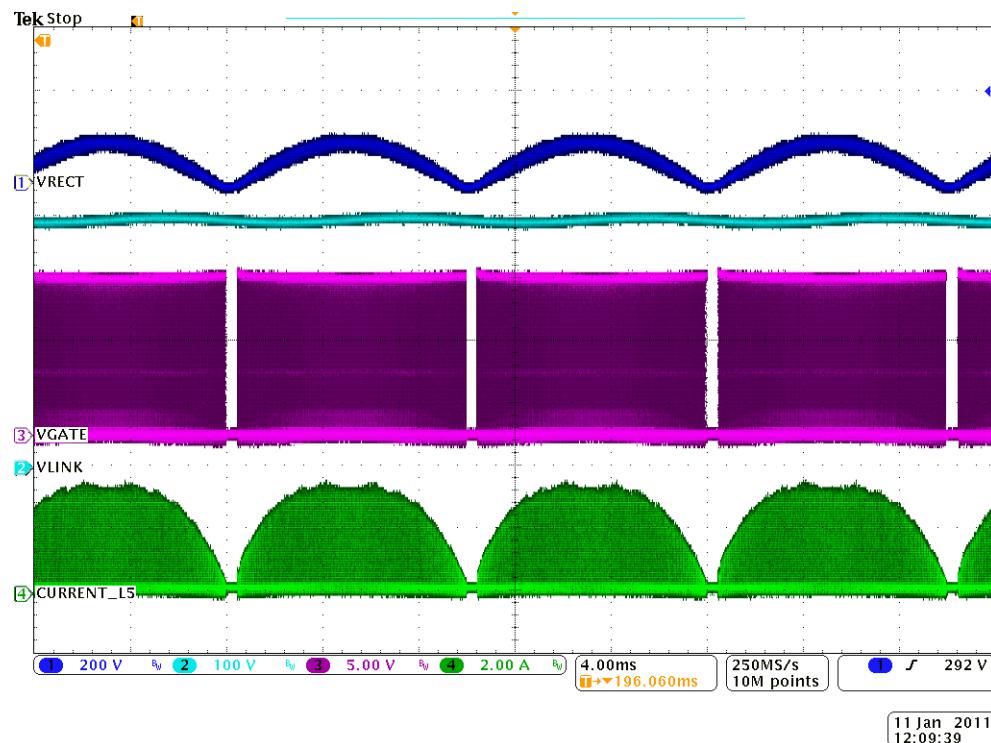


Figure 10. Steady State Waveforms — 110 VAC

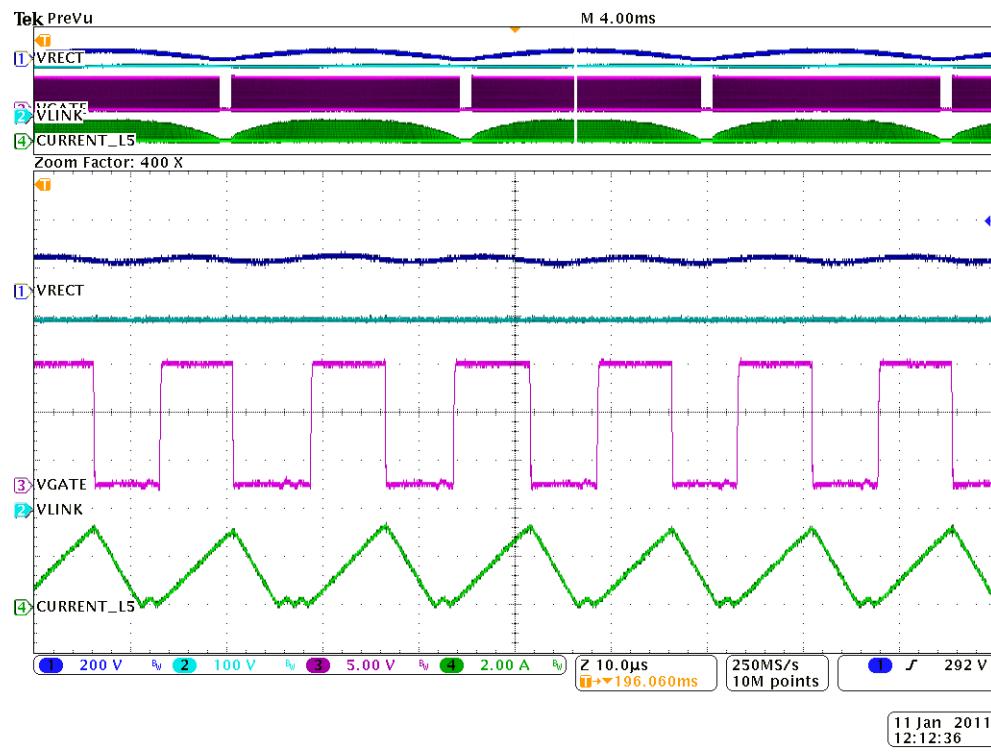


Figure 11. Switching Frequency Profile at Peak of AC Line Voltage — 110 VAC

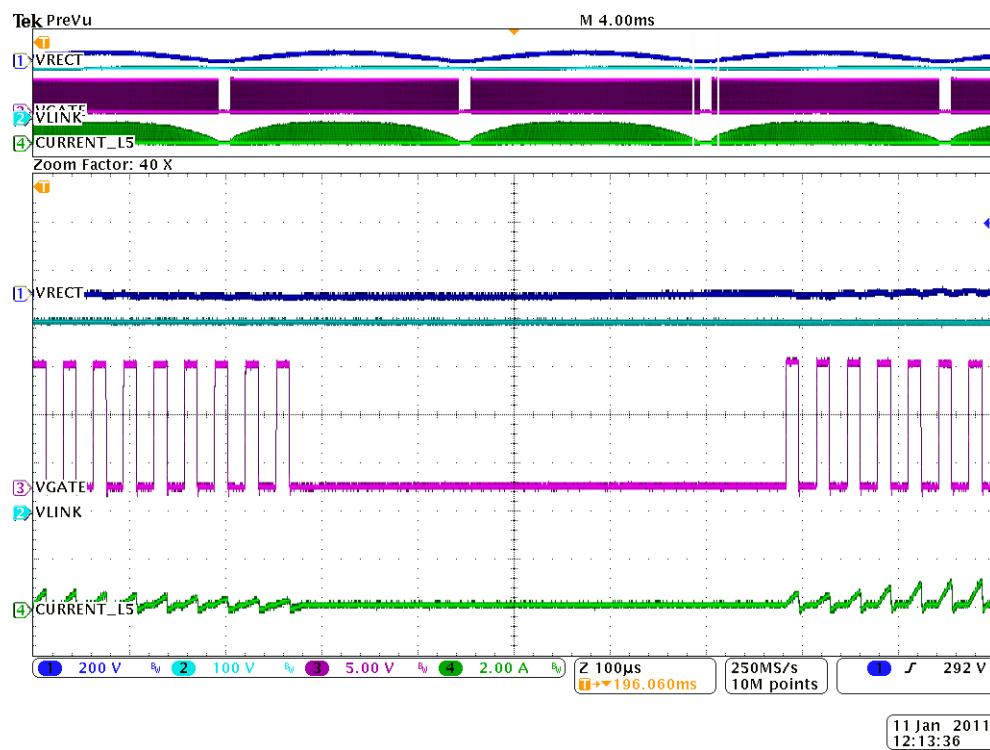


Figure 12. Switching Frequency Profile at Trough of AC Line Voltage — 110 VAC

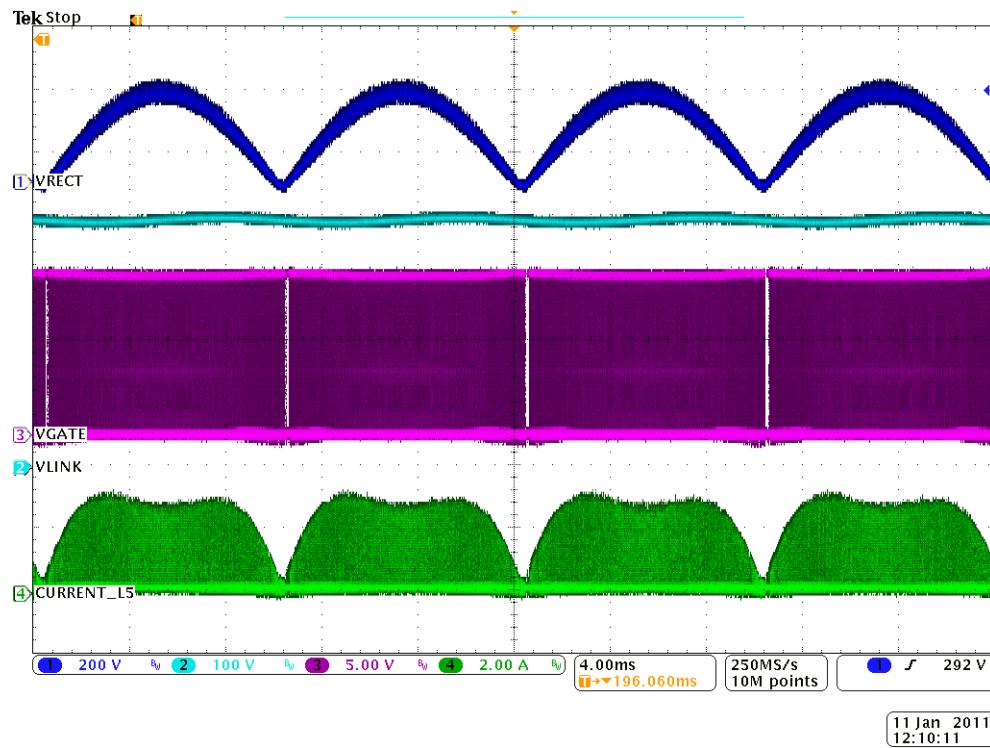


Figure 13. Steady State Waveforms — 220 VAC

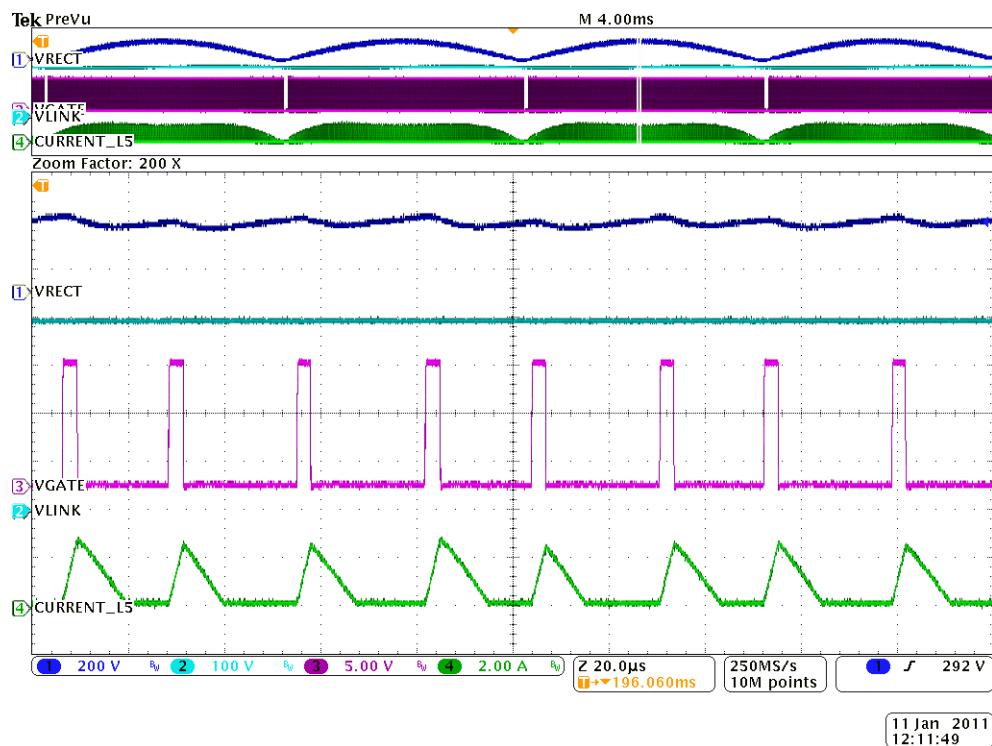


Figure 14. Switching Frequency Profile at Peak of AC Line Voltage — 220 VAC

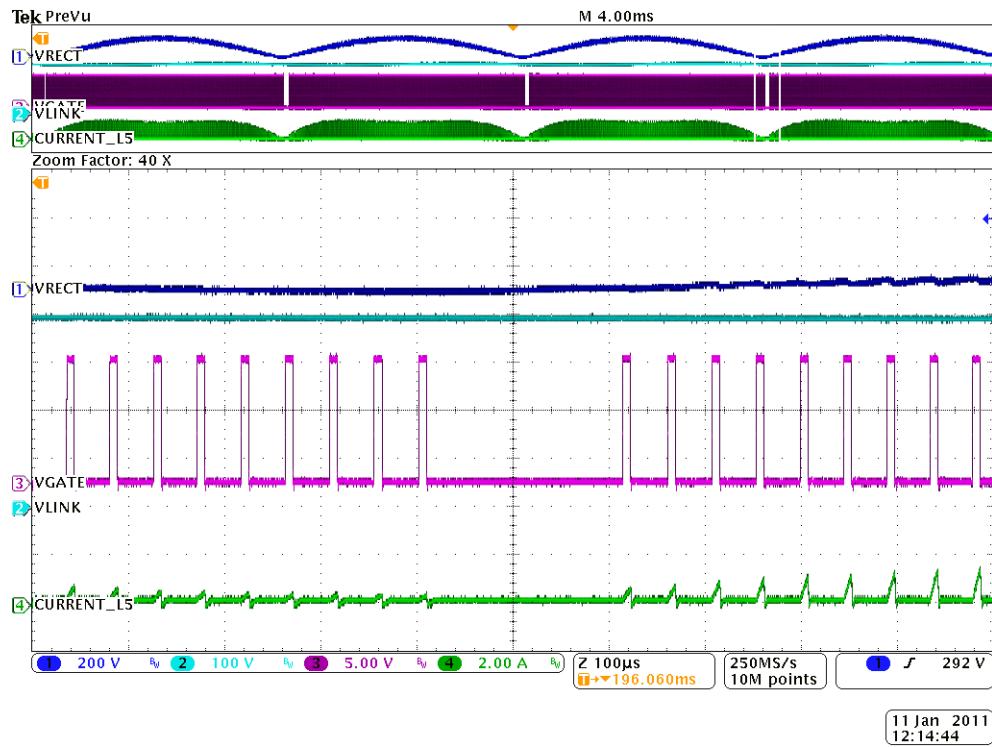


Figure 15. Switching Frequency Profile at Trough of AC Line Voltage — 220 VAC

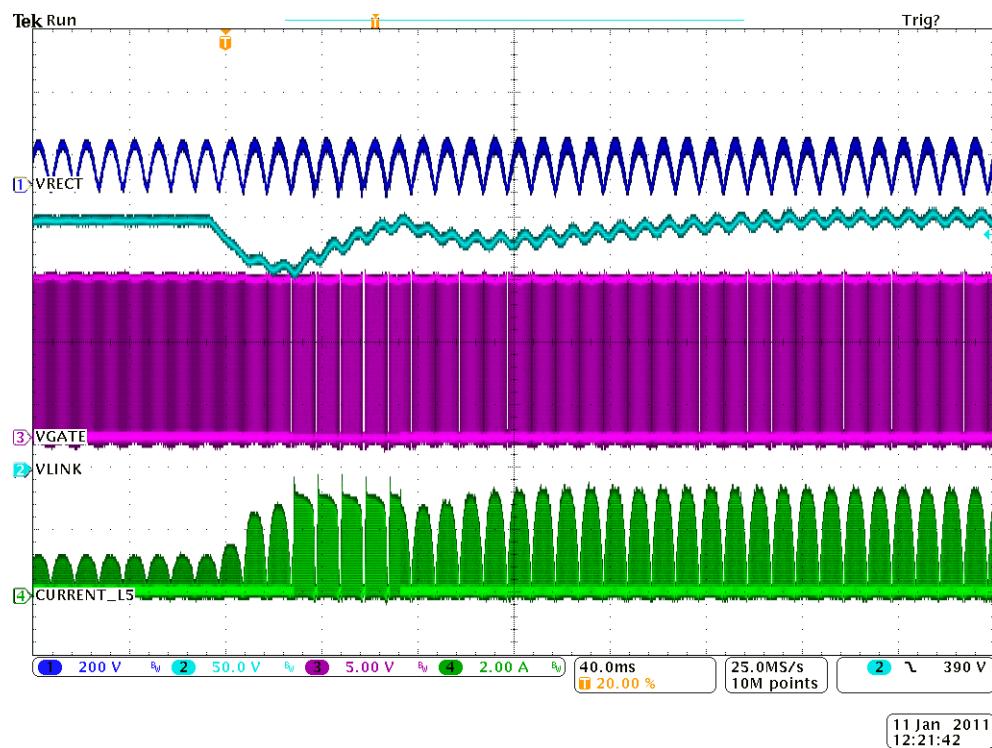


Figure 16. Load Transient — 9 W to 90 W, 1 W/uS, 110 VAC

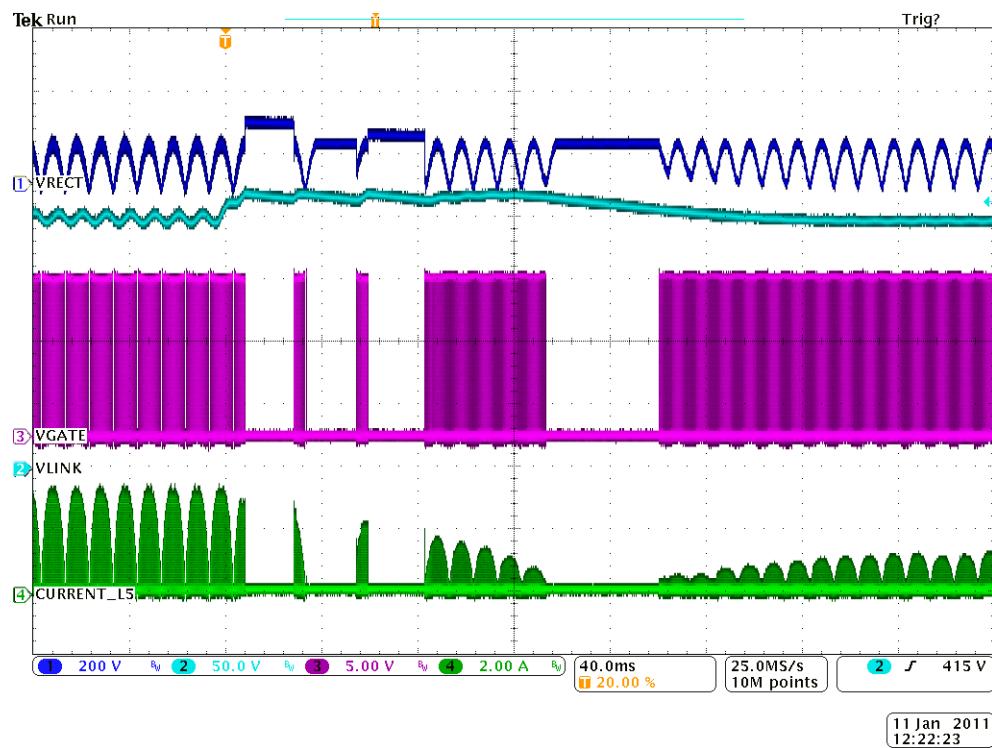


Figure 17. Load Transient — 90 W to 9 W, 1 W/uS, 110 VAC

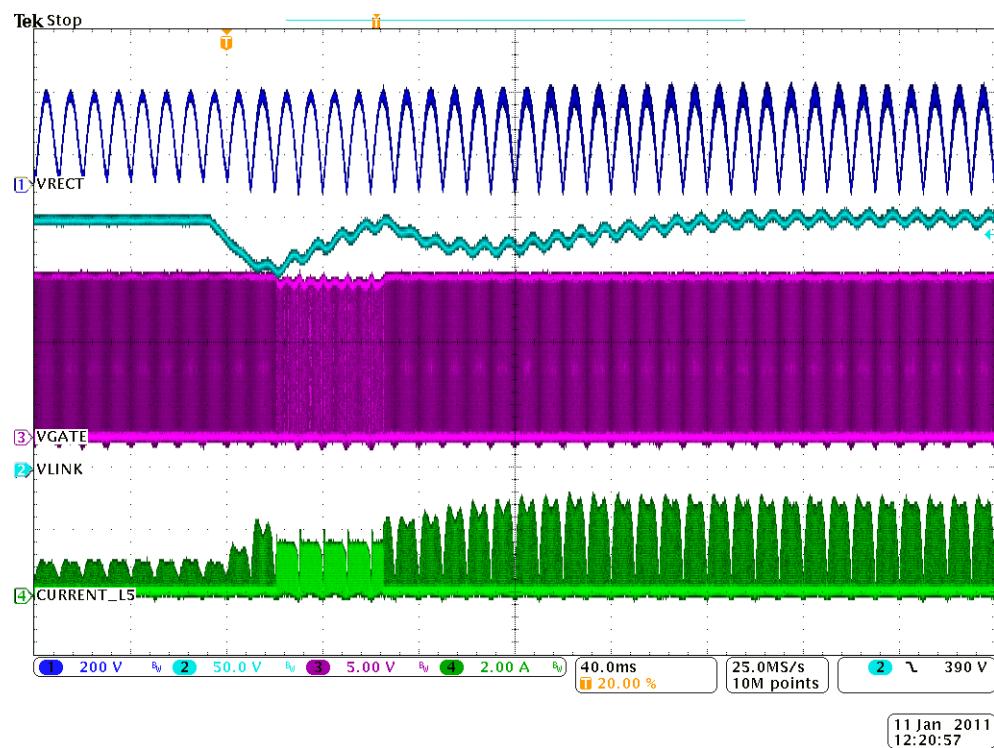


Figure 18. Load Transient — 9 W to 90 W, 1 W/uS, 220 VAC

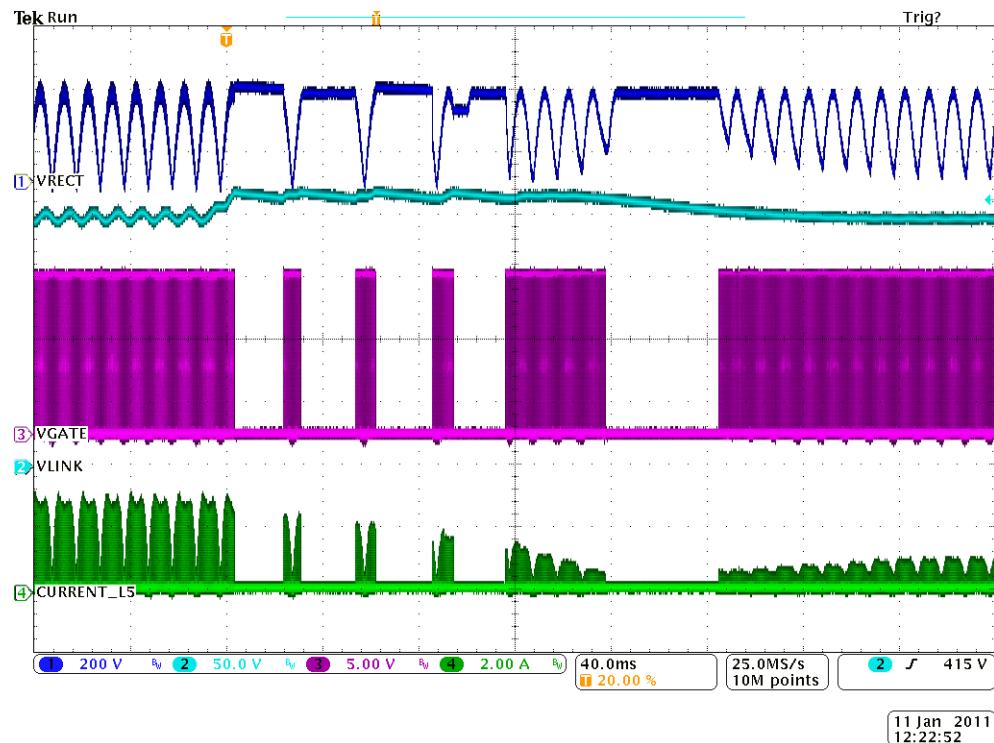


Figure 19. Load Transient — 90 W to 9 W, 1 W/uS, 220 VAC

6. REVISION HISTORY

Revision	Date	Changes
DB1	FEB 2011	Initial Release.
DB2	FEB 2011	Updated Efficiency vs. Load plot with more current data.
DB3	MAR 2011	Updated BOM & Layers to rev C.