SPECIFICATION CONTROL DRAWING

55A6768

TITLE

WIRE, ELECTRIC, TIN-COATED COPPER, NORMAL WEIGHT, 600 VOLT


DATE:

REVISION:

6-18-88

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

CONDUCTOR - TIN-COATED CUPPER UNIDIRECTIONAL LAY INSULATION - RADIATION-CROSSLINKED, MODIFIED ETFE

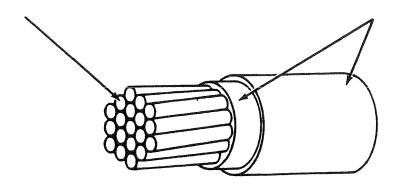

CONSTRUCTION DETAILS							
PART NUMBER	WIRE SIZE (AWG)	CONDUCTOR STRANDING (number x AWG)	DIAMETER STRANDED CONDUCTOR (in.)		FINISHED WIRE		
					MAXIMUM RESISTANCE AT 20°C	DIAMETER (in.)	MAXIMUM WEIGHT (1b/1000 ft.)
			MINIMUM	MAX IMUM	(Ω/1000 ft.)		(15/1000 10.)
55A6768-13-*	18	19 x 30	.046	.0475	6.23	.070 ± .003	7.2

ADDITIONAL REQUIREMENTS

Except as specified above, this construction shall meet all the requirements of Raychem Specification Sheet 55A0811 for AUG 18.

PART NUMBER:

The "*" in the part number above shall be replaced by color code designators.

Example: white: 55A6768-18-9

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

INVITATION FOR BID.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOC-UMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF