


1. Wiring Diagram.

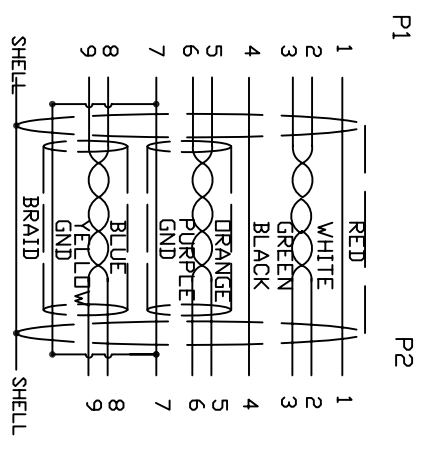

2. Cable test condition :

- Open / Short : 100%
- Insulation resistance : 5M ohms
- Contact resistance : 2 ohm
- Hipot : DC 300V / 1 sec
- 3Each pcs with PE polybag.

5	CONN	USB3.0 A FEMALE G/F BLUE	1	P2	A	INITIAL RELEASE	2014/08/28
4	PVC	45P PVC BLACK OVERMOLD	25g		REV/ECN#	DESCRIPTION	DATE
3	PE	LLDPE 500026 6201	16g		P/N:	103-1010-BL-00200	REV
2	CONN	USB3.0 A/M G/F BLUE	1	P1	TITLE	CABLE USB3.0 AM TO A/F	
1	CABLE	《28AWG (7/0.12TC) *1P+D(7/0.10TC)+AL+M》*2+28AWG (7/0.12TC) *1P+24AWG(7/0.21TC)*2C+A+D+B (96/0.12AM) ODS.5 BLACK	1	2000mm	DRAWN	WENC	DATE
	PART NO.	DESCRIPTION	QTY	UNIT/REF	CHECKED	EDWIN	08/24/14
		BILL OF MATERIAL			APPROVAL		

Cnc Tech,LLC

Customer: _____

Customer P/N: _____

Customer: _____

SHEET 1 OF 1