System No. 16126	59066-010 SENSOR	D10-59066-010

Electrical

CONTACT TYPE	FORM A
CONTACT RATING, MAX.	10 WATTS
SWITCHING VOLTAGE, MAX.	200 VDC
SWITCHING CURRENT, MAX.	0.5 AMPS
CARRY CURRENT, MAX.	1.2 AMPS
CONTACT RESISTANCE INCLUDING LEADS, MAX.	200 mΩ
BREAKDOWN VOLTAGE, MIN.	250 VDC

Physical

CASE:	BLACK UL 94V-O POLYESTER
POTTING:	BLACK EPOXY
LEADS:	24 AWG PVC UL1569 BLACK
MAGNET:	57066-000 or 57065-000
OPERATE DISTANCE:	.150" MIN.
RELEASE DISTANCE:	.800" MAX.



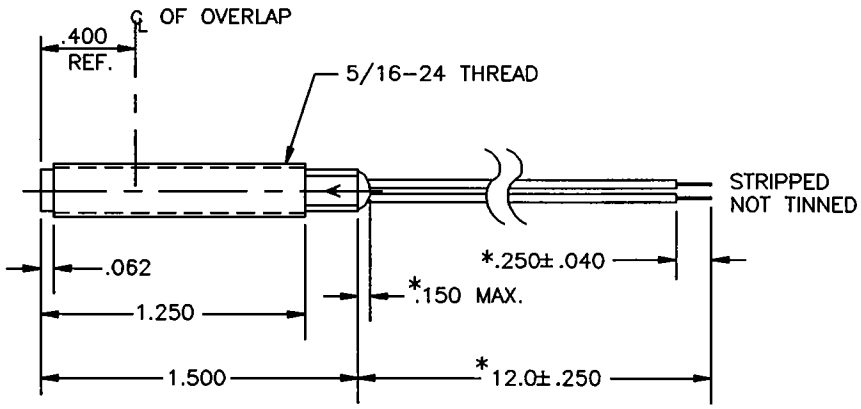



* KEY ASSEMBLY DIMENSIONS
CAPSULE TOLERANCES: ±.010 (0,25) UNLESS NOTED

Print Detail



MARKING MAY VARY DUE TO SPACE LIMITATIONS

© HAMLIN, Incorporated
2003
This design and print is copyright and is the property of HAMLIN, Inc. It must not be copied or permitted to be copied, nor may its contents be divulged to any third party without prior written permission from the company.

59066-010 SENSOR							HAMLIN, Inc.			DCR No. 1220
AC	UPDATE TO NEW FORMAT	A7340	BJE	7/27/98	BJE	8/12/98	Dwn. DRR	DATE 4/19/88		D10-59066-010
REV.	DESCRIPTION OF REVISION	DCR No.	BY	DATE	APP.	DATE	App'd DRR	DATE 6/24/88		Page 1 of 1