


**KEMET Part Number: PME261JB5220KR30**  
(P561QM223K500A)

Capacitor, Film, Metallized Paper, 0.022 uF, +/-10% Tol, -40/+100C, General Purpose, 1000 VDC@85C, Lead Spacing=15.2 mm

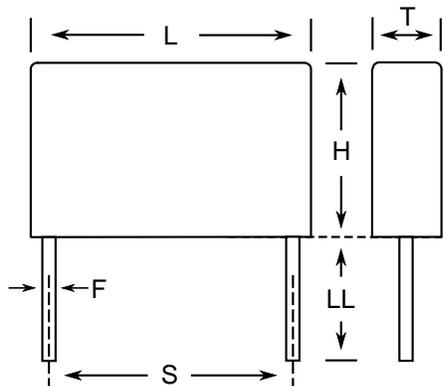

| Dimensions (mm) |           |           |
|-----------------|-----------|-----------|
| Symbol          | Dimension | Tolerance |
| L               | 18.5      | MAX       |
| H               | 13        | MAX       |
| T               | 7.3       | MAX       |
| S               | 15.2      | +/-0.4    |
| LL              | 30        | +5        |
| F               | 0.8       | +/-0.05   |

| Packaging Specifications |      |
|--------------------------|------|
| Package Kind:            | Bulk |
| Package Quantity:        | 400  |

| General Information |                           |
|---------------------|---------------------------|
| Supplier:           | KEMET                     |
| Dielectric:         | Metallized Paper          |
| Application:        | General Purpose           |
| Sub Application:    | DC or Low Frequency Pulse |
| Style:              | Radial Molded             |
| Lead Form:          | Wire Leads                |
| Features:           | Pulse                     |
| RoHS:               | Yes                       |

| Specifications              |                       |
|-----------------------------|-----------------------|
| Capacitance:                | 0.022 uF              |
| Voltage:                    | 1000 VDC              |
| Tolerance:                  | +/-10%                |
| Voltage AC:                 | 500 VAC               |
| Rated Temperature:          | 85C                   |
| Temperature Range:          | -40/+100C             |
| Dissipation Factor @ 1 kHz: | 1.3%                  |
| Insulation Resistance:      | 12 GOhm               |
| Maximum dVdT:               | 2000 v/us             |
| Miscellaneous:              | AC Operation: 70C MAX |