Page 1 of 3 Part Curves

## Steward


Advanced Ferrite Materials, EMI Suppression, and Inductive Products

Home • Ferrite Product Lines • New Products • Technical • General • Contact • Steward Sales

## CM3322P400R-00



Ambient Operating Temperature Range :-55°C to + 125°C




## **Electrical Characteristics**

| NET Z<br>@ 100 MHz | DCR<br>Max | Rated<br>Current<br>mA |  |  |
|--------------------|------------|------------------------|--|--|
| 40                 | 0.030      | 4000                   |  |  |

## **Physical Dimensions**

| Α    | В    | С    | D    | E    | Α     | В     | С     | D     | E     |
|------|------|------|------|------|-------|-------|-------|-------|-------|
| mm   | mm   | mm   | mm   | mm   | in    | in    | in    | in    | in    |
| 8.50 | 5.60 | 2.10 | 2.24 | 0.58 | 0.335 | 0.220 | 0.083 | 0.088 | 0.023 |

Part Curves Page 2 of 3

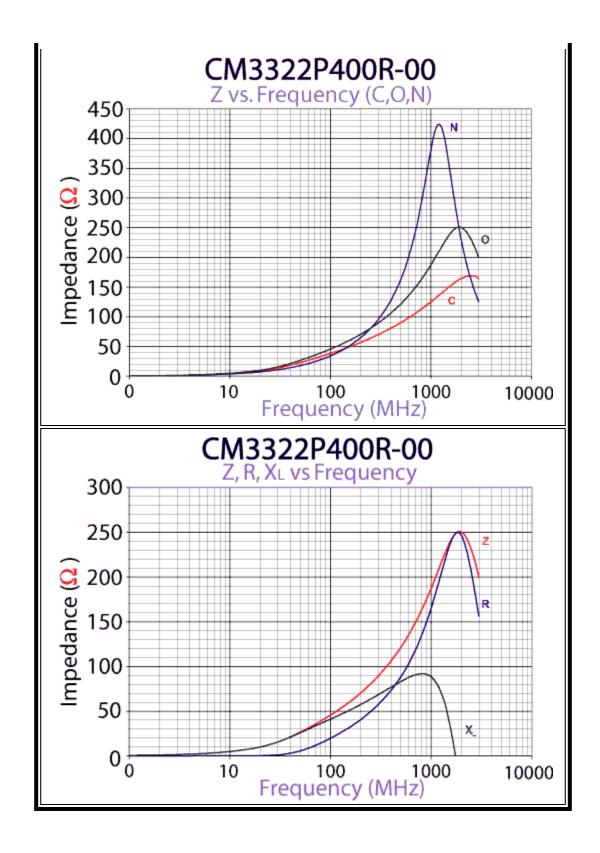

Part Curves Page 3 of 3

Specifications, which provide more details for the correct use of the described products, are available upon request. All specifications are subject to change without notice. For more information on any of the products listed above, please contact Steward customer service department at (800) 634-2673.

americas@steward.com

mexico@steward.com

europe@steward.com

asia@stew

Copyright© 2004 Steward, Inc.

Last Updated: 2/24/2004