

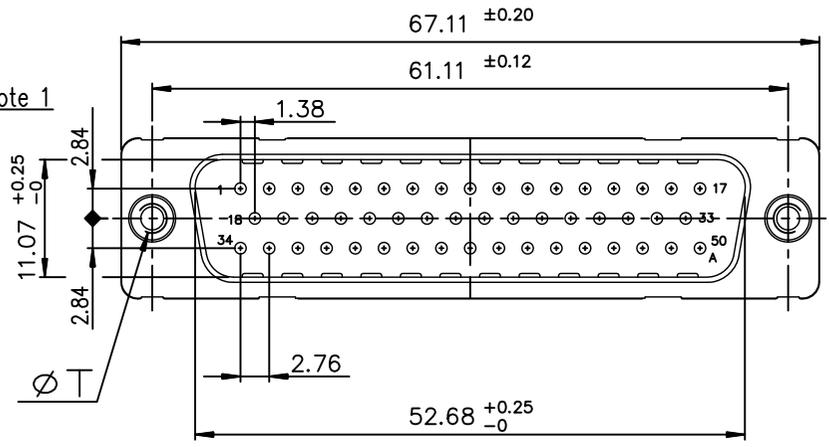


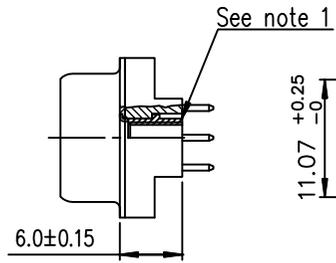


FCconnect.com

Copyright FCJ

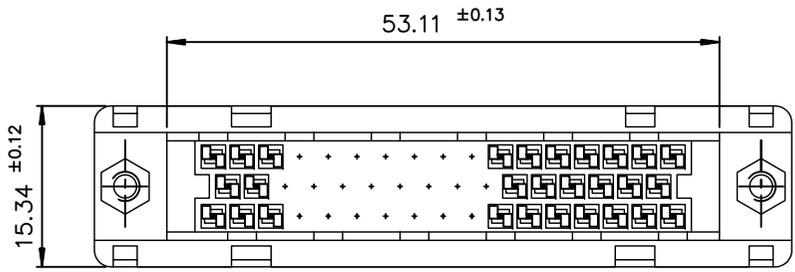

PC card drilling dimensions
(after plating – thickness: 1.60 mm) ±0.10

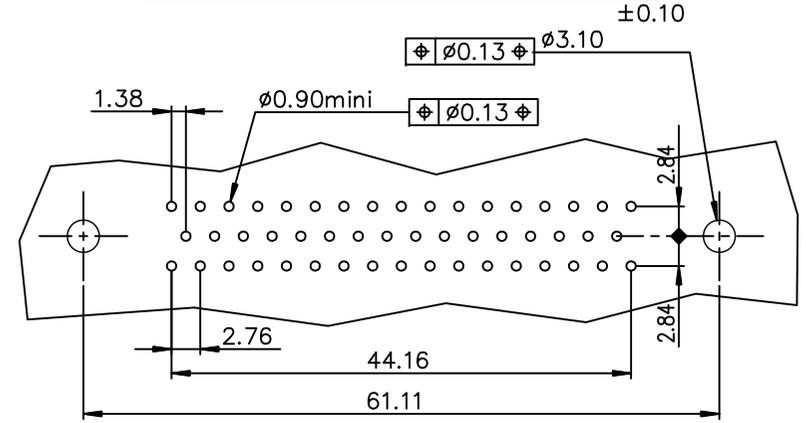

Plating: 4 --> flash AU
Plating: 6 --> 0.76µ AU

Part number: D50P24A*P*00LF

X--> ØT = UNC 4-40
L--> ØT = M3

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

Notes:

1) The nut can protrude above the surface of insulator but maintaining the footprint dimension 6.0±0.15 mm.

mat'l. code		-		surface		ISO 1302		tolerance		ISO 406		ISO 1101		projection		product family	
ltr		ecn no		dr		date		angles		linear		0.X±0.1		MM		D-SUB	
A		-		MPE		1997/10/29		-		-		0.XX±0.1		-		MALE DELTA-D 50 EUROPE	
B		LS07-0281		MPE		2007/11/06		-		-		0.XXX±0.1		-		STRAIGHT SOLDER WITH NUT	
C		ELX-I-15331		AB		2013/07/24		0.XX±2'		-		-		scale 2:1		-	
D		ELX-I-21256		AB		2015/07/14		dr		PEESSON		1997/10/27		-		dwg no	
-		-		-		-		enrg		ALIAS.BABU		2013/07/24		-		sheet 1 of 1	
-		-		-		-		chr		MITHUN.PAUL		2013/07/24		-		size	
-		-		-		-		appd		BIJU.K.PAUL		2013/07/24		-		A3	
sheet		revision		D		-		-		-		-		-		type	
index		sheet		1		-		-		-		-		-		CUSTOMER Drawing	