

SUMMARY

Wires

Low	0
High	0
Coax	0
Triax	1
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	4M
Termination type	
IP rating	66
Cable Ø	0.00 - 0.00 mm
Matching parts	
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	RMA*: Straight coupler
Keying	Circular, plug has male contact(s)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	∅ 0 - 0 mm
Variant	

Performance

Configuration	4M.675 : 1 Triax (75 Ohm)
Insulator	
Rated Current	15 Amps

Specifications

Vtest: 1500 V (AC), 2120 V (DC)
Impedance: 75 Ohm


Others

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]
Salt Spray Corrosion: >144 hr
Climatical Category: 55/175/21
Shielding (min): 85 dB (10 MHz)
IP Rating: 66

DRAWINGS

Draws

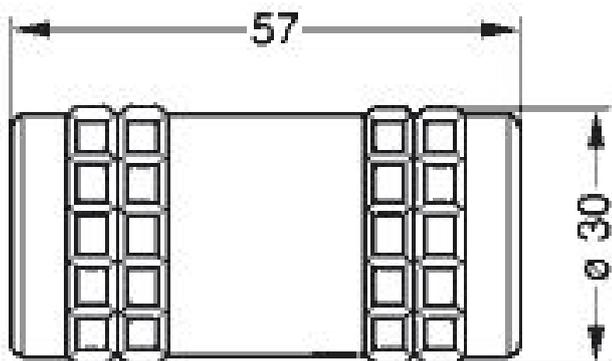

Dimensions

	A	L
mm.	30	57
in.	1,18	2,24

RECOMMENDED BY LEMO

Tools

None

Cables