

| THIS COPY IS PROVIDED ON A | A RESTRICTED BASIS AND IS NOT TO BE U | SED IN ANY V | WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP. |
|--|--|--------------|---|
| Material | High Conductivity Seamless Copper Tube | | |
| Plating | Electro-Tin | | .48 R Re |
| Wire Size | 8 AWG | | \checkmark |
| Wire Type | Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric | | E |
| Wire Strip Length | 5/8 in. | | 386 |
| Stud Size | 3/8 in. | .60±.04 | |
| UL Listed Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. | | PANDU N 8 STR CU LCA8-38 |
| UL Temperature Rating | 90°C | | .36±.0441±.02 DIA |
| C.S.A Certified Wire Connector | Yes | | 1.56±.06 |
| Panduit Color Code on Barrel | RED | | I |
| Panduit Die Index No. on Barrel | P21 | | Wire inspection window — |
| Alternate Industry Die Index No. () on Barrel | N/A | | wife hispection willdow |





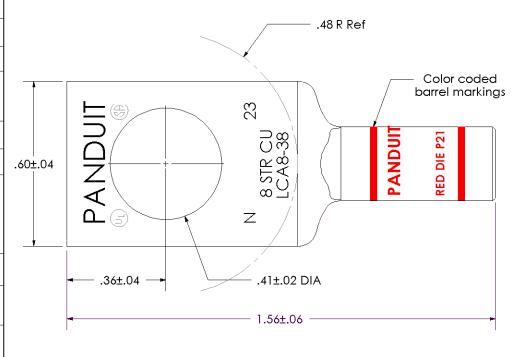

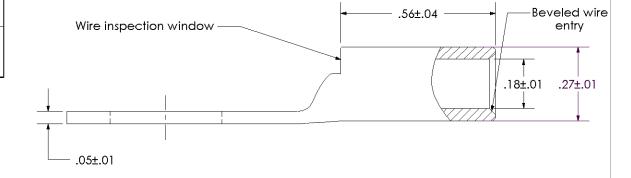

| | | | | | | PANDU | | EY PARK, ILLINOIS |
|-----|------|-----|-----|-------------|-------|--|-----------------------|-------------------|
| | | | | | | | LCA8-38-L | |
| 00 | 9/02 | SAB | DRL | RELEASED | 10318 | Copper Lug - One-Hole, Standard Barrel | | |
| REV | DATE | BY | снк | DESCRIPTION | ECN | SCALE N/A | DRAWING NO / CAD FILE | LCA8-38-CUST |