

**date** 05/13/2013

page 1 of 3

# MODEL: CMI-1240-SMT | DESCRIPTION: PIEZO BUZZER INDICATOR

#### **FEATURES**

- low current
- washable
- · internally driven






#### **SPECIFICATIONS**

parameter	conditions/description	min	typ	max	units
rated voltage			12		Vdc
operating voltage		3		20	Vdc
current consumption	at rated voltage			8	mA
rated frequency		3,500	4,000	4,500	Hz
sound pressure level	at 10 cm, rated voltage	83			dB
dimensions	16.9 x 16.9 x 7.8				mm
weight				2.6	g
material	PPS UL-94 V-0 (black)				
terminal	SMT type (Au plating)				
operating temperature		-30		70	°C
storage temperature		-40		80	°C
RoHS	yes				


Note: Add suffix "-TR" to the model for tape & reel packaging

## **SOLDERABILITY**

parameter	conditions/description	min	typ	max	units
reflow soldering	see reflow profile			260	°C




### **MECHANICAL DRAWING**

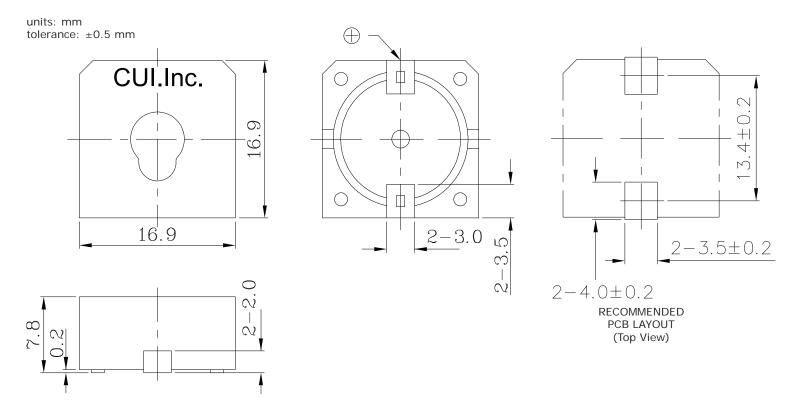

## **PERFORMANCE CURVES**

P: Voltage vs. Sound Pressure Level I: Voltage vs. Current Consumption

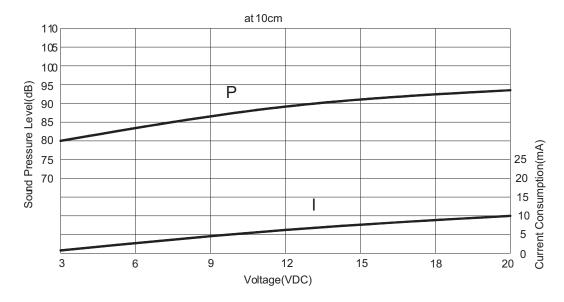

#### **REVISION HISTORY**

rev.	description	date	
1.0	initial release	06/03/2005	
1.01	updated part number, added TR package option, applied new spec template	05/13/2013	

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters 20050 SW 112th Ave. Tualatin, OR 97062 800.275.4899

Fax 503.612.2383 cui.com techsupport@cui.com

CUI offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.