
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

POSITION	LOAD @ "DETENT"	TOLERANCE		
1	9	+/- 3 LBS		
2	12	+/- 3 LBS		
3	14	+/- 3 LBS		
4	19	+/- 3 LBS		
5	22	+/- 4 LBS		
6	28	+/- 4 LBS		
7	32	+/- 4 LBS		
8	34	+/- 4 LBS		

ACCURACY OF <u>LOAD @ DETENT</u> DEPENDS UPON MATCHING THE INDICATOR LINE EXACTLY WITH THE DESIRED SETTING

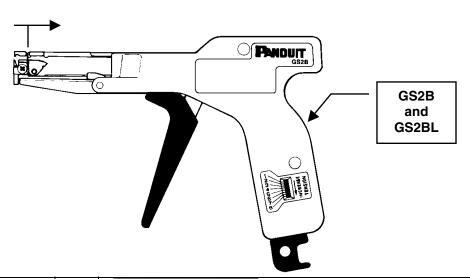

											ORP. TINLEY PARK, ILLINOI	s
									GS2B, GS2BL			
									TENSION ROD FORCE @ DETENT			
									UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: UNLESS OTHERWISE			_
									(.x) ±	(.xxx) ±	SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
02	1-03-06	BLR	ABJ	ADD: GS2BL	NONE		BKA		(.xx) ±	ANGLES ±		
01	6-03-03	BLR	ABJ	RENAME TO: TENSION ROD FORCE @ DETENT	NONE		DLWE		DRAWN BY: BLR	MATL:	SCALE NONE	
00	3-25-03	BLR	ABJ	RELEASED	NONE				DATE: 3-25-03		WB24706A01	DWG A SIZE
REV	DATE	ву	CHK'D	DESCRIPTION	ECN	-R	CUST	SUP	CHK'D: ABJ			