


IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	95 Ω	250 Ω	420 Ω
Minimum	- Ω	200 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

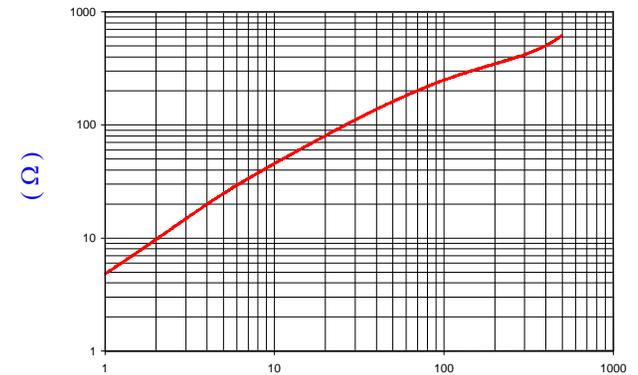

FREQUENCY (MHz)

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture, REF #3399

**UNCONTROLLED
DOCUMENT**

NOTES:

1. ASSEMBLED PART #: 28A2029-0A0
2. CASE COLOR: WHITE - "0A0"
3. CASE FLAMMABILITY RATING: UL94 V-2.
4. CORE DIMENSIONS REFER TO 28A2029-000 SPEC. FERRITE CORE DIMENSION IS FOR INTERNAL PURPOSE TO ENHANCE FITTING TO CASE AND ELECTRICAL CHARACTERISTICS ONLY.
5. COSMETIC SPECIFICATION REFER TO WI-QA-038.

CASE DIMENSIONS:

A	22.28 [.877]	±	1.00 [.039]
B	10.00 [.394]	±	1.00 [.039]
C	32.77 [1.290]	±	1.00 [.039]
D	21.84 [.860]	±	1.00 [.039]
E	4.30 [.170]	±	Ref.

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
REV	DESCRIPTION	DATE	INT				
X	UPDATE CASE DIMENSIONS REMOVE CORE DIM AND ADD NOTE 4&5	01/13/14	Jcai	28A2029-0A0		NTS	Ferrite
W	UPDATE CORE DIM C	07/06/12	Jcai	28A2029-0A0		NTS	Ferrite
V	UPDATE LOGO AND ADD NOTES 3	12/16/11	Jcai	28A2029-0A0		NTS	Ferrite
U	UPDATE 100MHz MINIMUM VALUE	07/17/07	TMB	28A2029-0A0		NTS	Ferrite
T	UPDATE COMPANY LOGO	04/18/07	TMB	28A2029-0A0		NTS	Ferrite
REV	DESCRIPTION	DATE	INT	28A2029-0A0-X		TOOL #	-



REV X PART TYPE: FERRITE SNAP-ON DRAWN BY: JAZ

SCALE: NTS MATERIAL: Ferrite