

preliminary


## Schottky Diode Gen 2

$V_{RRM}$  = 60V  
 $I_{FAV}$  = 2x 30A  
 $V_F$  = 0.75V


High Performance Schottky Diode  
Low Loss and Soft Recovery  
Common Cathode

Part number

DSA60C60HB

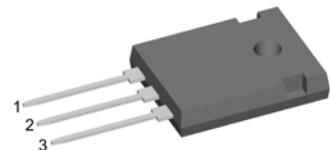

Backside: cathode

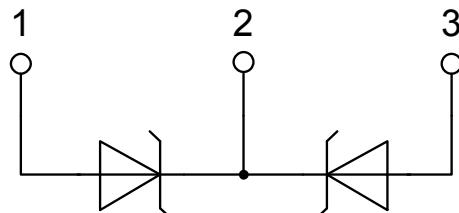

**Features / Advantages:**

- Very low  $V_F$
- Extremely low switching losses
- Low  $I_{rm}$  values
- Improved thermal behaviour
- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching

**Applications:**

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

**Package:** TO-247

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0


**Schottky**

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
$V_{RSM}$	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^\circ C$			60	V
$V_{RRM}$	max. repetitive reverse blocking voltage	$T_{VJ} = 25^\circ C$			60	V
$I_R$	reverse current, drain current	$V_R = 60 V$ $V_R = 60 V$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		450 5	$\mu A$ mA
$V_F$	forward voltage drop	$I_F = 30 A$ $I_F = 60 A$ $I_F = 30 A$ $I_F = 60 A$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		0.91 1.14 0.75 0.96	V V V V
$I_{FAV}$	average forward current	$T_C = 150^\circ C$ rectangular	$T_{VJ} = 175^\circ C$		30	A
$I_F = 0.5$						
$V_{F0}$ $r_F$	threshold voltage slope resistance } for power loss calculation only		$T_{VJ} = 175^\circ C$		0.49 6.2	V $m\Omega$
$R_{thJC}$	thermal resistance junction to case				0.95	K/W
$R_{thCH}$	thermal resistance case to heatsink			0.25		K/W
$P_{tot}$	total power dissipation	$T_C = 25^\circ C$			160	W
$I_{FSM}$	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}; V_R = 0 V$	$T_{VJ} = 45^\circ C$		550	A
$C_J$	junction capacitance	$V_R = 12 V$ f = 1 MHz	$T_{VJ} = 25^\circ C$	449		pF

## Package TO-247

Symbol	Definition	Conditions	min.	typ.	max.	Unit
$I_{RMS}$	RMS current	per terminal <sup>1)</sup>			50	A
$T_{VJ}$	virtual junction temperature		-55		175	°C
$T_{op}$	operation temperature		-55		150	°C
$T_{stg}$	storage temperature		-55		150	°C
Weight				6		g
$M_D$	mounting torque		0.8		1.2	Nm
$F_c$	mounting force with clip		20		120	N

## Product Marking

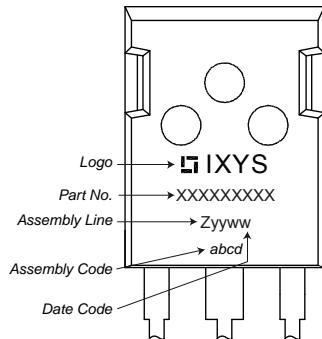

## Part number


D = Diode  
 S = Schottky Diode  
 A = low VF  
 60 = Current Rating [A]  
 C = Common Cathode  
 60 = Reverse Voltage [V]  
 HB = TO-247AD (3)

Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DSA60C60HB	DSA60C60HB	Tube	30	506722


Similar Part	Package	Voltage class
DSA60C60PB	TO-220AB (3)	60

## Equivalent Circuits for Simulation

<sup>\*</sup> on die level $T_{VJ} = 175 \text{ }^{\circ}\text{C}$ 

	Schottky
$V_{0\max}$	threshold voltage
$R_{0\max}$	slope resistance *

## Outlines TO-247

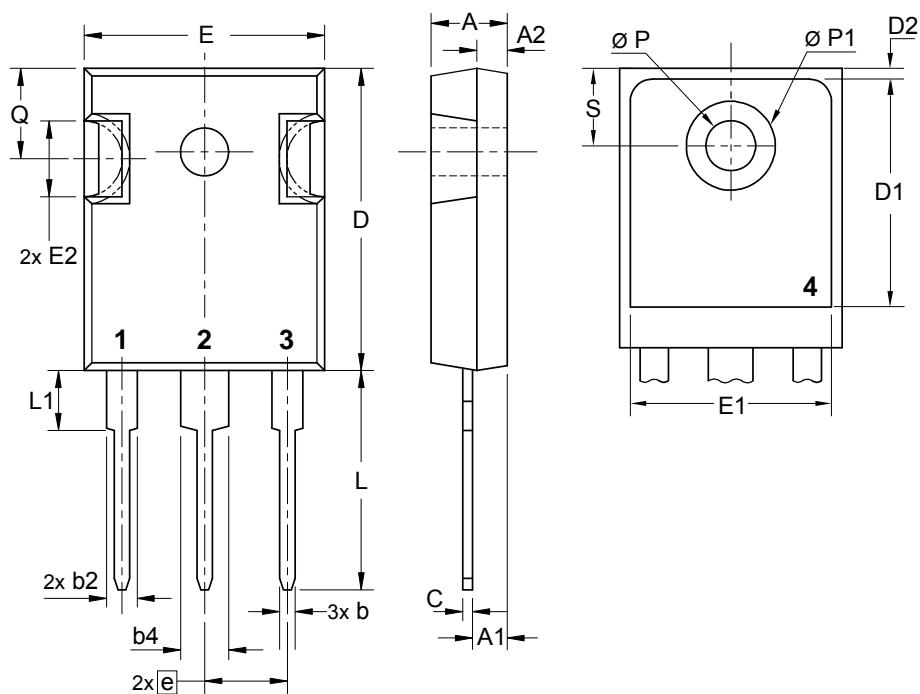

Sym.	Inches min. max.	Millimeter min. max.
A	0.185 0.209	4.70 5.30
A1	0.087 0.102	2.21 2.59
A2	0.059 0.098	1.50 2.49
D	0.819 0.845	20.79 21.45
E	0.610 0.640	15.48 16.24
E2	0.170 0.216	4.31 5.48
e	0.215 BSC	5.46 BSC
L	0.780 0.800	19.80 20.30
L1	- 0.177	- 4.49
ØP	0.140 0.144	3.55 3.65
Q	0.212 0.244	5.38 6.19
S	0.242 BSC	6.14 BSC
b	0.039 0.055	0.99 1.40
b2	0.065 0.094	1.65 2.39
b4	0.102 0.135	2.59 3.43
c	0.015 0.035	0.38 0.89
D1	0.515 -	13.07 -
D2	0.020 0.053	0.51 1.35
E1	0.530 -	13.45 -
ØP1	- 0.29	- 7.39

