
# S.FL2 SERIES SUPER FL TYPE 2 COAXIAL CONNECTOR

#### OUTLINE

S.FL2 (Super FL Type 2 Coaxial Connector) Series is a Surface Mount, Low Profile, Miniature Coaxial Connector intended for high density packaging.

Compared to HIROSE's FL series connectors, the S.FL2

Series offers a 50% reduced profile when assembled, achieving increased density of internal wiring for high frequency transmission applications.

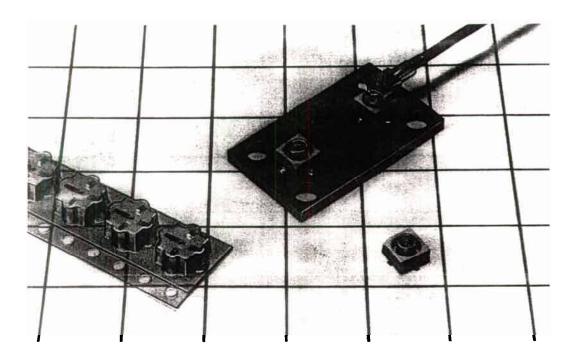

### **■ LEADING FEATURES**

- (1) Surface mounting type.
- (2) Low profile, up to 4.7mm from the printed circuit board surface when assembled.
- (3) Highly flexible Offers high frequency performance below V.S.W.R 1.2 over 0-2000MHz range.
- (4) Cable to be used:
- JUNFRON Coaxial Cable A1280456-A (JUN-KO SHA make)
- 0.7D-2W
- (5) Extraction jig permits easy extraction of connector.
- (6) Designed for application for automatic packaging. Embossment taping type is added to standard items.

# APPLICATIONS

Pocket telephone, Car telephone, radio communications equipment, electronic measuring instruments, GPS, etc.


# MATERIAL AND FINISH

Parts Name	Material	Finish
Shell	Phosphor bronze	Silver plating
Male center contact	Phosphor bronze	Gold plating
Female center contact	Phosphor bronze	Gold plating
Insulator	Polyphenylene oxide and polyphenylene sulfide	

## ■ PERFORMANCE

Item	Standard	
Characteristic impedance	50 Ω	
Insulation resistance	500MΩ and above at DC250V	
Contact resistance	20m Ω and under for the center, 10m Ω and under for outer contact at DC10A	
Withstand voltage	1 min at AC250V (r.m.s.)	
Mating force (Extraction force)	300gf~2kgf	
Life of contact	50 times	
Standing wave voltage ratio	1.2 and under up to 2000MHz DC	

## DIMENSIONS

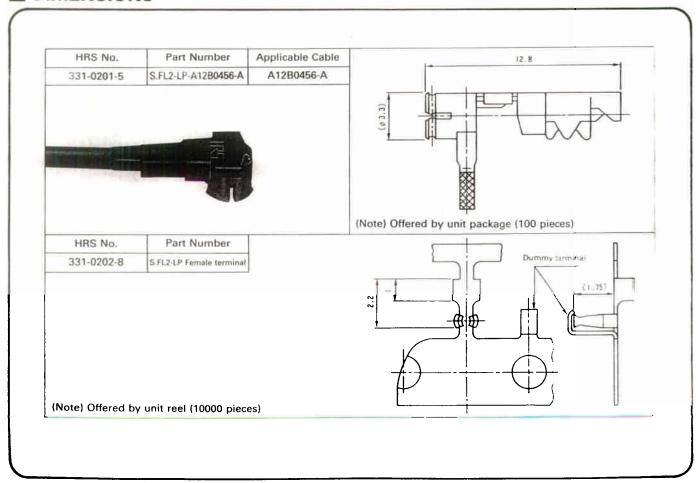

## **■ RECEPTACLE**

