

**ZWS100BAF/A****SPECIFICATIONS**

A249-01-01/A-A

ITEMS		MODEL		ZWS100BAF -3/A	ZWS100BAF -5/A	ZWS100BAF -12/A	ZWS100BAF -15/A	ZWS100BAF -24/A	ZWS100BAF -48/A
1	Nominal Output Voltage	V		3.3	5	12	15	24	48
2	Maximum Output Current	A		20	20	8.5	6.7	4.3	2.1
3	Maximum Output Power	W		66.0	100.0	102.0	100.5	103.2	100.8
4	Efficiency (Typ) (*1)	100VAC	%	82	84	86	86	87	88
		200VAC	%	84	86	88	88	89	90
5	Input Voltage Range (*2)	-		85 - 265VAC (47 - 63Hz) or 120 - 370VDC					
6	Input Current (Typ) (*1)	A	0.9/0.45	1.3/0.65					
7	Inrush Current (Typ) (*1)(*3)	-		14A at 100VAC, 28A at 200VAC, Ta=25°C, Cold Start					
8	PFHC	-		Designed to meet IEC61000-3-2					
9	Power Factor (Typ) (*1)	-	0.96/0.89	0.98/0.93					
10	Output Voltage Range	V	2.97 - 3.63	4.5 - 5.5	10.8 - 13.2	13.5 - 16.5	21.6 - 26.4	39.5 - 52.8	
11	Maximum Ripple & Noise (*4)	0≤Ta≤70°C	mV	120	120	150	150	150	200
		-10≤Ta<0°C	mV	160	160	180	180	180	240
12	Maximum Line Regulation (*4)(*5)	mV	20	20	48	60	96	192	
13	Maximum Load Regulation (*4)(*6)	mV	40	40	96	120	150	240	
14	Temperature Coefficient (*4)	-		Less than 0.02% / °C					
15	Over Current Protection (*7)	A	21.0 -	21.0 -	8.93 -	7.04 -	4.52 -	2.21 -	
16	Over Voltage Protection (*8)	V	3.79 - 4.95	5.75 - 7.00	13.8 - 16.2	17.3 - 20.3	27.6 - 32.4	55.2 - 64.8	
17	Hold-up Time (Typ) (*1)	-		20ms					
18	Leakage Current (*9)	-		Less than 0.5mA. 0.2mA(Typ) at 100VAC / 0.4mA(Typ) at 230VAC					
19	Parallel Operation	-		-					
20	Series Operation	-		Possible					
21	Operating Temperature (*10)	-		Convection : -10 - +60°C (-10 - +40°C:100%, +50°C:75%, +60°C:50%)					
22	Operating Humidity	-		30 - 90%RH (No Condensing)					
23	Storage Temperature	-		-30 - +75°C					
24	Storage Humidity	-		10 - 90%RH (No Condensing)					
25	Cooling	-		Convection Cooling					
26	Withstand Voltage	-		Input - FG : 2kVAC (10mA), Input - Output : 3kVAC (10mA) Output - FG : 500VAC (20mA) for 1min					
27	Isolation Resistance	-		More than 100MΩ at 25°C and 70%RH Output - FG : 500VDC					
28	Vibration	-		At no operating, 10 - 55Hz (Sweep for 1min) 19.6m/s² Constant, X,Y,Z 1hour each.					
29	Shock	-		Less than 196.1m/s²					
30	Safety	-		Approved by UL60950-1, CSA60950-1, EN60950-1, EN50178(OV II), Designed to meet DENAN at 100VAC only.					
31	Conducted Emission	-		Designed to meet EN55011/EN55022-B, FCC-B, VCCI-B					
32	Radiated Emission	-		Designed to meet EN55011/EN55022-B, FCC-B, VCCI-B					
33	Immunity	-		Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11					
34	Weight (Typ)	g		470					
35	Size (W x H x D)	mm		72 x 45 x 185 ( Refer to Outline Drawing )					

\*Read instruction manual carefully, before using the power supply unit.

=NOTES=

\*1. At 100VAC/200VAC, Ta=25°C, nominal output voltage and maximum output power.

\*2. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC(50/60Hz).

\*3. Not applicable for the in-rush current to Noise Filter for less than 0.2ms.

\*4. Please refer to Fig. A for measurement of Vo, line &amp; load regulation and ripple voltage.

\*5. 85 - 265VAC, constant load.

\*6. No load-Full load, constant input voltage.

\*7. 3.3, 5V model: Constant current limit and hiccup with automatic recovery.

12 - 48V model: Constant current limit with automatic recovery.

Avoid to operate at over load or short circuit condition for more than 30seconds.

\*8. OVP circuit will shut down output, manual reset (Re power on).

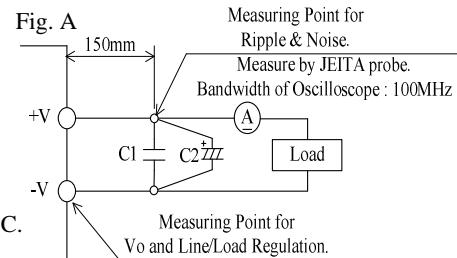
\*9. Measured by the each measuring method of UL, CSA, EN and DENAN(at 60Hz), Ta=25°C.

\*10. Output Derating

- Derating at standard mounting. Refer to output derating curve(A249-01-02/A-\_-).

- When forced air cooling, refer to output derating curve(A249-01-03/A-\_-).

- Load (%) is percent of maximum output power or maximum output current, whichever is greater.



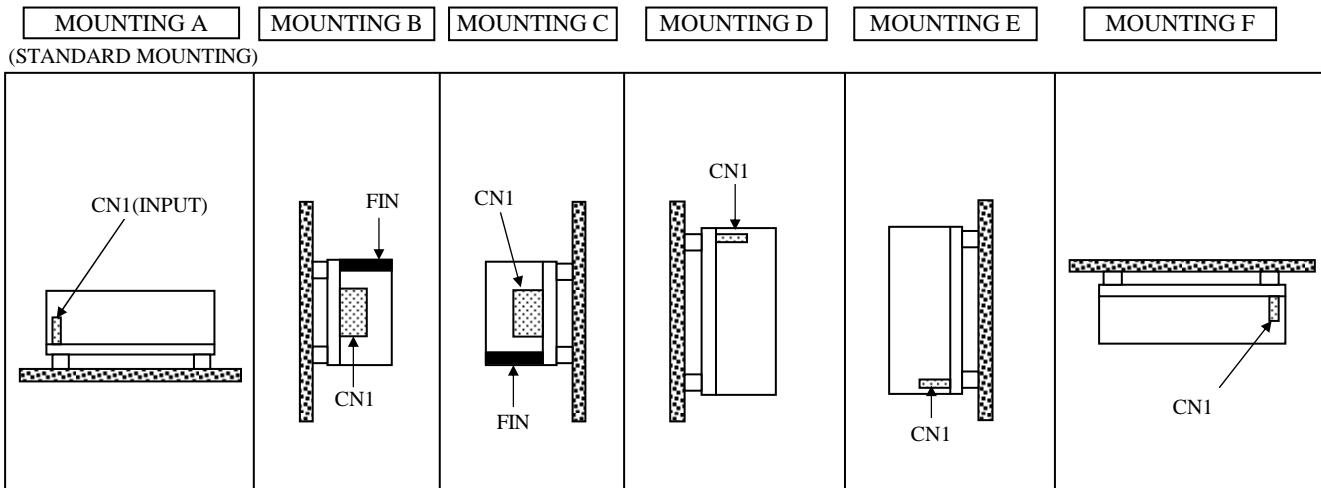
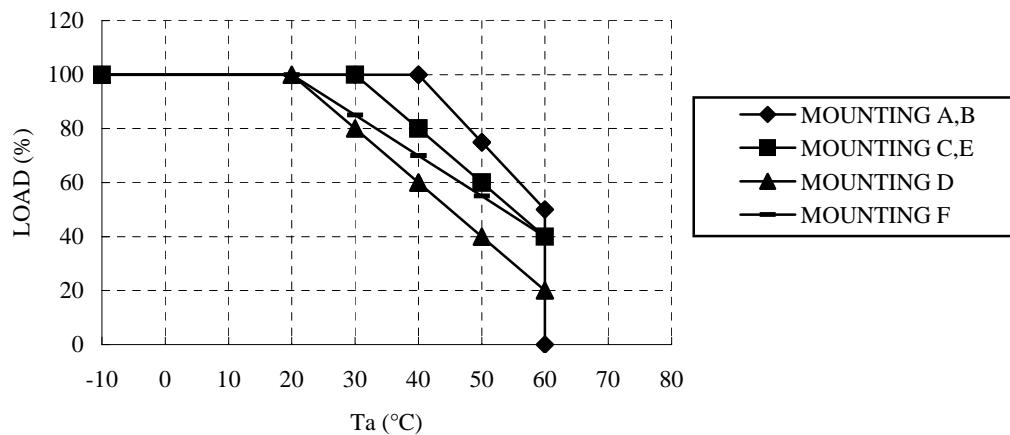
C1 : Film Cap. 0.1 μF  
C2 : Elect. Cap. 100 μF

**ZWS100BAF/A****OUTPUT DERATING**

A249-01-02/A

\*COOLING : CONVECTION COOLING

Ta (°C)	LOAD (%)	LOAD (%)	LOAD (%)	LOAD (%)
	MOUNTING A,B	MOUNTING C,E	MOUNTING D	MOUNTING F
-10 - +20	100	100	100	100
30	100	100	80	85
40	100	80	60	70
50	75	60	40	55
60	50	40	20	40

**OUTPUT DERATING CURVE**

**ZWS100BAF/A****OUTPUT DERATING**

A249-01-03/A

**\*COOLING : FORCED AIR COOLING**

Ta (°C)	LOAD (%)
	MOUNTING A-F
-10 - +50	100
60	70

Air velocity  $\geq 0.7\text{m/s}$  : Air must flow through component side.**OUTPUT DERATING CURVE**