




## Super Junction MOSFET

- Ultra Low  $R_{DS(ON)}$
- Low Miller Capacitance
- Ultra Low Gate Charge,  $Q_g$
- Avalanche Energy Rated
- Extreme  $dV/dt$  Rated
- Dual die (parallel)
- Popular T-MAX Package



Unless stated otherwise, Microsemi discrete MOSFETs contain a single MOSFET die. This device is made with two parallel MOSFET die. It is intended for switch-mode operation. It is not suitable for linear mode operation.

### MAXIMUM RATINGS

All Ratings per die:  $T_C = 25^\circ\text{C}$  unless otherwise specified.

Symbol	Parameter	APT106N60B2C6	UNIT
$V_{DSS}$	Drain-Source Voltage	600	Volts
$I_D$	Continuous Drain Current @ $T_C = 25^\circ\text{C}$ <sup>①</sup>	106	Amps
	Continuous Drain Current @ $T_C = 100^\circ\text{C}$	68	
$I_{DM}$	Pulsed Drain Current <sup>②</sup>	318	
$V_{GS}$	Gate-Source Voltage Continuous	$\pm 20$	Volts
$P_D$	Total Power Dissipation @ $T_C = 25^\circ\text{C}$	833	Watts
$T_J, T_{STG}$	Operating and Storage Junction Temperature Range	-55 - to 150	$^\circ\text{C}$
$T_L$	Lead Temperature: 0.063" from Case for 10 Sec.	260	
$I_{AR}$	Avalanche Current <sup>②</sup>	18.6	Amps
$E_{AR}$	Repetitive Avalanche Energy <sup>③</sup> ( $I_d = 18.6\text{A}$ , $V_{dd} = 50\text{V}$ )	3.4	
$E_{AS}$	Single Pulse Avalanche Energy ( $I_d = 18.6\text{A}$ , $V_{dd} = 50\text{V}$ )	2200	mJ

### STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
$BV_{(DSS)}$	Drain-Source Breakdown Voltage ( $V_{GS} = 0\text{V}$ , $I_D = 500\mu\text{A}$ )	600			Volts
$R_{DS(on)}$	Drain-Source On-State Resistance <sup>④</sup> ( $V_{GS} = 10\text{V}$ , $I_D = 53\text{A}$ )			0.035	Ohms
$I_{DSS}$	Zero Gate Voltage Drain Current ( $V_{DS} = 600\text{V}$ , $V_{GS} = 0\text{V}$ )			50	$\mu\text{A}$
	Zero Gate Voltage Drain Current ( $V_{DS} = 600\text{V}$ , $V_{GS} = 0\text{V}$ , $T_C = 150^\circ\text{C}$ )			500	
$I_{GSS}$	Gate-Source Leakage Current ( $V_{GS} = \pm 20\text{V}$ , $V_{DS} = 0\text{V}$ )			$\pm 200$	nA
$V_{GS(th)}$	Gate Threshold Voltage ( $V_{DS} = V_{GS}$ , $I_D = 3.4\text{mA}$ )	2.5	3	3.5	Volts

CAUTION: These Devices are Sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

"COOLMOS™ comprise a new family of transistors developed by Infineon Technologies AG. "COOLMOS" is a trademark of Infineon Technologies AG."

[Microsemi Website - http://www.microsemi.com](http://www.microsemi.com)

## DYNAMIC CHARACTERISTICS

APT106N60B2C6

Symbol	Characteristic	Test Conditions	MIN	TYP	MAX	UNIT
$C_{iss}$	Input Capacitance	$V_{GS} = 0V$ $V_{DS} = 25V$ $f = 1\text{ MHz}$		8390		pF
$C_{oss}$	Output Capacitance			7115		
$C_{rss}$	Reverse Transfer Capacitance			229		
$Q_g$	Total Gate Charge <sup>⑤</sup>	$V_{GS} = 10V$ $V_{DD} = 300V$ $I_D = 106A @ 25^\circ C$		308		nC
$Q_{gs}$	Gate-Source Charge			50		
$Q_{gd}$	Gate-Drain ("Miller") Charge			160		
$t_{d(on)}$	Turn-on Delay Time			25		
$t_r$	Rise Time	$V_{GS} = 15V$ $V_{DD} = 400V$ $I_D = 106A @ 25^\circ C$ $R_G = 4.3\Omega$		79		ns
$t_{d(off)}$	Turn-off Delay Time			277		
$t_f$	Fall Time			164		
$E_{on}$	Turn-on Switching Energy <sup>⑥</sup>	$INDUCTIVE SWITCHING @ 25^\circ C$ $V_{DD} = 400V, V_{GS} = 15V$ $I_D = 106A, R_G = 4.3\Omega$		2995		\mu J
$E_{off}$	Turn-off Switching Energy			3775		
$E_{on}$	Turn-on Switching Energy <sup>⑥</sup>			4055		
$E_{off}$	Turn-off Switching Energy			4200		

## SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
$I_S$	Continuous Source Current (Body Diode)			92	Amps
$I_{SM}$	Pulsed Source Current <sup>②</sup> (Body Diode)			318	
$V_{SD}$	Diode Forward Voltage <sup>④</sup> ( $V_{GS} = 0V, I_S = -106A$ )			0.9	Volts
$\frac{dV}{dt}$	Peak Diode Recovery $\frac{dV}{dt}$ <sup>⑦</sup>			15	
$t_{rr}$	Reverse Recovery Time ( $I_S = -106A, \frac{dI}{dt} = 100A/\mu s$ )	$T_J = 25^\circ C$	1400		ns
$Q_{rr}$	Reverse Recovery Charge ( $I_S = -106A, \frac{dI}{dt} = 100A/\mu s$ )	$T_J = 25^\circ C$	45		
$I_{RRM}$	Peak Recovery Current ( $I_S = -106A, \frac{dI}{dt} = 100A/\mu s$ )	$T_J = 25^\circ C$	47		Amps

## THERMAL CHARACTERISTICS

Symbol	Characteristic	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction to Case			0.15	°C/W
$R_{\theta JA}$	Junction to Ambient			40	

1 Continuous current limited by package lead temperature.

4 Pulse Test: Pulse width < 380 μs, Duty Cycle < 2%

2 Repetitive Rating: Pulse width limited by maximum junction temperature

5 See MIL-STD-750 Method 3471

3 Repetitive avalanche causes additional power losses that can be calculated as

6 Eon includes diode reverse recovery.

$P_{AV} = E_{AR} * f$ . Pulse width tp limited by  $T_J$  max.

7 Maximum 125°C diode commutation speed =  $di/dt$  600A/μs

Microsemi reserves the right to change, without notice, the specifications and information contained herein.

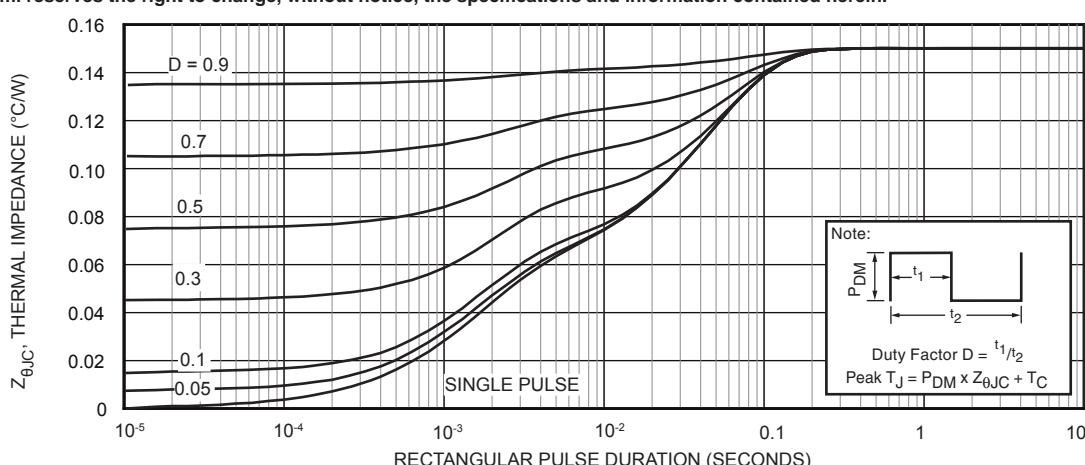


Figure 1, Maximum Effective Transient Thermal Impedance, Junction-To-Case vs Pulse Duration

## Typical Performance Curves

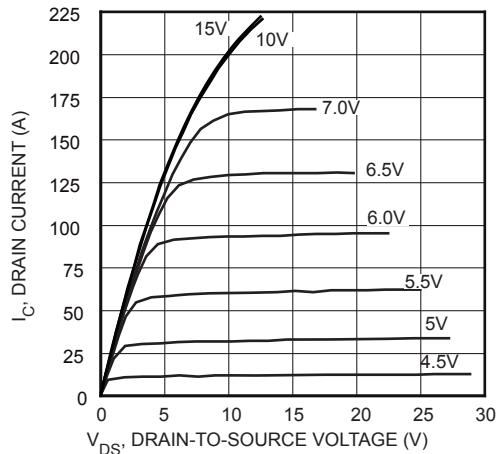


FIGURE 2, Low Voltage Output Characteristics

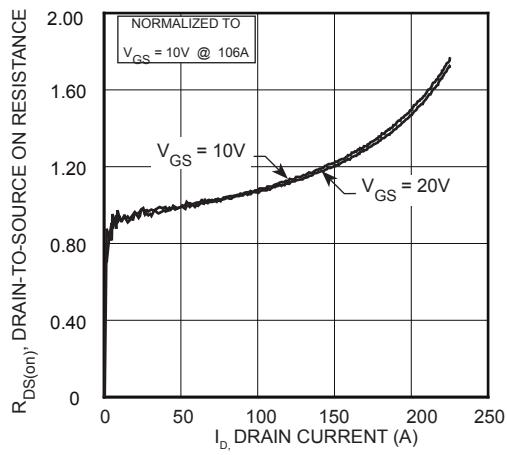


FIGURE 4,  $R_{DS(ON)}$  vs Drain Current

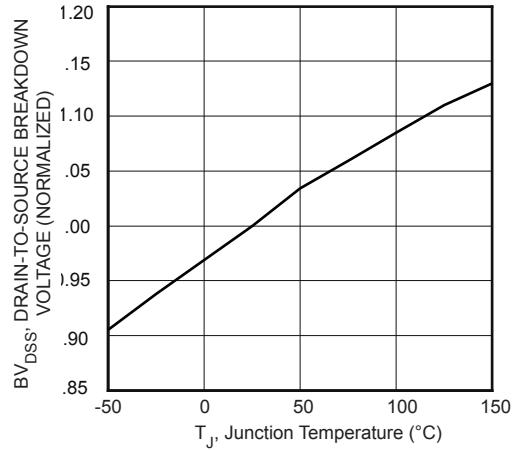


FIGURE 6, Breakdown Voltage vs Temperature

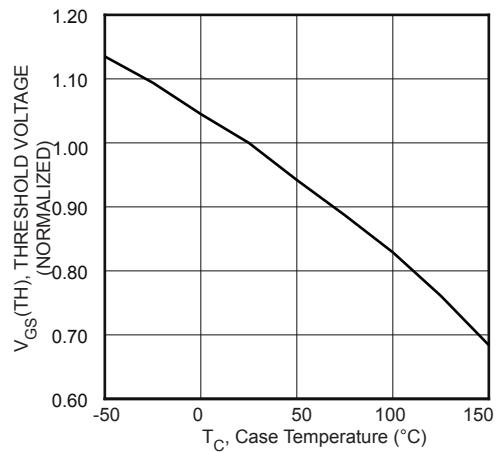


FIGURE 8, Threshold Voltage vs Temperature

APT106N60B2C6

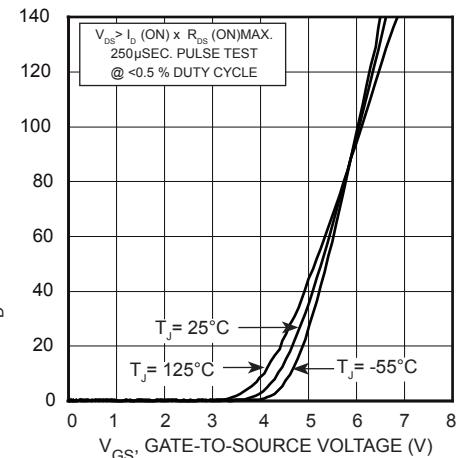


FIGURE 3, Transfer Characteristics

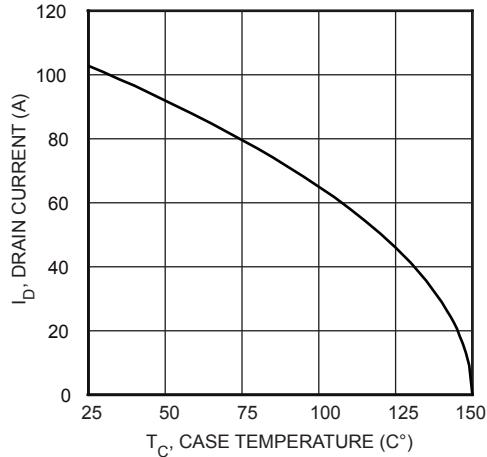


FIGURE 5, Maximum Drain Current vs Case Temperature

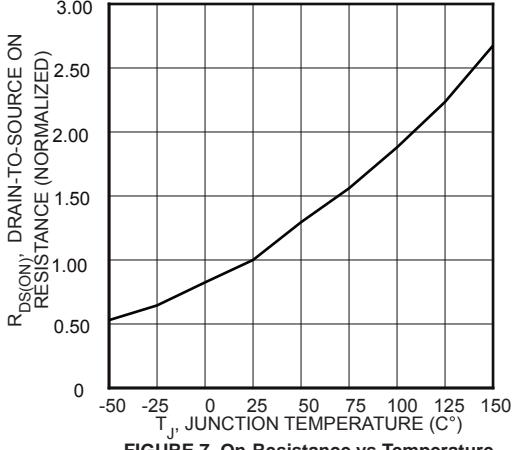


FIGURE 7, On-Resistance vs Temperature

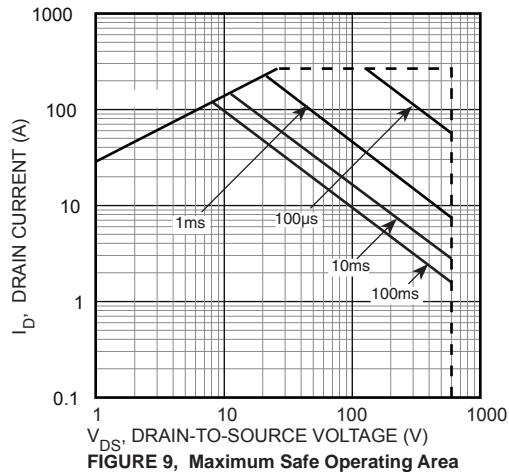


FIGURE 9, Maximum Safe Operating Area

## Typical Performance Curves

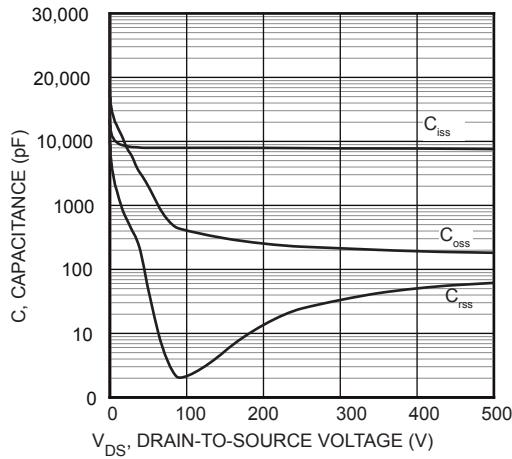


FIGURE 10, Capacitance vs Drain-To-Source Voltage

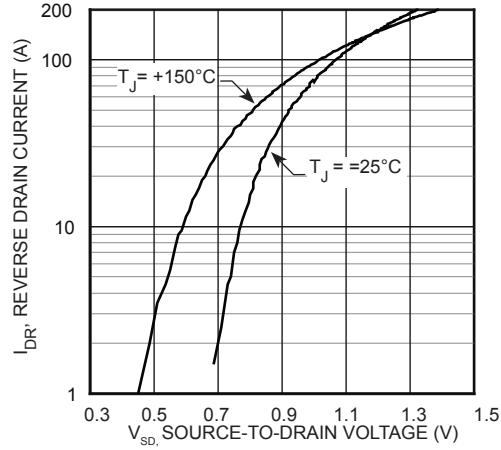


FIGURE 12, Source-Drain Diode Forward Voltage

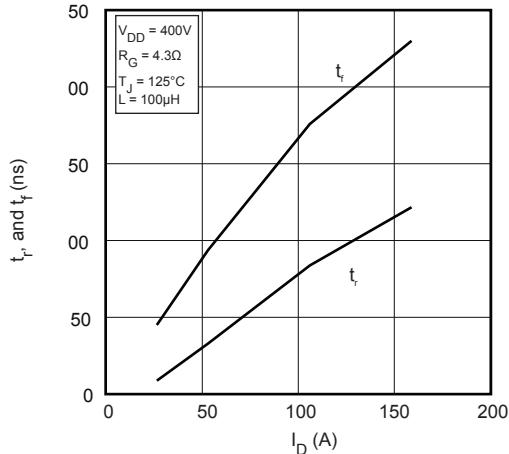


FIGURE 14 , Rise and Fall Times vs Current

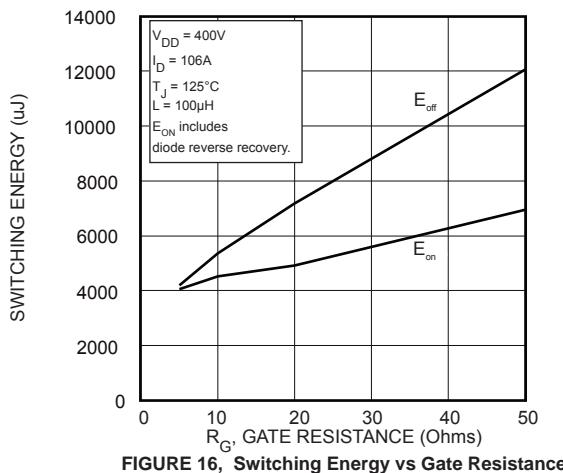


FIGURE 16, Switching Energy vs Gate Resistance

## APT106N60B2C6

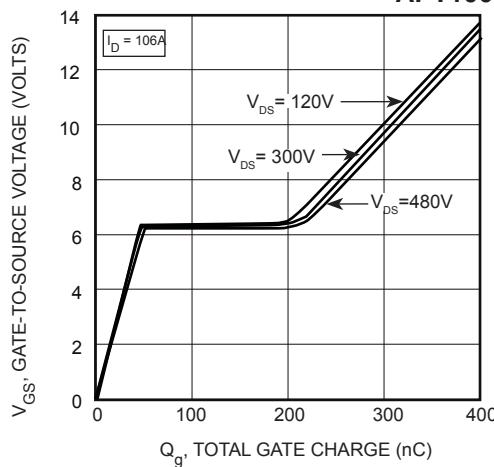


FIGURE 11, Gate Charges vs Gate-To-Source Voltage

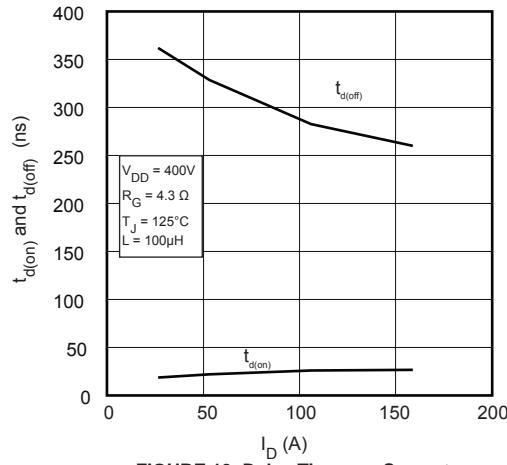


FIGURE 13, Delay Times vs Current

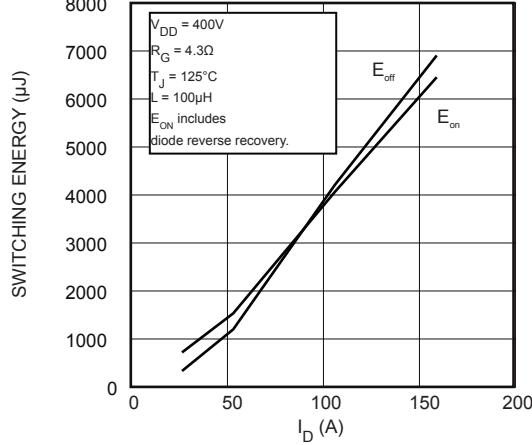


FIGURE 15, Switching Energy vs Current

## Typical Performance Curves

APT106N60B2C6

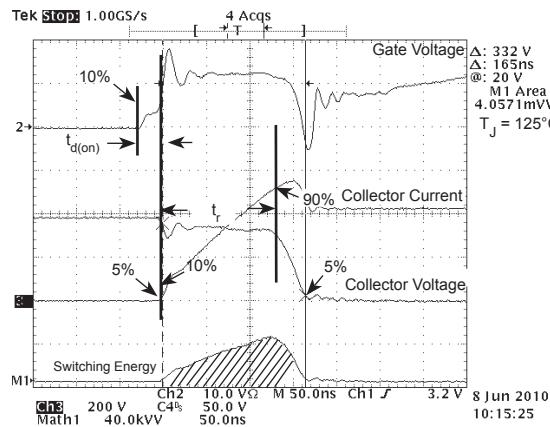


Figure 17, Turn-on Switching Waveforms and Definitions

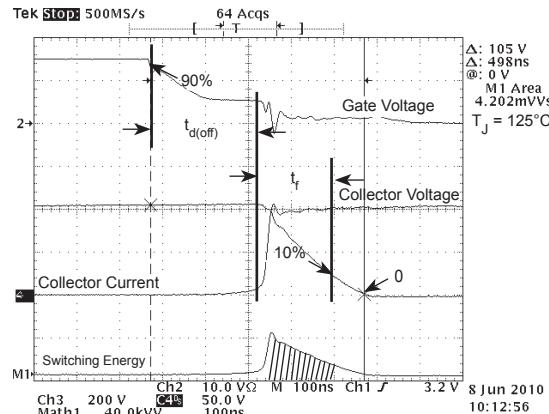


Figure 18, Turn-off Switching Waveforms and Definitions


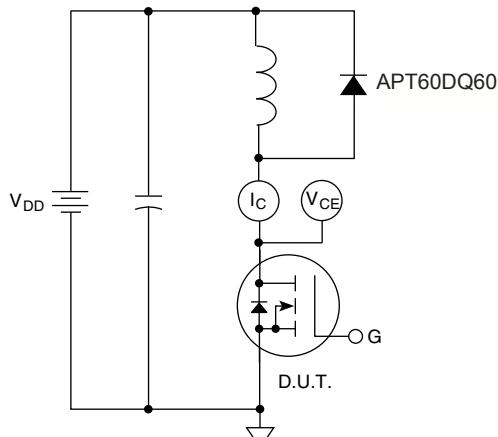


Figure 19, Inductive Switching Test Circuit

## T-MAX™ (B2) Package Outline

100% Sn Plated

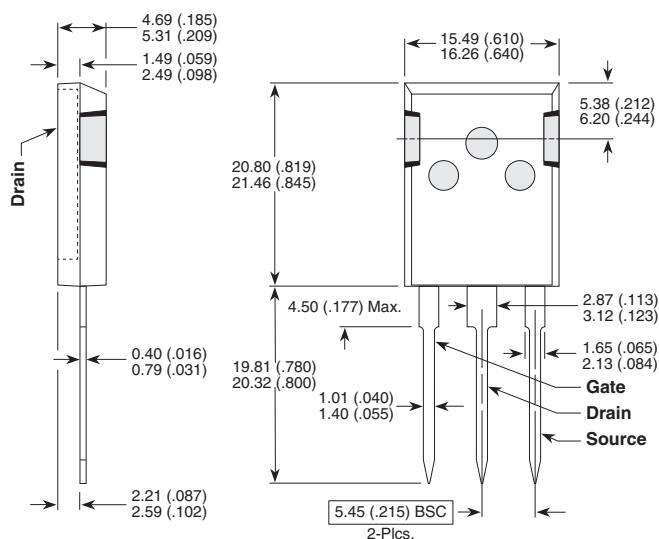

These dimensions are equal to the TO-247 without the mounting hole.

Dimensions in Millimeters and (Inches)

Microsemi's products are covered by one or more of U.S. patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 6,939,743, 7,352,045 5,283,201 5,801,417 5,648,283 7,196,634 6,664,594 7,157,886 6,939,743 7,342,262 and foreign patents. US and Foreign patents pending. All Rights Reserved.