



REVISIONS						
REV	ECO	DESCRIPTION	DATE	BY	APPR	
А3	-	RELEASE NEW DWG FORMAT	18/JUN/13	DRP	-	


RECEPTACLE, 3 PIN, ATM SERIES

ATM04-3P-XXX



20.7



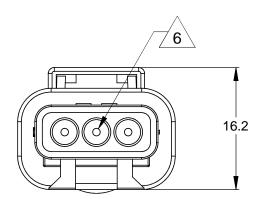




MATERIAL:


HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER

2. MODIFICATIONS: N/A


- 3. SPECIFICATIONS:
 - 3.1 CURRENT RATING: 7.5 AMPS
 - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
 - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
 - 3.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
 - 3.6 MATING CYCLE DURABILITY: 100 CYCLES
 - 3.7 RoHS COMPLIANT
- 4. MATING PART: ATM06-3S* PLUG (* = MODIFICATIONS AND COLORS)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.
- 6 CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL	
SIZE	O.D.	O.D.	WIRE RANGE	
20	1.35 mm (.053 in)	3.05 mm (.120 in)	16 - 22 AWG	

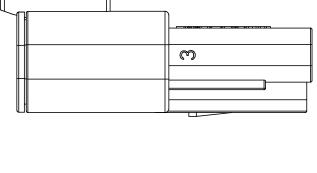

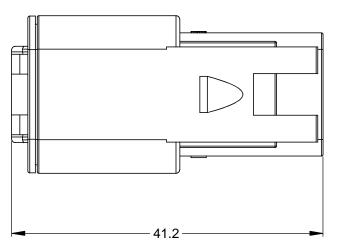

PART NUMBER CHART					
COLOR	PART NUMBER				
GREY	ATM04-3P				
BLACK	ATM04-3P-BLK				
BLUE	ATM04-3P-BLU				
BROWN	ATM04-3P-BRN				
GREEN	ATM04-3P-GRN				
RED	ATM04-3P-RED				
WHITE	ATM04-3P-WHT				
YELLOW	ATM04-3P-YEL				

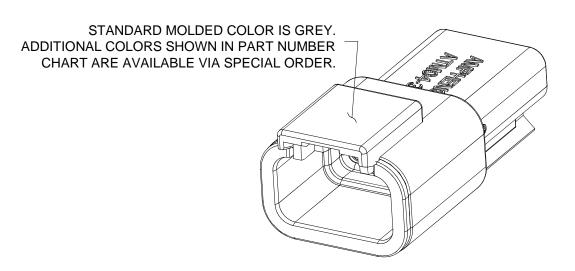

	SEE PART NUMBER CHART						
	PART NUMBER		DESCRIPTION			ITEM	
QUANTITY		MATERIALS LIST					
UNLESS OTHER	WISE SPECIFIED	SIGNATURE	S DATE		Λ	mphonol	
2) Tolerances are a		D.PARKS	18/JUN/13	- Amphenol			
2 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED:		Sine Systems - www.amphenol-sine.com			
3) Note reference = X MATERIAL SPECIFICATIONS: PROCESS SPECIFICATIONS: NEXT ASSY:		ENGINEER:		44724 Morley Drive			
		APPROVAL:				Clinton Township, MI 48036	
		CUSTOMER:		RECEPTACLE, 3 PIN, ATM SERIES			
		SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL		1			
				B	C-	ATM04-3P-XXX	A3
				SCALE: N	ONE	SHEET 1 OF	1