



# **Application & Main Feature**

Commercial Grade (Safety Standard Approved)

# **Series**

**CS** Series

### **Dimensions**

10.5mm Max. D

5.0mm Max.

7.5mm +/-1.5mm 0.6mm +/-0.05mm

5.0mm +/-1.0mm

## Temperature Characteristic

Z5U(+22,-56%)

#### Rated Voltage

440Vac

### Withstanding Voltage

2600Vac

### Capacitance

4.7nF

# Capacitance Tolerance

+/-20%

# Dissipation Factor

2.5% Max.

# Insulation Resistance


10000Mohm Min.


### AEC-Q200


Not Applicable

### Lead Length / Package Type

5mm for Bulk





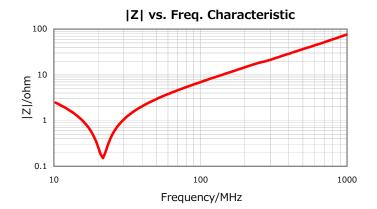

# **Temperature Characteristic**

