

SUMMARY

Wires

| | |
|---------|---|
| Low | 6 |
| High | 0 |
| Coax | 0 |
| Triax | 0 |
| Quad | 0 |
| Fiber | 0 |
| Fluidic | 0 |



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

| | |
|------------------|----------------|
| Series | C |
| Termination type | Male solder |
| IP rating | 50 |
| Cable Ø | 3.20 - 5.20 mm |
| Matching parts | CKB.M06.GLLG |
| Status | |
| Alternative part | |

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|--|
| Shell Style/Model | CA*: Straight plug with cable collet and nut for fitting a bend relief |
| Keying | 2 keys (gamma=60; Plug: male contacts; Receptacle: female contacts) |
| Housing Material | PSU (Polysulfone), gray |
| Cable Fixing | ∅ 3.2 - 5.2 mm |
| Variant | |

Performance

| | |
|---------------|--------------------|
| Configuration | CAB.M06 : 6 Low V. |
| Insulator | |
| Rated Current | 12 Amps |

Specifications

| | |
|---|------|
| Test voltage (kV rms) Contact-contact: | 1.35 |
| Air clearance min. (mm) or Creepage distance min. (mm): | 0.85 |


Others

| | |
|--------------|-------|
| F ret (min): | 150 N |
|--------------|-------|

F ret (max): 250 N
Steam sterilization: 20 times (with potting on rear connection)
IP Rating: 50

DRAWINGS

Draws

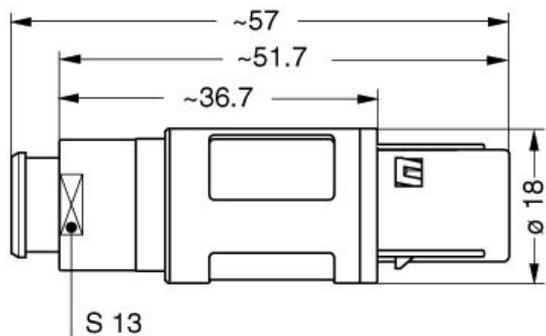

Dimensions

| | A | L |
|-----|------|------|
| mm. | 18 | 57 |
| in. | 0,71 | 2,24 |

RECOMMENDED BY LEMO

Tools

None

Cables