


# Industrial 10/100BASE-TX Ethernet Copper Extender

## EIS2-EXTEND



19-inch rack system with power supply

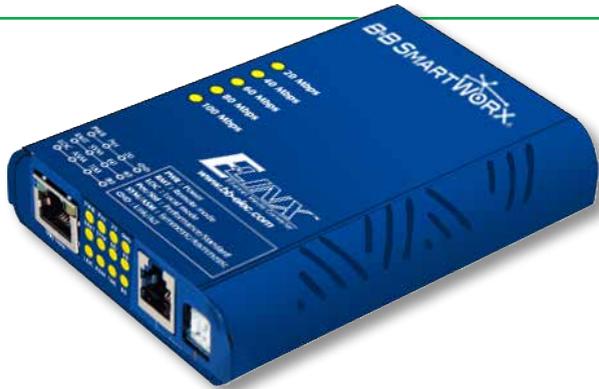

Optional, additional power supply

### PRODUCT FEATURES

- Extend Ethernet Copper up to 2200 meters (7218 feet) over existing copper wire (common copper, telephone, Cat5e)
- VDSL2 technology with transmission rate of 100Mbps at 400meters
- Auto -detection of Local/Remote function to reduce installation time
- Symmetric mode where downstream and upstream TX are important
- Asymmetric mode where single TX like CCTV requires larger BW
- Auto negotiation of speed and duplex mode on TX port
- Performance / Standard mode to adjust SNR according to line quality
- One 10/100Base TX (TX) Ethernet port with RJ-45 connector
- IEEE 802.3 10BaseT and IEEE 802.3u 100BaseTX compliant
- Line port uses common RJ-11 connector
- One DIP switch for configuring local or remote mode
- Status LEDs for speed, monitoring and connection status
- External AC to DC power adapter included
- Used as a stand-alone device or with a 19-inch rack chassis
- Hot-swappable when used in 19 inch rack chassis

### ORDERING INFORMATION

MODEL NUMBER	DESCRIPTION	POWER SUPPLY (INCLUDED)
EIS2-EXTEND	Industrial 10/100BASE-TX Ethernet Extender	USA

### ACCESSORIES

- EIS-PS-US - Replacement Power supply 12V US Plug
- EIS-PS-EU - Replacement Power supply 12V EU plug
- EIS-PS-UK - Replacement Power supply 12V UK plug
- EIS-RACK-PS - Power Supply For EIS-RACK-16, 84 Watts
- EIS-RACK-16 - Media Converter 19 Inch 2U Rack Chassis - 16 Slots
- C5UMB3FBG - 3 ft. (1 M) - Beige - Category 5e UTP Patch Cord

The model EIS2-EXTEND extends your copper Ethernet connections up to 2200 meters (7218 feet) over twisted pair wire. The Ethernet Extender fully complies with IEEE 802.3 10BaseT and IEEE 802.3u 100BaseTX standards. Two EIS2-EXTEND models are required for the Ethernet extension, (one at each end of your extension points). The EIS2-EXTEND's design features high shock, vibration, electrical noise immunity, a wide operating temperature range from -10C to 60C and ruggedized housing. The EIS2-EXTEND can be used with included power supply or in the EIS-RACK-16, 19-inch rack mount chassis used to house up to 16 EIS2-EXTEND units.

# Industrial 10/100BASE-TX Ethernet Copper Extender

EIS2-EXTEND



## SPECIFICATIONS

TECHNOLOGY	
Standards	IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX, IEEE802.3x
Protocols	Transparent to higher layer protocols
Processing Type	Half-duplex back-pressure and IEEE802.3x Full-duplex flow control
Forward and Filtering Rate	14,880pps for 10Mbps; 148,810pps for 100Mbps


INTERFACE	
Ethernet Port	Port: One RJ-45 port, 10/100BASE-TX Full/Half-duplex Auto-Negotiation, Auto-MDI/MDIX Speed: 10/100Mbps Distance: 100meters (328 ft.) Cable: 10BASE-T: UTP CAT. 3, 4, 5 (2-pair wire) 100BASE-TX: UTP CAT. 5 (4-pair wire)
Extender Port	Port: One RJ-11 Speed: 2/5/9/10/19/26/33/53/65/100Mbps Distance: 2200 meters (7,218 ft.) Cable: Telephone wire 24AWG (0.5mm diameter, 1-pair) or larger

DIP Switch	DIP Switch 1: AUTO / LOC DIP Switch 3: Perf. / Std. DIP Switch 2: SYM / ASM
LED Indicators	Per Unit: Power 1 Per 10/100TX Port: Link/Activity, full-duplex SYM: Symmetric mode ASM: Asymmetric mode RMT: Remote mode LOC: Local mode Per: On/Performance mode - Off/Standard mode

POWER	
Input Voltage	12 VDC
Power Consumption	4.56 W Max. 0.38A @ 12VDC

MECHANICAL	
Enclosure	Aluminum case
Dimensions	8.03W x 10.92D x 2.38H cm (3.16W x 4.30D x 0.94H in)
Weight	150g (0.33 lb.)
Installation	Desktop, DIN-Rail (Top hat type 35mm), wall mounting or 19 inch rack mount chassis system

## MECHANICAL DIAGRAM

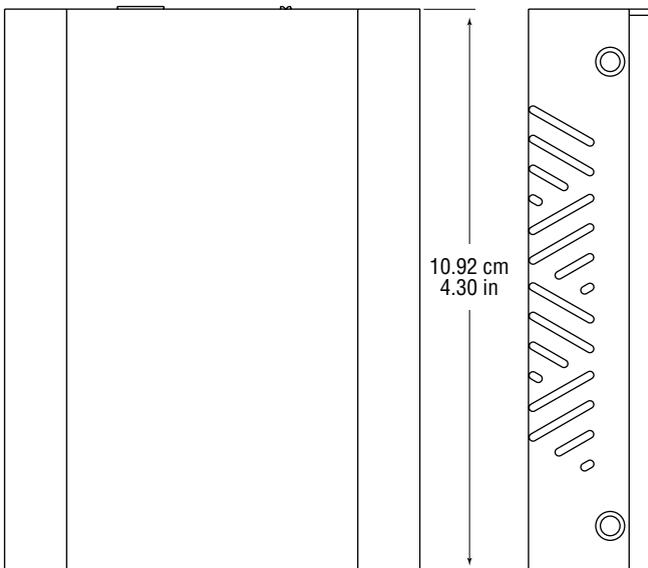

ENVIRONMENTAL	
Operating Temperature	-10°C to 60°C (14°F to 140°F)
Storage Temperature	-20°C to 70°C (-4 to 158°F)
Ambient Relative Humidity	5% to 95% (non-condensing)

REGULATORY APPROVALS	
ISO	Manufactured in an ISO9001 facility
Safety	UL60950-1 / EN60950-1 / IEC60950-1
EMI/EMS	CE FCC Part 15, Class A VCCI Class A EN55022 EN61000-3-2, -3-3, -4-3, -4-4, -4-5, -4-6, -4-8, -6-2, 6-3 IEC60068-2-6 Fc (Vibration Resistance) IEC60068-2-27 Ea (Shock)
Environmental	FED STD 101C Method 5007.1 (Free fall w/package)

## PERFORMANCE

MAXIMUM EXTENSION SPEED	MAXIMUM EXTENSION DISTANCE
100	400m (1312 ft)
65	600m (1969 ft)
53	800m (2625 ft)
33	1000m (3281 ft)
26	1200m (3937 ft)
19	1400m (4593 ft)
10	1600m (5249 ft)
9	1800m (5906 ft)
5	2000m (6562 ft)
2	2200 m (7218 ft)

Note: All speed selections are Symmetrical on the DSL and Full-duplex on the Ethernet

