


## THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

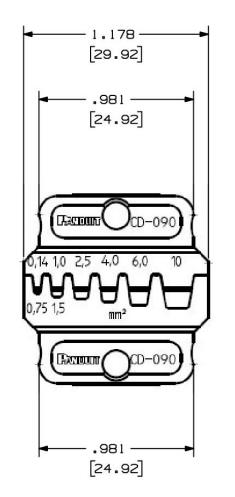

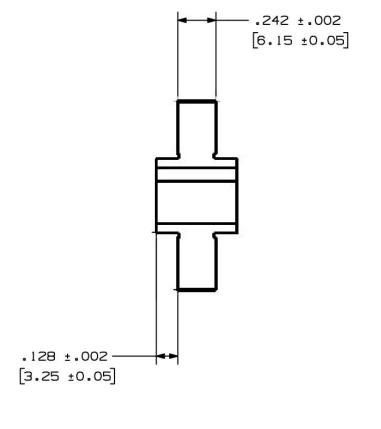

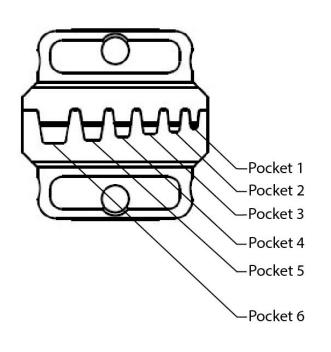

## NOTES, UNLESS OTHERWISE SPECIFIED:

 Interchangeable Crimp Die Inserts used with CT-2500CH Crimp Head frame and CT-2300 Micro Crimp Tool to crimp Panduit #26 - 10 AWG (0,14 – 6,0mm²) insulated and non-insulated single wire ferrules and #22 - 12 AWG (0,05 – 4,0mm²) insulated twin ferrules with a square profile

WEIGHT: 4.3 oz. [0.12] kg

DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

DIMENSIONS IN BRACKETS [MM] ARE METRIC.

CD-090		LISH GO GAGE	METRIC GO / NO GO GAGE	
CRIMP POCKET	MEMI	BERS	MEMBERS	
	"G" Dia. (GO)	"NG" Dia. (NO GO)	"G" Dia. (GO)	"NG" Dia. (NO GO)
1	0.018"	0.026"	0,45mm	0,65mm
2	0.035"	0.043"	0,90mm	1,10mm
3	0.051"	0.059"	1,30mm	1,50mm
4	0.071"	0.079"	1,80mm	2,00mm
5	0.093"	0.104"	2,35mm	2,55mm
6	0.110"	0.118"	2,80mm	3,00mm

File Location: Teamcenter

CROSS SECTION						
PROFILE	mm²					
1	0,14 – 0,75					
2	1,0 – 1,5					
3	2,5					
4	4,0					
5	6,0					
6	10,0					

	ı			T		1	
							CD-090 DIE SET
							CUSTOMER DRAWING
							TF28309B01_00
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
							(.x) ± (.xxx) ± (.xx) ±
00	11-22-16	BLR	BJPU	JADE	RELEASED	11042	THIRD ANGLE PROJECTION TF28309B01
REV	DATE	ВҮ	СНК	APR	DESCRIPTION	ECN	BY: 11-22-16 BJPU NONE SHT 1 OF 1 B