
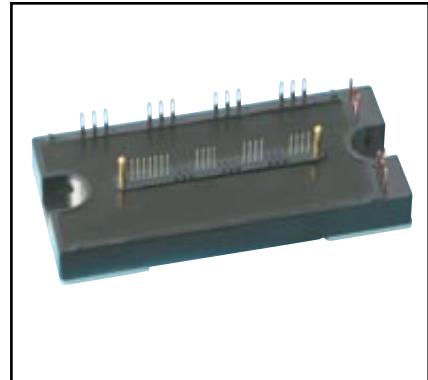


Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**Intellimod™ L-Series**  
**Three Phase**  
**IGBT Inverter + Brake**  
**50 Amperes/1200 Volts**

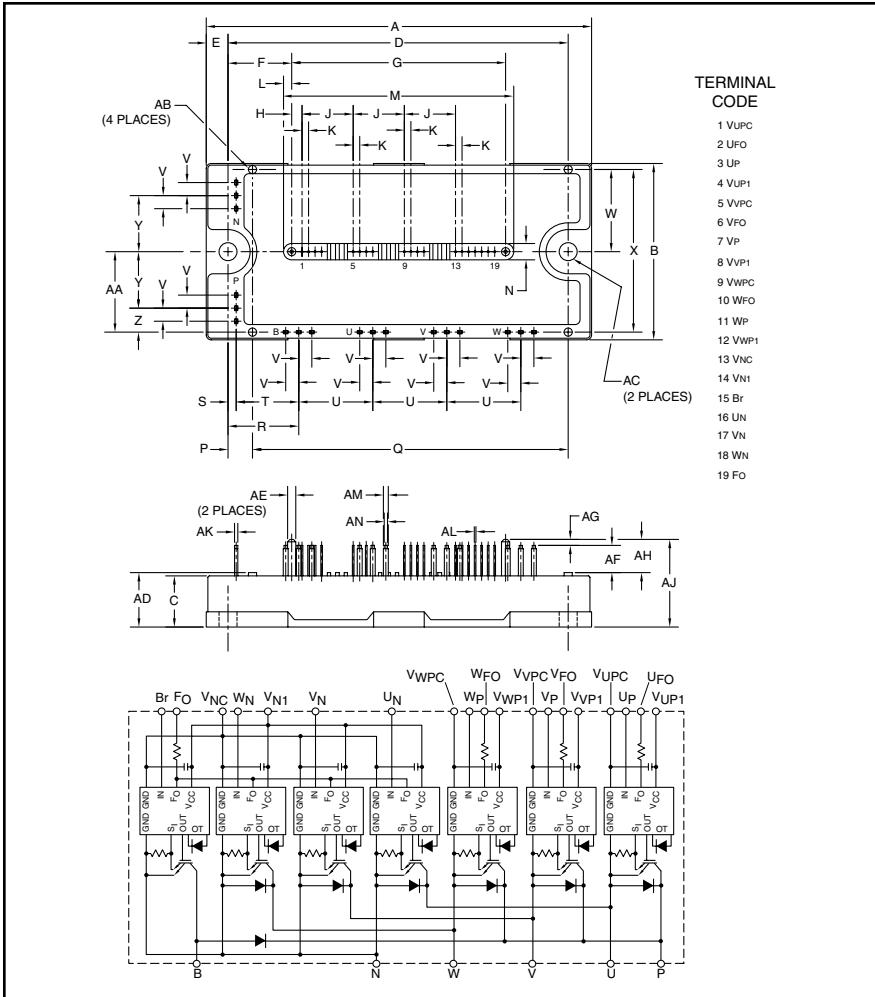

**Description:**

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

**Features:**

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
  - Short Circuit
  - Over Temperature Using On-chip Temperature Sensing
  - Under Voltage
- Low Loss Using 5th Generation IGBT Chip

**Applications:**

- Inverters
- UPS
- Motion/Servo Control
- Power Supplies

**Ordering Information:**

Example: Select the complete part number from the table below  
 -i.e. PM50RLB120 is a 1200V, 50 Ampere Intellimod™ Intelligent Power Module.

**Outline Drawing and Circuit Diagram**

Dimensions	Inches	Millimeters
A	4.72	120.0
B	2.17	55.0
C	0.63	16.0
D	4.17	106.0
E	0.28	7.0
F	0.78	19.75
G	2.62	66.5
H	0.13	3.25
J	0.63	16.0
K	0.08	2.0
L	0.10	2.5
M	2.81	71.5
N	0.20	5.0
P	0.31	7.75
Q	3.87	98.25
R	0.87	22.0
S	0.10	2.5
T	0.77	19.5
U	0.91	23.0

Dimensions	Inches	Millimeters
V	0.16	4.0
W	1.01	25.75
X	2.00	50.75
Y	0.69	17.5
Z	0.30	7.5
AA	0.98	25.0
AB	0.10 Dia.	Dia. 2.5
AC	0.22 Dia.	Dia. 5.5
AD	0.67	17.0
AE	0.10 Dia.	Dia. 2.5
AF	0.33	8.5
AG	0.08	2.0
AH	0.41	10.5
AJ	1.08	27.5
AK	0.04	1.0
AL	0.02 Sq.	Sq. 0.5
AM	0.06	1.5
AN	0.04	1.0

Type	Current Rating Amperes	V <sub>CES</sub> Volts (x 10)
PM	50	120



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM50RLB120**

**Intellimod™ L-Series**

**Three Phase IGBT Inverter + Brake**

**50 Amperes/1200 Volts**

**Absolute Maximum Ratings,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	PM50RLB120	Units
Power Device Junction Temperature	$T_j$	-20 to 150	°C
Storage Temperature	$T_{stg}$	-40 to 125	°C
Mounting Torque, M5 Mounting Screws	—	31	in-lb
Module Weight (Typical)	—	340	Grams
Supply Voltage, Surge (Applied between P - N)	$V_{CC(\text{surge})}$	1000	Volts
Self-protection Supply Voltage Limit (Short Circuit protection Capability)*	$V_{CC(\text{prot.})}$	800	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	$V_{ISO}$	2500	Volts

\*VD = 13.5 ~ 16.5V, Inverter Part,  $T_j = 125^\circ\text{C}$

**IGBT Inverter Sector**

Collector-Emitter Voltage ( $V_D = 15\text{V}$ , $V_{CIN} = 15\text{V}$ )	$V_{CES}$	1200	Volts
Collector Current ( $T_C = 25^\circ\text{C}$ )	$\pm I_C$	50	Amperes
Peak Collector Current ( $T_C = 25^\circ\text{C}$ )	$\pm I_{CP}$	100	Amperes
Collector Dissipation ( $T_C = 25^\circ\text{C}$ )	$P_C$	369	Watts

**IGBT Brake Sector**

Collector-Emitter Voltage ( $V_D = 15\text{V}$ , $V_{CIN} = 15\text{V}$ )	$V_{CES}$	1200	Volts
Collector Current ( $T_C = 25^\circ\text{C}$ )	$\pm I_C$	25	Amperes
Peak Collector Current ( $T_C = 25^\circ\text{C}$ )	$\pm I_{CP}$	50	Amperes
Collector Dissipation ( $T_C = 25^\circ\text{C}$ )	$P_C$	267	Watts
Diode Rated DC Reverse Voltage ( $T_C = 25^\circ\text{C}$ )	$V_{R(DC)}$	1200	Volts
Diode Forward Current	$I_F$	25	Amperes

**Control Sector**

Supply Voltage (Applied between $V_{UP1}-V_{UPC}$ , $V_{VP1}-V_{VPC}$ , $V_{WP1}-V_{WPC}$ , $V_{N1}-V_{NC}$ )	$V_D$	20	Volts
Input Voltage (Applied between $U_p-V_{UPC}$ , $V_p-V_{VPC}$ , $W_p-V_{WPC}$ , $U_N-V_N-W_N-B_r-V_{NC}$ )	$V_{CIN}$	20	Volts
Fault Output Supply Voltage	$V_{FO}$	20	Volts
(Applied between $U_{FO}-V_{UPC}$ , $V_{FO}-V_{VPC}$ , $W_{FO}-V_{WPC}$ , $F_O-V_{NC}$ )			
Fault Output Current ( $U_{FO}$ , $V_{FO}$ , $W_{FO}$ , $F_O$ Terminals)	$I_{FO}$	20	mA

**PM50RLB120**  
**Intellimod™ L-Series**  
**Three Phase IGBT Inverter + Brake**  
50 Amperes/1200 Volts


**Electrical and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>IGBT Inverter Sector</b>						
Collector-Emitter Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, V_D = 15V, T_j = 25^\circ\text{C}$	—	—	1.0	mA
		$V_{CE} = V_{CES}, V_D = 15V, T_j = 125^\circ\text{C}$	—	—	10	mA
Diode Forward Voltage	$V_{EC}$	$-I_C = 50\text{A}, V_{CIN} = 15\text{V}, V_D = 15\text{V}$	—	2.5	3.5	Volts
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 50\text{A}, T_j = 25^\circ\text{C}$	—	1.8	2.3	Volts
		$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 50\text{A}, T_j = 125^\circ\text{C}$	—	1.9	2.4	Volts
Inductive Load Switching Times	$t_{on}$		0.5	1.0	2.5	$\mu\text{s}$
	$t_{rf}$	$V_D = 15\text{V}, V_{CIN} = 0 \Leftrightarrow 15\text{V}$	—	0.5	0.8	$\mu\text{s}$
	$t_{C(on)}$	$V_{CC} = 600\text{V}, I_C = 50\text{A}$	—	0.4	1.0	$\mu\text{s}$
	$t_{off}$	$T_j = 125^\circ\text{C}$	—	2.0	3.0	$\mu\text{s}$
	$t_{C(off)}$		—	0.7	1.2	$\mu\text{s}$

**IGBT Brake Sector**

Collector-Emitter Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, V_D = 15\text{V}, T_j = 25^\circ\text{C}$	—	—	1.0	mA
		$V_{CE} = V_{CES}, V_D = 15\text{V}, T_j = 125^\circ\text{C}$	—	—	10	mA
Diode Forward Voltage	$V_{FM}$	$I_F = 25\text{A}$	—	2.5	3.5	Volts
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 25\text{A}, T_j = 25^\circ\text{C}$	—	1.8	2.3	Volts
		$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 25\text{A}, T_j = 125^\circ\text{C}$	—	1.9	2.4	Volts

$T_C$  (Base Plate) Measurement Point

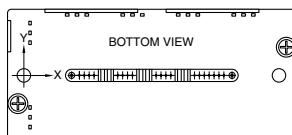

Arm Axis	UP		VP		WP		UN		VN		WN		Br	
	IGBT	FWDi	IGBT	FWDi										
X	28.3	28.4	65.0	64.9	86.9	86.9	39.3	39.2	54.0	54.1	76.0	76.1	17.9	19.3
Y	-7.7	1.5	-7.7	1.5	-7.7	1.5	5.7	-3.5	5.7	-3.5	5.7	-3.5	-10.5	4.3



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM50RLB120**

**Intellimod™ L-Series**

**Three Phase IGBT Inverter + Brake**

**50 Amperes/1200 Volts**

**Electrical and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>Control Sector</b>						
Short Circuit Trip Level ( $-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ , $V_D = 15\text{V}$ )	SC	Inverter Part Brake Part	100 50	— —	— —	Amperes
Short Circuit Current Delay Time	$t_{off}(\text{SC})$	$V_D = 15\text{V}$	—	0.2	—	$\mu\text{s}$
Over Temperature Protection (Detect $T_j$ of IGBT Chip)	OT <sub>R</sub>	Trip Level Reset Level	135 —	145 125	155 —	$^\circ\text{C}$
Supply Circuit Under-voltage Protection ( $-20 \leq T_j \leq 125^\circ\text{C}$ )	UV UV <sub>R</sub>	Trip Level Reset Level	11.5 —	12.0 12.5	12.5 —	Volts
Circuit Current	$I_D$	$V_D = 15\text{V}, V_{CIN} = 15\text{V}, V_{N1}-V_{NC}$ $V_D = 15\text{V}, V_{CIN} = 15\text{V}, V_{XP1}-V_{XPC}$	— —	20 5	30 10	mA
Input ON Threshold Voltage	$V_{th(on)}$	Applied between $U_P-V_{UPC}$ ,	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{th(off)}$	$V_P-V_{VPC}, W_P-V_{WPC}, U_N-V_N-W_N-\text{Br}-V_{NC}$	1.7	2.0	2.3	Volts
Fault Output Current*	$I_{FO(H)}$ $I_{FO(L)}$	$V_D = 15\text{V}, V_{CIN} = 15\text{V}$ $V_D = 15\text{V}, V_{CIN} = 15\text{V}$	— —	— 10	0.01 15	mA
Fault Output Pulse Width*	$t_{FO}$	$V_D = 15\text{V}$	1.0	1.8	—	ms

\*Fault output is given only when the internal SC, OT and UV protections schemes of either upper or lower devide operate to protect it.

**Thermal Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	IGBT (Per 1/6 Module)	—	—	0.26	$^\circ\text{C}/\text{Watt}$
Inverter Part	$R_{th(j-c)D}$	FWDi (Per 1/6 Module)	—	—	0.39	$^\circ\text{C}/\text{Watt}$
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	IGBT	—	—	0.36	$^\circ\text{C}/\text{Watt}$
Brake Part	$R_{th(j-c)D}$	FWDi	—	—	0.60	$^\circ\text{C}/\text{Watt}$
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module, Thermal Grease Applied	—	—	0.038	$^\circ\text{C}/\text{Watt}$

**Recommended Conditions for Use**

Characteristic	Symbol	Condition	Value	Units
Supply Voltage	$V_{CC}$	Applied across P-N Terminals	$\leq 800$	Volts
Control Supply Voltage**	$V_D$	Applied between $V_{UP1}-V_{UPC}$ , $V_{VP1}-V_{VPC}, V_{WP1}-V_{WPC}, V_{N1}-V_{NC}$	$15.0 \pm 1.5$	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between $U_P-V_{UPC}$ ,	$\leq 0.8$	Volts
Input OFF Voltage	$V_{CIN(off)}$	$V_P-V_{VPC}, W_P-V_{WPC}, U_N-V_N-W_N-\text{Br}-V_{NC}$	$\geq 9.0$	Volts
PWM Input Frequency	$f_{PWM}$	—	$\leq 20$	kHz
Arm Shoot-through Blocking Time	$t_{DEAD}$	Input Signal	$\geq 2.5$	$\mu\text{s}$

\*\* With ripple satisfying the following conditions:  $dv/dt$  swing  $\leq \pm 5\text{V}/\mu\text{s}$ , Variation  $\leq 2\text{V}$  peak to peak.

**PM50RLB120**  
**Intellimod™ L-Series**  
**Three Phase IGBT Inverter + Brake**  
50 Amperes/1200 Volts

