


Ceramic, 200C, HP, 1 uF, 10%, 200 V, X7R, Commercial, High Temperature, Lead Spacing = 12.7mm

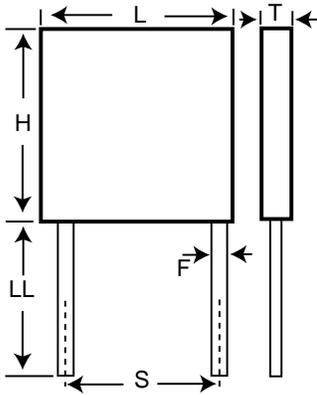

**Dimensions**

L	17.78mm MAX
H	10.16mm MAX
T	5.08mm MAX
S	12.7mm +/-0.76mm
LL	31.75mm MIN
F	0.635mm NOM

**Packaging Specifications**

<b>Packaging:</b>	Bulk
-------------------	------

**General Information**

<b>Style:</b>	Radial
<b>Series:</b>	HP
<b>Description:</b>	Commercial, High Temperature
<b>Features:</b>	Commercial
<b>RoHS:</b>	No
<b>Termination:</b>	Nickel

**Specifications**

<b>Capacitance:</b>	1 uF
<b>Capacitance Tolerance:</b>	10%
<b>Voltage DC:</b>	200 VDC
<b>Temperature Range:</b>	-55/+200C
<b>Temperature Coefficient:</b>	X7R