

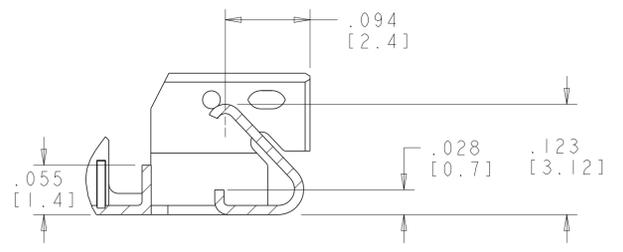
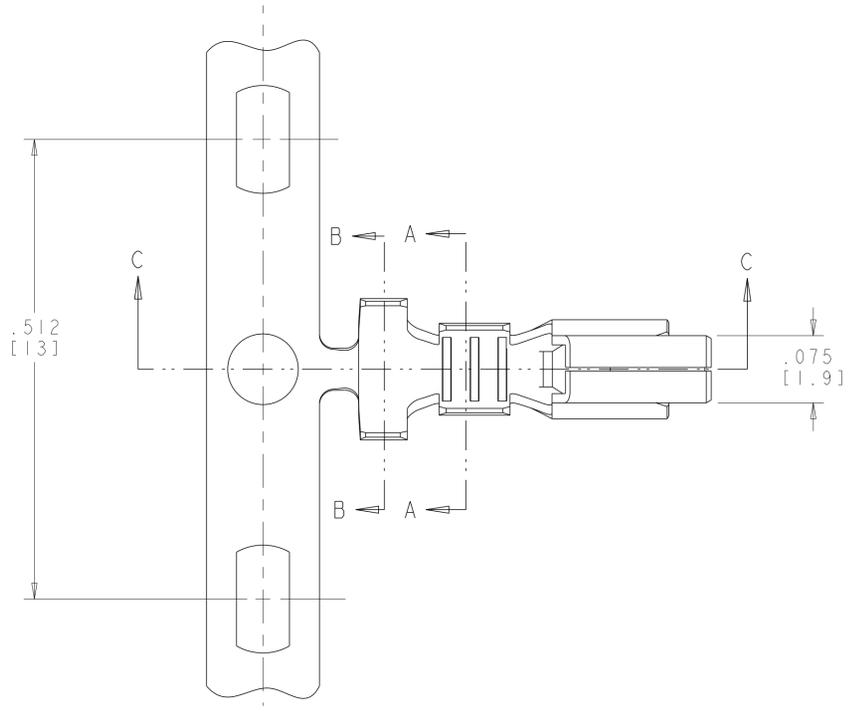
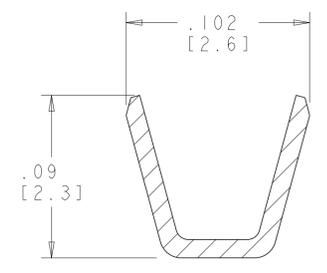
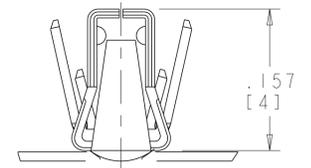


LOC	DIST	REVISIONS			
P	LTN	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER ECR-13-001644	31JAN2013	KH	TM

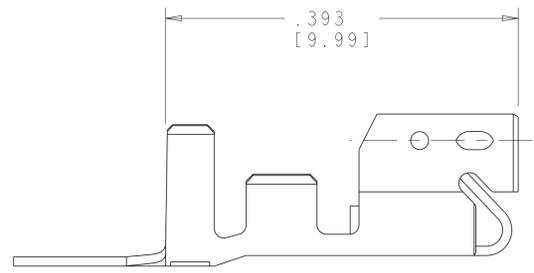


SECTION C-C


1. FINISH: 0.8μM PRE-TIN OVER 0.5μM MIN COPPER.
 2. WIRE RANGE: 22-18 AWG
- ⚠ CONTACTS COATED WITH TE ANTI-FRETTING LUBRICANT.

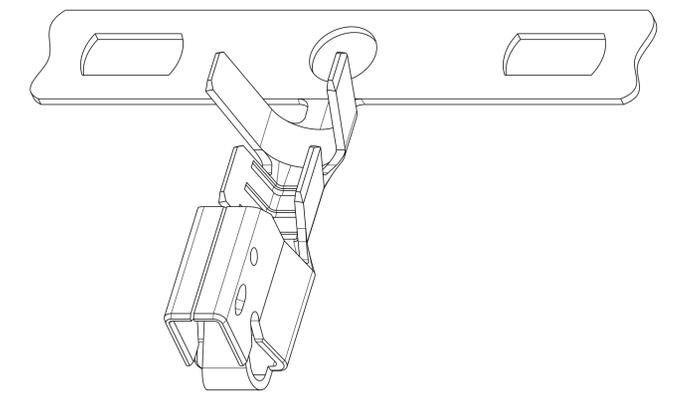

SECTION A-A
SCALE 20:1

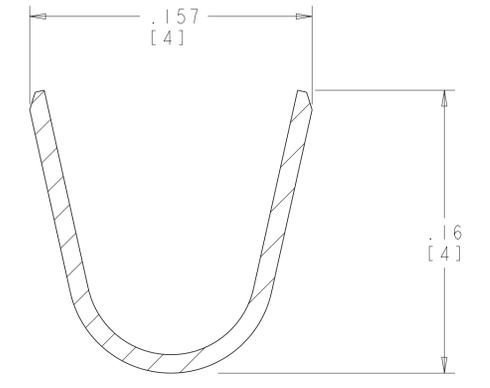

SECTION B-B
SCALE 20:1

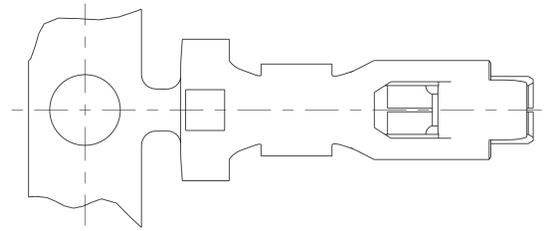

NONE	PHOS BRONZE	1744144-2
⚠	PHOS BRONZE	1744144-1
LUBRICANT	MATERIAL	PART NO

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES [MM]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN K. WHITAKER 05APR2005	CHK J. ELLIS 05APR2005	APVD J. ELLIS 05APR2005	NAME CONTACT, LANCELESS, STD, ECONOMY POWER II
0 PLC ±.01	1 PLC ±.01	PRODUCT SPEC	APPLICATION SPEC	SIZE A100779	RESTRICTED TO
2 PLC ±.01	3 PLC ±.015	FINISH	WEIGHT	CAGE CODE C=1744144	SCALE 10:1
4 PLC ±.01	ANGLES ±.1°	SEE TABLE	CUSTOMER DRAWING	SHEET 1 OF 1	REV D

TE Connectivity