


**Intellimod™ Module**  
**Three Phase**  
**IGBT Inverter Output**  
**50 Amperes/600 Volts**

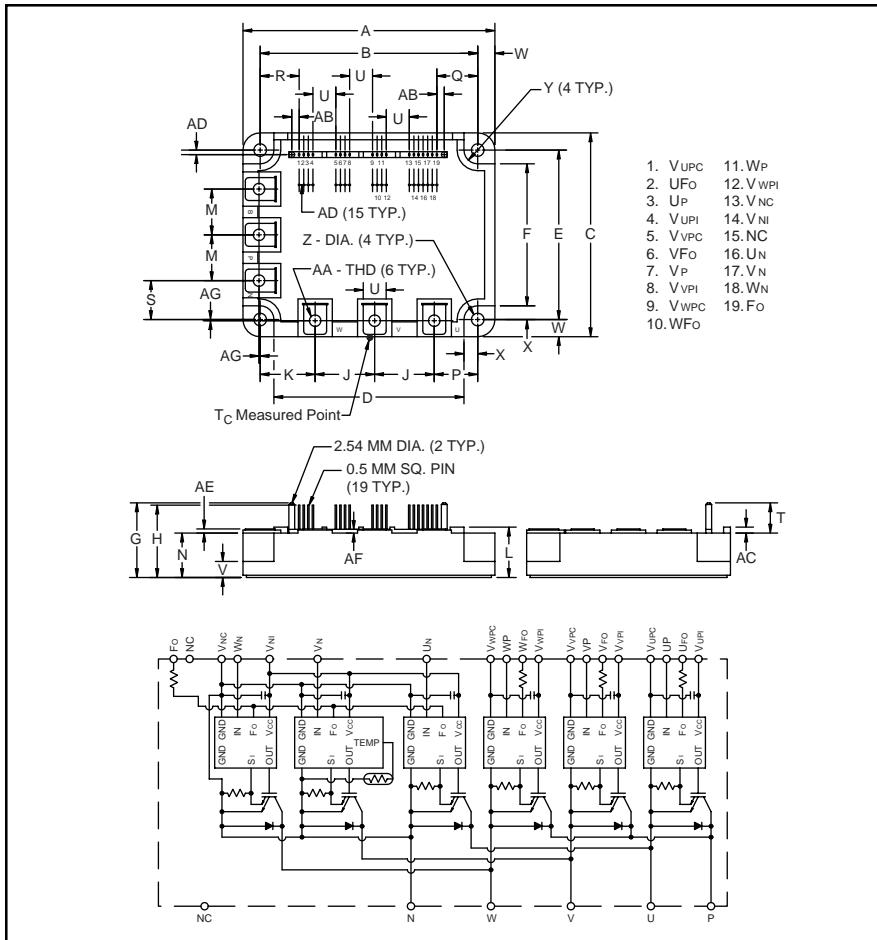

### Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

### Features:

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
  - Short Circuit
  - Over Current
  - Over Temperature
  - Under Voltage
- Low Loss Using 4th Generation IGBT Chip

### Applications:

- Inverters
- UPS
- Motion/Servo Control
- Power Supplies

### Ordering Information:

Example: Select the complete part number from the table below  
 -i.e. PM50CSD060 is a 600V, 50 Ampere Intellimod™ Intelligent Power Module.

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	4.33±0.04	110.0±1.0
B	3.74±0.02	95.0±0.5
C	3.50±0.04	89.0±1.0
D	3.27	83.0
E	2.91±0.02	74.0±0.5
F	2.44	62.0
G	1.28	32.6
H	1.24	31.6
J	1.02	26.0
K	0.94	24.0
L	0.87 +0.06/-0	22.0 +1.5/-0.0
M	0.79	20.0
N	0.76	19.4
P	0.75	19.0
Q	0.708	17.98
R	0.670	17.02

Dimensions	Inches	Millimeters
S	0.67	17.0
T	0.52	13.2
U	0.39	10.0
V	0.28	7.0
W	0.30	7.5
X	0.24	6.0
Y	0.24 Rad.	Rad. 6.0
Z	0.22 Dia.	Dia. 5.5
AA	Metric M5	M5
AB	0.127	3.22
AC	0.10	2.6
AD	0.08±0.02	2.0±0.5
AE	0.07	1.8
AF	0.06	1.6
AG	0.02±0.01	0.5±0.3

Type	Current Rating Amperes	V <sub>CES</sub> Volts (x 10)
PM	50	60



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM50CSD060**

**Intellimod™ Module**

**Three Phase IGBT Inverter Output**

50 Amperes/600 Volts

**Absolute Maximum Ratings,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	PM50CSD060	Units
Power Device Junction Temperature	$T_j$	-20 to 150	°C
Storage Temperature	$T_{stg}$	-40 to 125	°C
Case Operating Temperature	$T_C$	-20 to 100	°C
Mounting Torque, M5 Mounting Screws	—	31	in-lb
Mounting Torque, M5 Main Terminal Screws	—	31	in-lb
Module Weight (Typical)	—	560	Grams
Supply Voltage Protected by OC and SC ( $V_D = 13.5 - 16.5\text{V}$ , Inverter Part) $T_j = 125^\circ\text{C}$	$V_{CC(\text{prot.})}$	400	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	$V_{ISO}$	2500	Volts

**IGBT Inverter Sector**

Collector-Emitter Voltage ( $V_D = 15\text{V}$ , $V_{CIN} = 15\text{V}$ )	$V_{CES}$	600	Volts
Collector Current, $\pm$ ( $T_C = 25^\circ\text{C}$ )	$I_C$	50	Amperes
Peak Collector Current, $\pm$ ( $T_C = 25^\circ\text{C}$ )	$I_{CP}$	100	Amperes
Supply Voltage (Applied between P - N)	$V_{CC}$	400	Volts
Supply Voltage, Surge (Applied between P - N)	$V_{CC(\text{surge})}$	500	Volts
Collector Dissipation ( $T_C = 25^\circ\text{C}$ )	$P_C$	125	Watts

**Control Sector**

Supply Voltage Applied between ( $V_{UP1}-V_{UPC}$ , $V_{VP1}-V_{VPC}$ , $V_{WP1}-V_{WPC}$ , $V_{N1}-V_{NC}$ )	$V_D$	20	Volts
Input Voltage Applied between ( $U_P-V_{UPC}$ , $V_P-V_{VPC}$ , $W_P-V_{WPC}$ , $U_N-V_N-W_N-V_{NC}$ )	$V_{CIN}$	20	Volts
Fault Output Supply Voltage (Applied between $F_O$ and $V_C$ )	$V_{FO}$	20	Volts
Fault Output Current ( $U_{FO}$ , $V_{FO}$ , $W_{FO}$ , $F_O$ )	$I_{FO}$	20	mA

**Electrical and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>IGBT Inverter Sector</b>						
Collector Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}$ , $T_j = 25^\circ\text{C}$ , $V_D = 15\text{V}$ , $V_{CIN} = 15\text{V}$	—	—	1.0	mA
		$V_{CE} = V_{CES}$ , $T_j = 125^\circ\text{C}$ , $V_D = 15\text{V}$ , $V_{CIN} = 15\text{V}$	—	—	10	mA
Diode Forward Voltage	$V_{EC}$	$-I_C = 50\text{A}$ , $V_D = 15\text{V}$ , $V_{CIN} = 15\text{V}$	—	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$V_D = 15\text{V}$ , $V_{CIN} = 0\text{V}$ , $I_C = 50\text{A}$ , $T_j = 25^\circ\text{C}$	—	1.70	2.3	Volts
		$V_D = 15\text{V}$ , $V_{CIN} = 0\text{V}$ , $I_C = 50\text{A}$ , $T_j = 125^\circ\text{C}$	—	1.70	2.3	Volts
Inductive Load Switching Times	$t_{on}$		0.8	1.2	2.4	$\mu\text{s}$
	$t_{rr}$	$V_D = 15\text{V}$ , $V_{CIN} = 0 \sim 15\text{V}$	—	0.15	0.3	$\mu\text{s}$
	$t_{C(on)}$	$V_{CC} = 300\text{V}$ , $I_C = 50\text{A}$	—	0.4	1.0	$\mu\text{s}$
	$t_{off}$	$T_j = 125^\circ\text{C}$	—	2.4	3.3	$\mu\text{s}$
	$t_{C(off)}$		—	0.6	1.2	$\mu\text{s}$



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM50CSD060**  
**Intellimod™ Module**  
**Three Phase IGBT Inverter Output**  
50 Amperes/600 Volts

### Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>Control Sector</b>						
Over Current Trip Level Inverter Part ( $V_D = 15V$ )	OC	$T_j = -20^\circ\text{C}$ $T_j = 25^\circ\text{C}$ $T_j = 125^\circ\text{C}$	— 109 65	— 128 —	220 180 —	Amperes
Short Circuit Trip Level Inverter Part	SC	$-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}, V_D = 15V$	—	132	—	Amperes
Over Current Delay Time	$t_{off(OC)}$	$V_D = 15V$	—	10	—	$\mu\text{s}$
Over Temperature Protection ( $V_D = 15V$ ) (Lower Arm)	OT OTR	Trip Level Reset Level	111 —	118 100	125	$^\circ\text{C}$
Supply Circuit Under Voltage Protection ( $-20 \leq T_j \leq 125^\circ\text{C}$ )	UV UV <sub>R</sub>	Trip Level Reset Level	11.5 —	12.0 12.5	12.5	Volts
Circuit Current	$I_D$	$V_D = 15V, V_{CIN} = 15V, V_{N1}-V_{NC}$ $V_D = 15V, V_{CIN} = 15V, V_{XP1}-V_{XPC}$	— —	40 13	55 18	mA
Input ON Threshold Voltage	$V_{CIN(on)}$	Applied between	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{CIN(off)}$	$U_P, V_P, W_P, U_N, V_N, W_N-V_{NC}$	1.7	2.0	2.3	Volts
Fault Output Current*	$I_{FO(H)}$ $I_{FO(L)}$	$V_D = 15V, V_{FO} = 15V$ $V_D = 15V, V_{FO} = 15V$	— —	— 10	0.01 15	mA
Minimum Fault Output Pulse Width*	$t_{FO}$	$V_D = 15V$	1.0	1.8	—	$\text{mS}$

\*Fault output is given only when the internal OC, SC, OT and UV protections schemes of either upper or lower devide operate to protect it.

### Thermal Characteristics

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Each IGBT	—	—	1.00	$^\circ\text{C}/\text{Watt}$
	$R_{th(j-c)F}$	Each FWDi	—	—	2.50	$^\circ\text{C}/\text{Watt}$
	$R_{th(j-c')Q}$	Each IGBT**	—	—	0.82†	$^\circ\text{C}/\text{Watt}$
	$R_{th(j-c')F}$	Each FWDi**	—	—	1.51†	$^\circ\text{C}/\text{Watt}$
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module, Thermal Grease Applied	—	—	0.027	$^\circ\text{C}/\text{Watt}$

\*\*  $T_C$  measured point is just under chip.

† If you use this value,  $R_{th(f-a)}$  should be measured just under the chips.

### Recommended Conditions for Use

Characteristic	Symbol	Condition	Value	Units
Supply Voltage	$V_{CC}$	Applied across P-N Terminals	0 ~ 400	Volts
Control Supply Voltage***	$V_D$	Applied between $V_{UP1}-V_{UPC}$ , $V_{N1}-V_{NC}$ , $V_{VP1}-V_{VPC}$ , $V_{WP1}-V_{WPC}$	$15 \pm 1.5$	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between	0 ~ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	$U_P, V_P, W_P, U_N, V_N, W_N-V_{NC}$	4.0 ~ $V_D$	Volts
PWM Input Frequency	$f_{PWM}$	Using Application Circuit	0 ~ 20	kHz
Minimum Dead Time	$t_{DEAD}$	Input Signal	$\geq 2.5$	$\mu\text{s}$

\*\*\* With ripple satisfying the following conditions:  $dv/dt$  swing  $\leq \pm 5\text{V}/\mu\text{s}$ , Variation  $\leq 2\text{V}$  peak to peak.

**PM50CSD060**

**Intellimod™ Module**

**Three Phase IGBT Inverter Output**

50 Amperes/600 Volts

