

Development Boards



As seen on:













A World Beyond Your Smartphone

Imagine if you could take apart a smartphone and pull out all the hardware that makes it smart, then snap off a single sensor and stick it to a wall or wherever, as simply as you would cut & paste blocks of working code in a text editor?

That's the essence of the WunderBar.

You have access to all the data from these sensors and modules, without having to learn about hardware. No wires no soldering no nothing. You can develop Android or iOS Internet Of Things apps just like you're used to, in Xcode, Android SDK or any text editor with command-line





compilers.

It's all because it's connected to a cloud.



It's Raining Chocolate!

Sensor readings are instantly sent to the Relayr Cloud which stores them into your secure personal account. The cloud hosts iOS, Android and node.js SDKs, APIs, frameworks and libraries that allow you to read all the data from the sensors so you can easily access them and process them from within your app.



Main Module










IR Transmitter

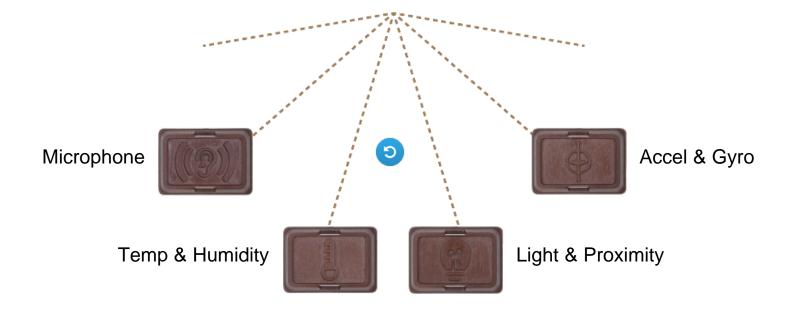



Works right away

Each module is fitted with firmware that makes it fully functional from the start.

Yet it's flexible enough to allow you to configure it for your App.



Fast and secure

Based on core technologies developed by Twitter, LinkedIn and Yahoo, the Wunderbar kit and Cloud constitute a fast, secure and scalable system.




Energy-efficient

Each sensor module runs on a single coin cell battery that will last for at least a month. It's because of the way the firmware utilizes the BLE transmitter.


Tastes Better When You Share It

The temperature sensor is publicly accessible right out of the box. Over time, every developer will be able to tap in to a world wide network of WunderBar sensors, giving you a wealth of data you can put into use in your Internet of Things apps.

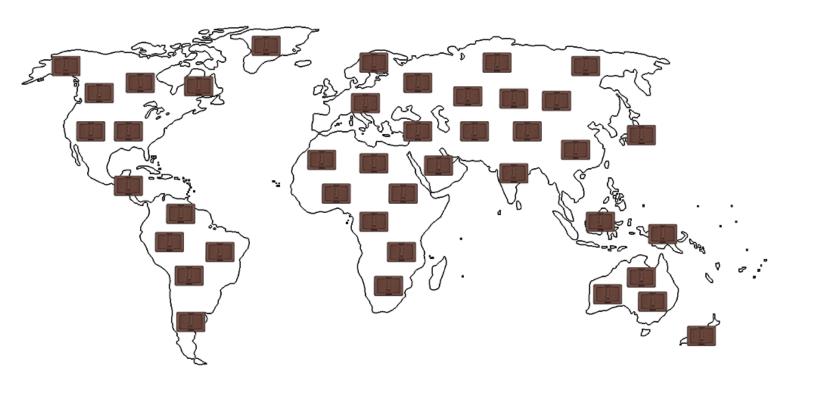

Tech specs

The WunderBar is delivered as a single block of PCB. The modules are separated with V-cut inscisions. You can snap each of them off if needed. Put a battery into a socket on the backside of each sensor and plug in the USB power supply to the main module. They will start communicating right away through Bluetooth Low Energy (BLE).

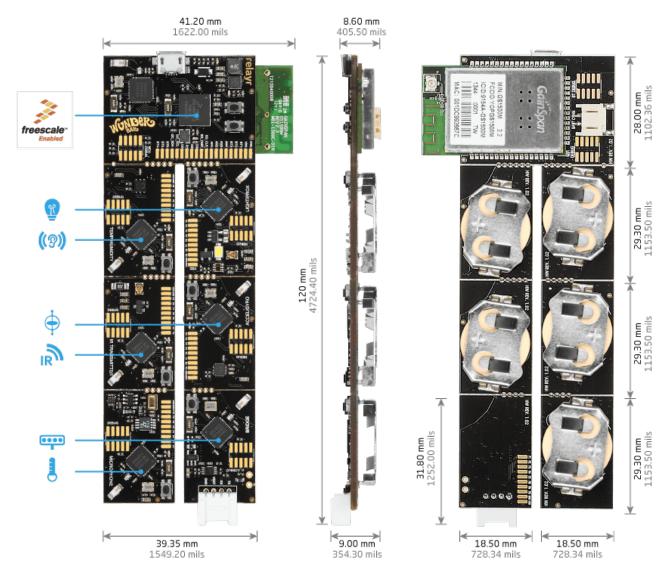

Master module





- Main MCU: Freescale MK24FN1M0VDC12, Kinetis-K 32-bit ARM® Cortex™-M4 core with DSP instructions
 - Clock Speed: 120MHz
 - Flash: 1024 KB
 - SRAM: 250 KB
- Gainspan GS1500M WiFi module: IEEE 802.11b/g/n, WPA/WPA2, full TCP/IP stack including SSL/TLS
- Nordic nRF51822 BLE (ARM® Cortex $^{\text{TM}}$ -M0, Bluetooth 4.0 stack)
- IO: 12 exposed GPIO pads, including 4 ADC, SPI, I2C and SDIO $\,$
- 3.3V regulator including Li-Ion/Li-Po charger
- Full-speed USB w/OTG controller
- 32 kHz Xtal oscillator for RTC

Sensor modules



- SoC: Nordic nRF51822 BLE (ARM® Cortex™-M0, Bluetooth 4.0 stack)
 - Clock Speed: 16MHz
 - RAM: 16 KB
 - Flash: 256 KB
- IO: 8 exposed GPIO pads, including SPI, I2C, TWI, UART, ADC
- 32 kHz Xtal oscillator
- One of the following sensors:



Temp / Humidity

Features **HTU21D**, a low power digital sensor of relative humidity and temperature.



Accel & Gyro

Features **MPU-6500** six-axis (gyro + accelerometer) MEMS
MotionTracking[™] device.



Light / Proximity

Features **TCS37717** high sensitivity RGB color sensing and proximity detector.



IR Transmitter

Features **SFH4441** high power infrared emitter, 950 nm, special package, half angle ±17°



Microphone

Features **SPQ0410HR5H-B**, a miniature, high-performance, low power silicon microphone.



Bridge

Features 4-pin connector compatible with Grove add-on boards and sensors.





What you get



Package dimensions: L 215mm, **W** 145mm, **H** 40mm



Package weight: ~400g



Order Now

Try the WunderBar and watch how yesterday's limits of App development for iOS and Android devices start melting away like a piece of chocolate on your tongue, releasing an abundance of new possibilities that will amaze and excite you. You'll be like a wide eyed kid tasting chocolate for the first time!

MIKROE-1703

WunderBar - IoT Starter Kit









dsPIC Solution STM32 Solution 3051 Solution STM32 Development Boards 8051 Dev. Boards PIC Development Boards dsPIC Development Boards Click Boards 8051 Compilers PIC Compilers dsPIC Compilers STM32 Compilers mikromedia shields 8051 Programmers PIC Programmers/Debuggers dsPIC Programmers/Debuggers STM32 Programmers/Debuggers PIC Kits dsPIC Kits STM32 Kits 8051 Books Storage PIC Books dsPIC Books 8051 Kits Real Time Clock Tiva C Series Solution Display Additional Software Tiva C Development Boards Measurement Tiva C Compilers Visual TFT PIC32 Development Boards AVR Development Boards Audio & Voice AVR Compilers PIC32 Compilers Tiva C Programmers/Debuggers Visual GLCD Power Supply PIC32 Programmers/Debuggers AVR Programmers/Debuggers Tiva C Kits Package Manager PIC32 Kits AVR Kits GLCD Font Creator GSM/GPRS Timer Calculator ## mikroBUS ## Lets make \$\infty\$ Press ## Legal X Archive Customization Support About Us

Copyright © 1998 - 2014. MikroElektronika. All rights reserved. All trade and/or services marks mentioned are the property of their respective owners.