

## SUMMARY

### # Wires

Low	3
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	3T
Termination type	Male solder
IP rating	68
Cable Ø	6.60 - 7.00 mm
Matching parts	EGG.3T.303.CLL
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FG*: Straight plug, cable collet
Keying	
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	C70: 6.6 - 7 mm
Variant	

### Performance

Configuration	
Insulator	
Rated Current	25 Amps

### Specifications

Contact Type:	Solder
Vtest:	1500 V (DC)1100 V (AC)

### Others


Temp (min / max):	-55° C / +200° C
-------------------	------------------

Humidity (max): <=95% [at 60 deg C /140 F]  
Vibration: 15 g [10 Hz - 2000 Hz]  
Shock Resistance: 100 g [ 6 ms]  
Salt Spray Corrosion: >144 hr  
Climatical Category: 50/175/21  
Shielding (min): 75 dB (10 MHz)  
Shielding (min): 40 dB (1 GHz)  
IP Rating: 68

---

## DRAWINGS

Draws

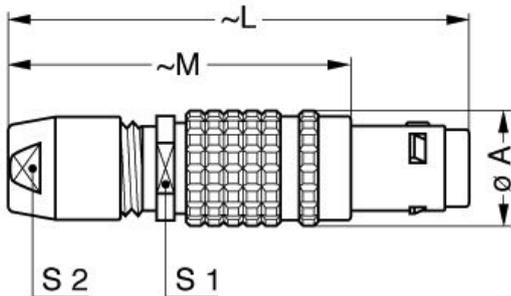

Dimensions

	A	L	M
mm.	17	64	49
in.	0,67	2,52	1,93

---

## RECOMMENDED BY LEMO

Tools

None

Cables