

## 600mA Driver Tr. Built-In, Synchronous Step-Down DC/DC Converters

## GENERAL DESCRIPTION

GreenOperation Compatible

The XC9235/XC9236/XC9237 series is a group of synchronous-rectification type DC/DC converters with a built-in 0.42 P-channel MOS driver transistor and 0.52 N-channel MOS switching transistor, designed to allow the use of ceramic capacitors. Operating voltage range is from 2.0V to 6.0V (A ~ C types), 1.8V to 6.0V (D ~ G types). For the D/F types which have a reference voltage of 0.8V (accuracy:  $\pm 2.0\%$ ), the output voltage can be set from 0.9V by using two external resistors. The A/B/C/E/G types have a fixed output voltage from 0.8V to 4.0V in increments of 0.05V (accuracy:  $\pm 2.0\%$ ). The device provides a high efficiency, stable power supply with an output current of 600mA to be configured using only a coil and two capacitors connected externally. With the built-in oscillator, either 1.2MHz or 3.0MHz can be selected for suiting to your particular application. As for operation mode, the XC9235 series is PWM control, the XC9236 series is automatic PWM/PFM switching control and the XC9237 series can be manually switched between the PWM control mode and the automatic PWM/PFM switching control mode, allowing fast response, low ripple and high efficiency over the full range of loads (from light load to heavy load).

The soft start and current control functions are internally optimized. During stand-by, all circuits are shutdown to reduce current consumption to as low as  $1.0\ \mu\text{A}$  or less. The B/F/G types have a high speed soft-start as fast as 0.25ms in typical for quick turn-on. With the built-in UVLO (Under Voltage Lock Out) function, the internal P-channel MOS driver transistor is forced OFF when input voltage becomes 1.4V or lower.

The B to G types integrate  $C_L$  discharge function which enables the electric charge at the output capacitor  $C_L$  to be discharged via the internal discharge switch located between the  $L_X$  and  $V_{SS}$  pins. When the devices enter stand-by mode, output voltage quickly returns to the  $V_{SS}$  level as a result of this function.

Four types of package SOT-25, USP-6C, USP-6EL and WLP-5-03 are available.

## APPLICATIONS

Smart phones / Mobile phones  
Bluetooth  
Mobile devices / terminals  
Portable game consoles  
Digital still cameras / Camcorders  
Note PCs / Tablet PCs

## FEATURES


|                               |   |
|-------------------------------|---|
| Driver Transistor Built-In    | : 0.42 P-ch driver transistor<br>0.52 N-ch switch transistor  |
| Input Voltage                 | : 2.0V ~ 6.0V (A/B/C types)<br>1.8V ~ 6.0V (D/E/F/G types)  |
| Output Voltage                | : 0.8V ~ 4.0V (Internally set)<br>0.9V ~ 6.0V (Externally set)  |
| High Efficiency               | : 92% (TYP.)*   |
| Output Current                | : 600mA   |
| Oscillation Frequency         | : 1.2MHz, 3.0MHz ( $\pm 15\%$ )   |
| Maximum Duty Cycle            | : 100%  |
| Control Methods               | : PWM (XC9235)<br>PWM/PFM Auto (XC9236)<br>PWM/PFM Manual (XC9237)  |
| Function                      | : Current Limiter Circuit Built-In (Constant Current & Latching)<br>$C_L$ Discharge (B/C/D/E/F/G types)<br>High Speed Soft Start (B/F/G type) |
| Capacitor                     | : Low ESR Ceramic Capacitor   |
| Operating Ambient Temperature | : -40 ~ +85   |
| Packages                      | : SOT-25 (A/B/C types only)<br>USP-6C<br>USP-6EL (A/B/C types only)<br>WLP-5-03 (A/B types only)  |
| Environmentally Friendly      | : EU RoHS Compliant, Pb Free  |

\* Performance depends on external components and wiring on the PCB.

## TYPICAL APPLICATION CIRCUIT


XC9235/XC9236/XC9237

A/B/C/E/G types (Output Voltage Fixed)

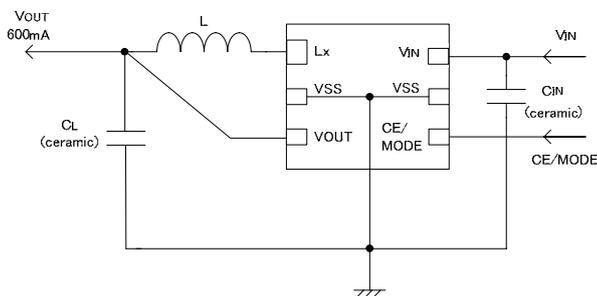


XC9235/XC9236/XC9237


D/F types (Output Voltage Externally Set)

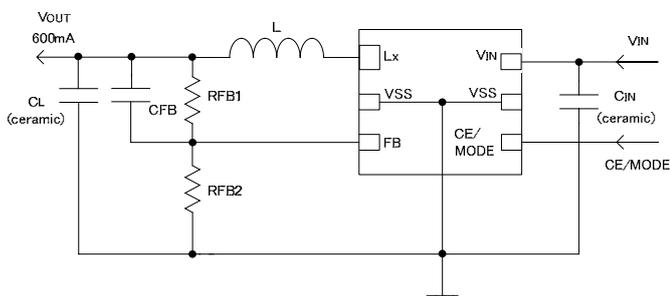


## TYPICAL PERFORMANCE CHARACTERISTICS

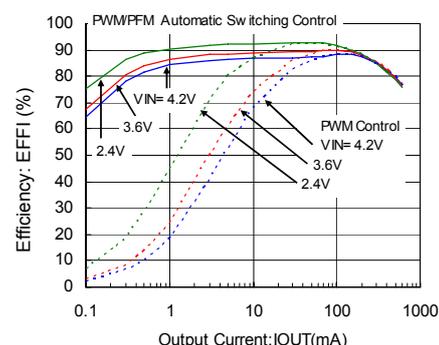Efficiency vs. Output Current (  $f_{osc}=1.2\text{MHz}$ ,  $V_{OUT}=1.8\text{V}$  )


## PIN CONFIGURATION




SOT-25  
(TOP VIEW)

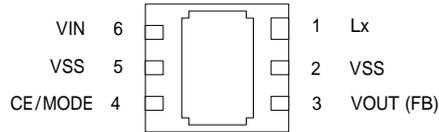

USP-6C  
(BOTTOM VIEW)

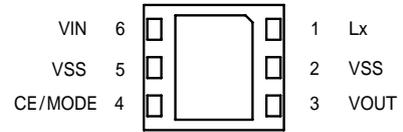

USP-6EL  
(BOTTOM VIEW)

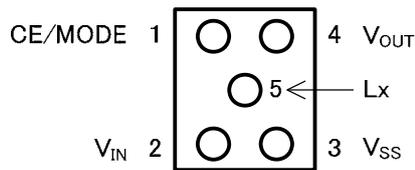

WLP-5-03  
(BOTTOM VIEW)

\* Please short the  $V_{SS}$  pin (No. 2 and 5).

\* The dissipation pad for the USP-6C package should be solder-plated in recommended mount pattern and metal masking so as to enhance mounting strength and heat release. If the pad needs to be connected to other pins, it should be connected to the  $V_{SS}$  (No. 5) pin.

## PIN ASSIGNMENT

| PIN NUMBER |                |          | PIN NAME        | FUNCTIONS  |
|------------|----------------|----------|-----------------|--|
| SOT-25     | USP-6C/USP-6EL | WLP-5-03 |                 |  |
| 1          | 6              | 2        | $V_{IN}$        | Power Input  |
| 2          | 2, 5           | 3        | $V_{SS}$        | Ground   |
| 3          | 4              | 1        | CE / MODE       | High Active Enable / Mode Selection Pin  |
| 4          | 3              | 4        | $V_{OUT}$<br>FB | Fixed Output Voltage Pin (A/B/C/E/G types)<br>Output Voltage Sense Pin (D/F types) |
| 5          | 1              | 5        | Lx              | Switching Output   |

## PRODUCT CLASSIFICATION

### Ordering Information

|               |        |  |
|---------------|--------|--|
| <u>XC9235</u> | - (*1) | Fixed PWM control  |
| <u>XC9236</u> | - (*1) | PWM / PFM automatic switching control                              |
| <u>XC9237</u> | - (*1) | Fixed PWM control ⇔ PWM / PFM automatic switching manual selection |

| DESIGNATOR | ITEM   | SYMBOL  | DESCRIPTION   |
|------------|--|---|---|
|            | Fixed Output voltage (V <sub>OUT</sub> )<br>Functional selection | A   | V <sub>IN</sub> 2.0V, No C <sub>L</sub> discharge, Low speed soft-start   |
|            |  | B   | V <sub>IN</sub> 2.0V, C <sub>L</sub> discharge, High speed soft-start   |
|            |  | C   | V <sub>IN</sub> 2.0V, C <sub>L</sub> discharge, Low speed soft-start  |
|            |  | E   | V <sub>IN</sub> 1.8V, C <sub>L</sub> discharge, Low speed soft-start  |
|            |  | G   | V <sub>IN</sub> 1.8V, C <sub>L</sub> discharge, High speed soft-start   |
|            | Adjustable Output voltage (FB)<br>Functional selection           | D   | V <sub>IN</sub> 1.8V, C <sub>L</sub> discharge, Low speed soft-start  |
| F          |  | V <sub>IN</sub> 1.8V, C <sub>L</sub> discharge, High speed soft-start |   |
|            | Fixed Output Voltage<br>(V <sub>OUT</sub> )                      | 08 ~ 40   | Output voltage options<br>e.g. V <sub>OUT</sub> =2.8V =2, =8<br>V <sub>OUT</sub> =2.85V =2, =L<br>0.05V increments: 0.05=A, 0.15=B, 0.25=C, 0.35=D, 0.45=E,<br>0.55=F, 0.65=H, 0.75=K, 0.85=L, 0.95=M |
|            | Adjustable Output Voltage<br>(FB)                                | 08  | Reference voltage is fixed in 0.8V<br>=0, =8  |
|            | Oscillation Frequency  | C   | 1.2MHz  |
|            |  | D   | 3.0MHz  |
| -          | Packages<br>(Order Unit)   | MR  | SOT-25 <sup>(*)2</sup> (3,000/Reel)   |
|            |  | MR-G  | SOT-25 <sup>(*)2</sup> (3,000/Reel)   |
|            |  | ER  | USP-6C (3,000/Reel)   |
|            |  | ER-G  | USP-6C (3,000/Reel)   |
|            |  | 4R-G  | USP-6EL <sup>(*)2</sup> (3,000/Reel)  |
|            |  | 0R-G  | WLP-5-03 <sup>(*)3</sup> (3,000/Reel)   |

(\*1) The "-G" suffix denotes Halogen and Antimony free as well as being fully EU RoHS compliant.

(\*2) SOT-25, USP-6EL package are available for the A/B/C series only.


(\*3) WLP-5-03 package is available for the A/B series only.

# XC9235/XC9236/XC9237 Series

## BLOCK DIAGRAM


XC9235 / XC9236 / XC9237

A Series

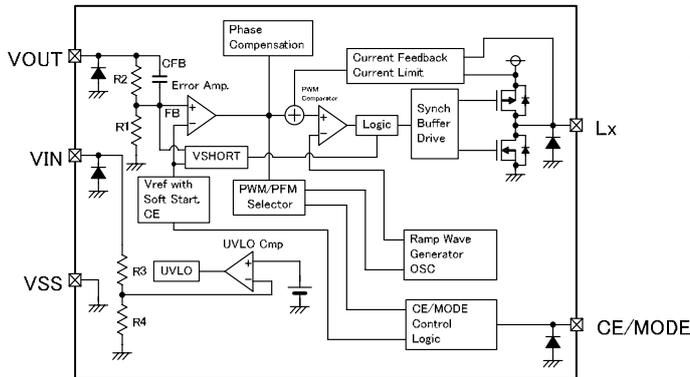


XC9235 / XC9236 / XC9237

B/C/E/G Series

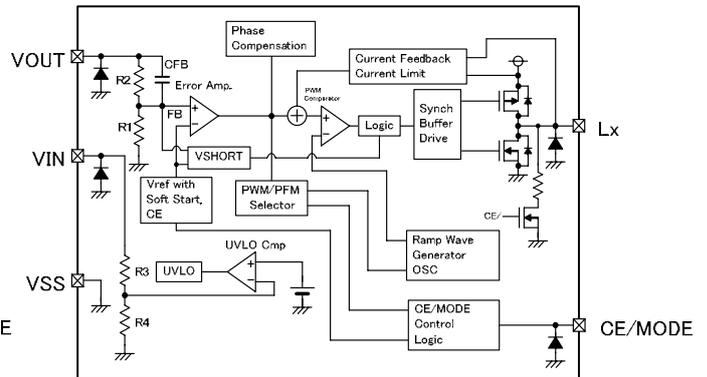

XC9235 / XC9236 / XC9237

D/F Series

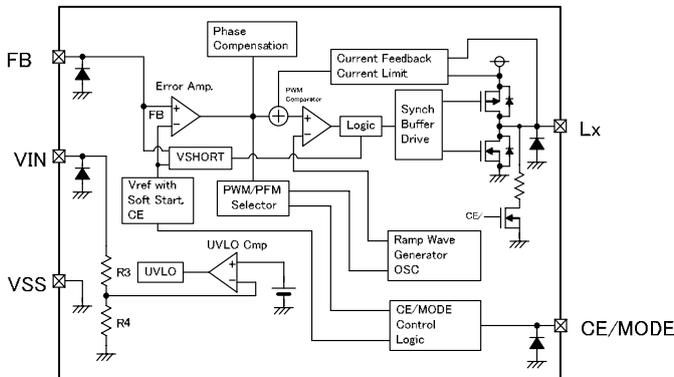

NOTE: The signal from CE/MODE Control Logic to PWM/PFM Selector is being fixed to "L" level inside, and XC9235 series chooses only PWM control.  
The signal from CE/MODE Control Logic to PWM/PFM Selector is being fixed to "H" level inside, and XC9236 series chooses only PWM/PFM automatic switching control.  
Diodes inside the circuit are ESD protection diodes and parasitic diodes.

## ABSOLUTE MAXIMUM RATINGS

Ta=25

| PARAMETER                     | SYMBOL           | RATINGS                       | UNIT |
|-------------------------------|------------------|-------------------------------|------|
| V <sub>IN</sub> Pin Voltage   | V <sub>IN</sub>  | - 0.3 ~ 6.5                   | V    |
| Lx Pin Voltage                | V <sub>Lx</sub>  | - 0.3 ~ V <sub>IN</sub> + 0.3 | V    |
| V <sub>OUT</sub> Pin Voltage  | V <sub>OUT</sub> | - 0.3 ~ 6.5                   | V    |
| FB Pin Voltage                | V <sub>FB</sub>  | - 0.3 ~ 6.5                   | V    |
| CE / MODE Pin Voltage         | V <sub>CE</sub>  | - 0.3 ~ 6.5                   | V    |
| Lx Pin Current                | I <sub>Lx</sub>  | ±1500                         | mA   |
| Power Dissipation             | SOT-25           | 250                           | mW   |
|                               | USP-6C           | 120                           |      |
|                               | USP-6EL          | 120                           |      |
|                               | WLP-5-03         | 750                           |      |
| Operating Ambient Temperature | T <sub>opr</sub> | - 40 ~ + 85                   | °C   |
| Storage Temperature           | T <sub>stg</sub> | - 55 ~ + 125                  | °C   |

## ELECTRICAL CHARACTERISTICS

XC9235A18Cxx/XC9236A18Cxx/XC9237A18Cxx,  $V_{OUT}=1.8V$ ,  $f_{OSC}=1.2MHz$ ,  $T_a=25$

| PARAMETER                                  | SYMBOL                               | CONDITIONS   | MIN.            | TYP.      | MAX.           | UNIT    | CIRCUIT |
|--|--------------------------------------|--|-----------------|-----------|----------------|---------|---------|
| Output Voltage                             | $V_{OUT}$                            | When connected to external components,<br>$V_{IN}=V_{CE}=5.0V$ , $I_{OUT}=30mA$  | 1.764           | 1.800     | 1.836          | V       |         |
| Operating Voltage Range                    | $V_{IN}$                             |  | 2.0             | -         | 6.0            | V       |         |
| Maximum Output Current                     | $I_{OUTMAX}$                         | $V_{IN}=V_{OUT(E)}+2.0V$ , $V_{CE}=1.0V$ ,<br>When connected to external components <sup>(9)</sup>   | 600             | -         | -              | mA      |         |
| UVLO Voltage                               | $V_{UVLO}$                           | $V_{CE}=V_{IN}$ , $V_{OUT}=0V$ ,<br>Voltage which Lx pin holding "L" level <sup>(1, *11)</sup>   | 1.00            | 1.40      | 1.78           | V       |         |
| Supply Current                             | $I_{DD}$                             | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 1.1V$  | -               | 15        | 33             | $\mu A$ |         |
| Stand-by Current                           | $I_{STB}$                            | $V_{IN}=5.0V$ , $V_{CE}=0V$ , $V_{OUT}=V_{OUT(E)} \times 1.1V$   | -               | 0         | 1.0            | $\mu A$ |         |
| Oscillation Frequency                      | $f_{OSC}$                            | When connected to external components,<br>$V_{IN}=V_{OUT(E)}+2.0V$ , $V_{CE}=1.0V$ , $I_{OUT}=100mA$   | 1020            | 1200      | 1380           | kHz     |         |
| PFM Switching Current                      | $I_{PFM}$                            | When connected to external components,<br>$V_{IN}=V_{OUT(E)}+2.0V$ , $V_{CE}=V_{IN}$ , $I_{OUT}=1mA$ <sup>(12)</sup>   | 120             | 160       | 200            | mA      |         |
| PFM Duty Limit                             | $DTY_{LIMIT\_PFM}$                   | $V_{CE}=V_{IN}=(C-1)$ , $I_{OUT}=1mA$ <sup>(12)</sup>  |                 | 200       | 300            | %       |         |
| Maximum Duty Cycle                         | $DTY_{MAX}$                          | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 0.9V$  | 100             | -         | -              | %       |         |
| Minimum Duty Cycle                         | $DTY_{MIN}$                          | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 1.1V$  | -               | -         | 0              | %       |         |
| Efficiency <sup>(2)</sup>                  | EFFI                                 | When connected to external components,<br>$V_{CE}=V_{IN}=V_{OUT(E)}+1.2V$ , $I_{OUT}=100mA$  | -               | 92        | -              | %       |         |
| Lx SW "H" ON Resistance 1                  | $R_{LxH}$                            | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=0V$ , $I_{Lx}=100mA$ <sup>(3)</sup>  | -               | 0.35      | 0.55           |         |         |
| Lx SW "H" ON Resistance 2                  | $R_{LxH}$                            | $V_{IN}=V_{CE}=3.6V$ , $V_{OUT}=0V$ , $I_{Lx}=100mA$ <sup>(3)</sup>  | -               | 0.42      | 0.67           |         |         |
| Lx SW "L" ON Resistance 1                  | $R_{LxL}$                            | $V_{IN}=V_{CE}=5.0V$ <sup>(4)</sup>  | -               | 0.45      | 0.65           |         |         |
| Lx SW "L" ON Resistance 2                  | $R_{LxL}$                            | $V_{IN}=V_{CE}=3.6V$ <sup>(4)</sup>  | -               | 0.52      | 0.77           |         | -       |
| Lx SW "H" Leak Current <sup>(5)</sup>      | $I_{LEAKH}$                          | $V_{IN}=V_{OUT}=5.0V$ , $V_{CE}=0V$ , $Lx=0V$  | -               | 0.01      | 1.0            | $\mu A$ |         |
| Lx SW "L" Leak Current <sup>(5)</sup>      | $I_{LEAKL}$                          | $V_{IN}=V_{OUT}=5.0V$ , $V_{CE}=0V$ , $Lx=5.0V$  | -               | 0.01      | 1.0            | $\mu A$ |         |
| Current Limit <sup>(10)</sup>              | $I_{LIM}$                            | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 0.9V$ <sup>(8)</sup>   | 900             | 1050      | 1350           | mA      |         |
| Output Voltage Temperature Characteristics | $\frac{V_{OUT}}{V_{OUT} \cdot Topr}$ | $I_{OUT}=30mA$ , $-40$ $Topr$ $85$   | -               | $\pm 100$ | -              | ppm/    |         |
| CE "H" Voltage                             | $V_{CEH}$                            | $V_{OUT}=0V$ , Applied voltage to $V_{CE}$ ,<br>Voltage changes Lx to "H" level <sup>(11)</sup>  | 0.65            | -         | 6.0            | V       |         |
| CE "L" Voltage                             | $V_{CEL}$                            | $V_{OUT}=0V$ , Applied voltage to $V_{CE}$ ,<br>Voltage changes Lx to "L" level <sup>(11)</sup>  | $V_{SS}$        | -         | 0.25           | V       |         |
| PWM "H" Level Voltage                      | $V_{PwMH}$                           | When connected to external components,<br>$I_{OUT}=1mA$ <sup>(6)</sup> , Voltage which oscillation frequency<br>becomes 1020 kHz $f_{OSC}$ 1380kHz <sup>(13)</sup> | -               | -         | $V_{IN} - 1.0$ | V       |         |
| PWM "L" Level Voltage                      | $V_{PwML}$                           | When connected to external components,<br>$I_{OUT}=1mA$ <sup>(6)</sup> , Voltage which oscillation frequency<br>becomes $f_{OSC} < 1020kHz$ <sup>(13)</sup>        | $V_{IN} - 0.25$ | -         | -              | V       |         |
| CE "H" Current                             | $I_{CEH}$                            | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=0V$  | - 0.1           | -         | 0.1            | $\mu A$ |         |
| CE "L" Current                             | $I_{CEL}$                            | $V_{IN}=5.0V$ , $V_{CE}=0V$ , $V_{OUT}=0V$   | - 0.1           | -         | 0.1            | $\mu A$ |         |
| Soft Start Time                            | $t_{SS}$                             | When connected to external components,<br>$V_{CE}=0V$ $V_{IN}$ , $I_{OUT}=1mA$   | 0.5             | 1.0       | 2.5            | ms      |         |
| Latch Time                                 | $t_{LAT}$                            | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=0.8 \times V_{OUT(E)}$ ,<br>Short Lx at 1 resistance <sup>(7)</sup>  | 1.0             | -         | 20.0           | ms      |         |
| Short Protection Threshold Voltage         | $V_{SHORT}$                          | Sweeping $V_{OUT}$ , $V_{IN}=V_{CE}=5.0V$ , Short Lx at<br>1 resistance, $V_{OUT}$ voltage which Lx becomes<br>"L" level within 1ms                                | 0.675           | 0.900     | 1.150          | V       |         |

Test conditions: Unless otherwise stated,  $V_{IN}=5.0V$ ,  $V_{OUT(E)}$ =Nominal Voltage

NOTE:

- \*1: Including hysteresis operating voltage range.
- \*2:  $EFFI = \{ (\text{output voltage} \times \text{output current}) / (\text{input voltage} \times \text{input current}) \} \times 100$
- \*3: ON resistance ( ) =  $(V_{IN} - Lx \text{ pin measurement voltage}) / 100mA$
- \*4: R&D value
- \*5: When temperature is high, a current of approximately 10  $\mu A$  (maximum) may leak.
- \*6: The CE/MODE pin of the XC9237A series works also as an external switching pin of PWM control and PWM/PFM control. When the IC is in the operation, control is switched to the automatic PWM/PFM switching mode when the CE/MODE pin voltage is equal to or greater than  $V_{IN}$  minus 0.3V, and to the PWM mode when the CE/MODE pin voltage is equal to or lower than  $V_{IN}$  minus 1.0V and equal to or greater than  $V_{CEH}$ .
- \*7: Time until it short-circuits  $V_{OUT}$  with GND via 1 of resistor from an operational state and is set to  $Lx=0V$  from current limit pulse generating.
- \*8: When  $V_{IN}$  is less than 2.4V, limit current may not be reached because voltage falls caused by ON resistance.
- \*9: When the difference between the input and the output is small, some cycles may be skipped completely before current maximizes. If current is further pulled from this state, output voltage will decrease because of P-ch driver ON resistance.
- \*10: Current limit denotes the level of detection at peak of coil current.
- \*11: "H"= $V_{IN}-V_{IN}-1.2V$ , "L"= $+0.1V \sim -0.1V$
- \*12: XC9235 series exclude  $I_{PFM}$  and  $DTY_{LIMIT\_PFM}$  because those are only for the PFM control's functions.
- \*13: XC9235/XC9236 series exclude  $V_{PwMH}$  and  $V_{PwML}$  because those are only for the XC9237 series' functions.

## ELECTRICAL CHARACTERISTICS (Continued)

XC9235A18Dxx/XC9236A18Dxx/XC9237A18Dxx,  $V_{OUT}=1.8V$ ,  $f_{OSC}=3.0MHz$ ,  $T_a=25$

| PARAMETER                                  | SYMBOL                                  | CONDITIONS  | MIN.          | TYP.      | MAX.         | UNIT    | CIRCUIT |
|--|---|---|---------------|-----------|--------------|---------|---------|
| Output Voltage                             | $V_{OUT}$                               | When connected to external components, $V_{IN}=V_{CE}=5.0V$ , $I_{OUT}=30mA$  | 1.764         | 1.800     | 1.836        | V       |         |
| Operating Voltage Range                    | $V_{IN}$                                |   | 2.0           | -         | 6.0          | V       |         |
| Maximum Output Current                     | $I_{OUTMAX}$                            | $V_{IN}=V_{OUT(E)}+2.0V$ , $V_{CE}=1.0V$ ,<br>When connected to external components <sup>(9)</sup>  | 600           | -         | -            | mA      |         |
| UVLO Voltage                               | $V_{UVLO}$                              | $V_{CE}=V_{IN}$ , $V_{OUT}=0V$ ,<br>Voltage which Lx pin holding "L" level <sup>(1,11)</sup>  | 1.00          | 1.40      | 1.78         | V       |         |
| Supply Current                             | $I_{DD}$                                | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 1.1V$   | -             | 21        | 35           | $\mu A$ |         |
| Stand-by Current                           | $I_{STB}$                               | $V_{IN}=5.0V$ , $V_{CE}=0V$ , $V_{OUT}=V_{OUT(E)} \times 1.1V$  | -             | 0         | 1.0          | $\mu A$ |         |
| Oscillation Frequency                      | $f_{OSC}$                               | When connected to external components,<br>$V_{IN}=V_{OUT(E)}+2.0V$ , $V_{CE}=1.0V$ , $I_{OUT}=100mA$  | 2550          | 3000      | 3450         | kHz     |         |
| PFM Switching Current                      | $I_{PFM}$                               | When connected to external components,<br>$V_{IN}=V_{OUT(E)}+2.0V$ , $V_{CE}=V_{IN}$ , $I_{OUT}=1mA$ <sup>(12)</sup>  | 170           | 220       | 270          | mA      |         |
| PFM Duty Limit                             | $DTY_{LIMIT\_PFM}$                      | $V_{CE}=V_{IN}-(C-1)$ , $I_{OUT}=1mA$ <sup>(12)</sup>   | -             | 200       | 300          | %       |         |
| Maximum Duty Cycle                         | $DTY_{MAX}$                             | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 0.9V$   | 100           | -         | -            | %       |         |
| Minimum Duty Cycle                         | $DTY_{MIN}$                             | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 0.1V$   | -             | -         | 0            | %       |         |
| Efficiency <sup>(2)</sup>                  | EFFI                                    | When connected to external components,<br>$V_{CE}=V_{IN}=V_{OUT(E)}+1.2V$ , $I_{OUT}=100mA$   | -             | 86        | -            | %       |         |
| Lx SW "H" ON Resistance 1                  | $R_{LXH}$                               | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=0V$ , $I_{LX}=100mA$ <sup>(3)</sup>   | -             | 0.35      | 0.55         |         |         |
| Lx SW "H" ON Resistance 2                  | $R_{LXH}$                               | $V_{IN}=V_{CE}=3.6V$ , $V_{OUT}=0V$ , $I_{LX}=100mA$ <sup>(3)</sup>   | -             | 0.42      | 0.67         |         |         |
| Lx SW "L" ON Resistance 1                  | $R_{LXL}$                               | $V_{IN}=V_{CE}=5.0V$ <sup>(4)</sup>   | -             | 0.45      | 0.65         |         | -       |
| Lx SW "L" ON Resistance 2                  | $R_{LXL}$                               | $V_{IN}=V_{CE}=3.6V$ <sup>(4)</sup>   | -             | 0.52      | 0.77         |         | -       |
| Lx SW "H" Leak Current <sup>(5)</sup>      | $I_{LEAKH}$                             | $V_{IN}=V_{OUT}=5.0V$ , $V_{CE}=0V$ , $LX=0V$   | -             | 0.01      | 1.0          | $\mu A$ |         |
| Lx SW "L" Leak Current <sup>(5)</sup>      | $I_{LEAKL}$                             | $V_{IN}=V_{OUT}=5.0V$ , $V_{CE}=0V$ , $LX=5.0V$   | -             | 0.01      | 1.0          | $\mu A$ |         |
| Current Limit <sup>(10)</sup>              | $I_{LIM}$                               | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 0.9V$ <sup>(8)</sup>  | 900           | 1050      | 1350         | mA      |         |
| Output Voltage Temperature Characteristics | $\frac{V_{OUT}}{V_{OUT} \cdot T_{opr}}$ | $I_{OUT}=30mA$ , -40 $T_{opr}$ 85   | -             | $\pm 100$ | -            | ppm/    |         |
| CE "H" Voltage                             | $V_{CEH}$                               | $V_{OUT}=0V$ , Applied voltage to $V_{CE}$ ,<br>Voltage changes Lx to "H" level <sup>(11)</sup>   | 0.65          | -         | 6.0          | V       |         |
| CE "L" Voltage                             | $V_{CEL}$                               | $V_{OUT}=0V$ , Applied voltage to $V_{CE}$ ,<br>Voltage changes Lx to "L" level <sup>(11)</sup>   | $V_{SS}$      | -         | 0.25         | V       |         |
| PWM "H" Level Voltage                      | $V_{PWHM}$                              | When connected to external components,<br>$I_{OUT}=1mA$ <sup>(6)</sup> , Voltage which oscillation frequency<br>becomes 2550kHz $f_{OSC}$ 3450kHz <sup>(13)</sup> | -             | -         | $V_{IN}-1.0$ | V       |         |
| PWM "L" Level Voltage                      | $V_{PWML}$                              | When connected to external components,<br>$I_{OUT}=1mA$ <sup>(6)</sup> , Voltage which oscillation frequency<br>becomes $f_{OSC} < 2550kHz$ <sup>(13)</sup>       | $V_{IN}-0.25$ | -         | -            | V       |         |
| CE "H" Current                             | $I_{CEH}$                               | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=0V$   | -0.1          | -         | 0.1          | $\mu A$ |         |
| CE "L" Current                             | $I_{CEL}$                               | $V_{IN}=5.0V$ , $V_{CE}=0V$ , $V_{OUT}=0V$  | -0.1          | -         | 0.1          | $\mu A$ |         |
| Soft Start Time                            | $t_{SS}$                                | When connected to external components,<br>$V_{CE}=0V$ $V_{IN}$ , $I_{OUT}=1mA$  | 0.5           | 0.9       | 2.5          | ms      |         |
| Latch Time                                 | $t_{LAT}$                               | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=0.8 \times V_{OUT(E)}$ ,<br>Short Lx at 1 resistance <sup>(7)</sup>   | 1.0           | -         | 20           | ms      |         |
| Short Protection Threshold Voltage         | $V_{SHORT}$                             | Sweeping $V_{OUT}$ , $V_{IN}=V_{CE}=5.0V$ , Short Lx at<br>1 resistance, $V_{OUT}$ voltage which Lx becomes<br>"L" level within 1ms                               | 0.675         | 0.900     | 1.150        | V       |         |

Test conditions: Unless otherwise stated,  $V_{IN}=5.0V$ ,  $V_{OUT(E)}$ =Nominal Voltage

NOTE:

\*1: Including hysteresis operating voltage range.

\*2:  $EFFI = \{ ( \text{output voltage} \times \text{output current} ) / ( \text{input voltage} \times \text{input current} ) \} \times 100$

\*3: ON resistance ( ) =  $(V_{IN} - Lx \text{ pin measurement voltage}) / 100mA$

\*4: R&D value

\*5: When temperature is high, a current of approximately 10  $\mu A$  (maximum) may leak.

\*6: The CE/MODE pin of the XC9237A series works also as an external switching pin of PWM control and PWM/PFM control. When the IC is in the operation, control is switched to the automatic PWM/PFM switching mode when the CE/MODE pin voltage is equal to or greater than  $V_{IN}$  minus 0.3V, and to the PWM mode when the CE/MODE pin voltage is equal to or lower than  $V_{IN}$  minus 1.0V and equal to or greater than  $V_{CEH}$ .

\*7: Time until it short-circuits  $V_{OUT}$  with GND via 1 of resistor from an operational state and is set to  $LX=0V$  from current limit pulse generating.

\*8: When  $V_{IN}$  is less than 2.4V, limit current may not be reached because voltage falls caused by ON resistance.

\*9: When the difference between the input and the output is small, some cycles may be skipped completely before current maximizes. If current is further pulled from this state, output voltage will decrease because of P-ch driver ON resistance.

\*10: Current limit denotes the level of detection at peak of coil current.

\*11: "H"= $V_{IN}-V_{IN}-1.2V$ , "L"= $+0.1V \sim -0.1V$

\*12: XC9235 series exclude  $I_{PFM}$  and  $DTY_{LIMIT\_PFM}$  because those are only for the PFM control's functions.

\*13: XC9235/XC9236 series exclude  $V_{PWHM}$  and  $V_{PWML}$  because those are only for the XC9237 series' functions.

## ELECTRICAL CHARACTERISTICS (Continued)

XC9235B(C)(E)(G)18Cxx/XC9236B(C)(E)(G)18Cxx/XC9237B(C)(E)(G)18Cxx,  $V_{OUT}=1.8V$ ,  $f_{OSC}=1.2MHz$ ,  $T_a=25$

| PARAMETER                                       | SYMBOL                               | CONDITIONS   | MIN.            | TYP.      | MAX.           | UNIT    | CIRCUIT |
|---|--------------------------------------|--|-----------------|-----------|----------------|---------|---------|
| Output Voltage                                  | $V_{OUT}$                            | When connected to external components, $V_{IN}=V_{CE}=5.0V$ , $I_{OUT}=30mA$   | 1.764           | 1.800     | 1.836          | V       |         |
| Operating Voltage Range (B/C series)            | $V_{IN}$                             |  | 2.0             | -         | 6.0            | V       |         |
| Operating Voltage Range (E/G series)            |                                      |  | 1.8             | -         | 6.0            |         |         |
| Maximum Output Current                          | $I_{OUTMAX}$                         | $V_{IN}=V_{OUT(E)}+2.0V$ , $V_{CE}=1.0V$ ,<br>When connected to external components <sup>(9)</sup>   | 600             | -         | -              | mA      |         |
| UVLO Voltage                                    | $V_{UVLO}$                           | $V_{CE}=V_{IN}$ , $V_{OUT}=V_{OUT(E)} \times 0.5V$ <sup>(14)</sup><br>Voltage which Lx pin holding "L" level <sup>(11,11)</sup>                                    | 1.00            | 1.40      | 1.78           | V       |         |
| Supply Current                                  | $I_{DD}$                             | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 1.1V$  | -               | 15        | 33             | $\mu A$ |         |
| Stand-by Current                                | $I_{STB}$                            | $V_{IN}=5.0V$ , $V_{CE}=0V$ , $V_{OUT}=V_{OUT(E)} \times 1.1V$   | -               | 0         | 1.0            | $\mu A$ |         |
| Oscillation Frequency                           | $f_{OSC}$                            | When connected to external components,<br>$V_{IN}=V_{OUT(E)}+2.0V$ , $V_{CE}=1.0V$ , $I_{OUT}=100mA$   | 1020            | 1200      | 1380           | kHz     |         |
| PFM Switching Current                           | $I_{PFM}$                            | When connected to external components,<br>$V_{IN}=V_{OUT(E)}+2.0V$ , $V_{CE}=V_{IN}$ , $I_{OUT}=1mA$ <sup>(12)</sup>   | 120             | 160       | 200            | mA      |         |
| PFM Duty Limit                                  | $DTY_{LIMIT\_PFM}$                   | $V_{CE}=V_{IN}=(C-1)$ , $I_{OUT}=1mA$ <sup>(12)</sup>  |                 | 200       | 300            | %       |         |
| Maximum Duty Cycle                              | $DTY_{MAX}$                          | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 0.9V$  | 100             | -         | -              | %       |         |
| Minimum Duty Cycle                              | $DTY_{MIN}$                          | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 1.1V$  | -               | -         | 0              | %       |         |
| Efficiency <sup>(2)</sup>                       | EFFI                                 | When connected to external components,<br>$V_{CE}=V_{IN}=V_{OUT(E)}+1.2V$ , $I_{OUT}=100mA$  | -               | 92        | -              | %       |         |
| Lx SW "H" ON Resistance 1                       | $R_{LxH}$                            | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT(E)} \times 0.9V$ , $I_{Lx}=100mA$ <sup>(3)</sup>  | -               | 0.35      | 0.55           |         |         |
| Lx SW "H" ON Resistance 2                       | $R_{LxH}$                            | $V_{IN}=V_{CE}=3.6V$ , $V_{OUT(E)} \times 0.9V$ , $I_{Lx}=100mA$ <sup>(3)</sup>  | -               | 0.42      | 0.67           |         |         |
| Lx SW "L" ON Resistance 1                       | $R_{LxL}$                            | $V_{IN}=V_{CE}=5.0V$ <sup>(4)</sup>  | -               | 0.45      | 0.65           |         |         |
| Lx SW "L" ON Resistance 2                       | $R_{LxL}$                            | $V_{IN}=V_{CE}=3.6V$ <sup>(4)</sup>  | -               | 0.52      | 0.77           |         | -       |
| Lx SW "H" Leak Current <sup>(5)</sup>           | $I_{LEAKH}$                          | $V_{IN}=V_{OUT}=5.0V$ , $V_{CE}=0V$ , $Lx=0V$  | -               | 0.01      | 1.0            | $\mu A$ |         |
| Current Limit <sup>(10)</sup>                   | $I_{LIM}$                            | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 0.9V$ <sup>(8)</sup>   | 900             | 1050      | 1350           | mA      |         |
| Output Voltage Temperature Characteristics      | $\frac{V_{OUT}}{V_{OUT} \cdot Topr}$ | $I_{OUT}=30mA$ , -40 Topr 85   | -               | $\pm 100$ | -              | ppm/    |         |
| CE "H" Voltage                                  | $V_{CEH}$                            | $V_{OUT}=V_{OUT(E)} \times 0.9V$ , Applied voltage to $V_{CE}$ ,<br>Voltage changes Lx to "H" level <sup>(11)</sup>  | 0.65            | -         | 6.0            | V       |         |
| CE "L" Voltage                                  | $V_{CEL}$                            | $V_{OUT}=V_{OUT(E)} \times 0.9V$ , Applied voltage to $V_{CE}$ ,<br>Voltage changes Lx to "L" level <sup>(11)</sup>  | $V_{SS}$        | -         | 0.25           | V       |         |
| PWM "H" Level Voltage                           | $V_{PWMH}$                           | When connected to external components,<br>$I_{OUT}=1mA$ <sup>(6)</sup> , Voltage which oscillation frequency<br>becomes 1020 kHz $f_{OSC}$ 1380kHz <sup>(13)</sup> | -               | -         | $V_{IN} - 1.0$ | V       |         |
| PWM "L" Level Voltage                           | $V_{PWML}$                           | When connected to external components,<br>$I_{OUT}=1mA$ <sup>(6)</sup> , Voltage which oscillation frequency<br>becomes $f_{OSC} < 1020kHz$ <sup>(13)</sup>        | $V_{IN} - 0.25$ | -         | -              | V       |         |
| CE "H" Current                                  | $I_{CEH}$                            | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 0.9V$  | - 0.1           | -         | 0.1            | $\mu A$ |         |
| CE "L" Current                                  | $I_{CEL}$                            | $V_{IN}=5.0V$ , $V_{CE}=0V$ , $V_{OUT}=V_{OUT(E)} \times 0.9V$   | - 0.1           | -         | 0.1            | $\mu A$ |         |
| Soft Start Time (B/G Series)                    | $t_{SS}$                             | When connected to external components,<br>$V_{CE}=0V$ $V_{IN}$ , $I_{OUT}=1mA$   | -               | 0.25      | 0.40           | ms      |         |
| Soft Start Time (C/E Series)                    | $t_{SS}$                             | When connected to external components,<br>$V_{CE}=0V$ $V_{IN}$ , $I_{OUT}=1mA$   | 0.5             | 1.0       | 2.5            | ms      |         |
| Latch Time                                      | $t_{LAT}$                            | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=0.8 \times V_{OUT(E)}$ ,<br>Short Lx at 1 resistance <sup>(7)</sup>  | 1.0             | -         | 20.0           | ms      |         |
| Short Protection Threshold Voltage (B/C Series) | $V_{SHORT}$                          | Sweeping $V_{OUT}$ , $V_{IN}=V_{CE}=5.0V$ , Short Lx at<br>1 resistance, $V_{OUT}$ voltage which Lx becomes<br>"L" level within 1ms                                | 0.675           | 0.900     | 1.150          | V       |         |
| Short Protection Threshold Voltage (E/G Series) | $V_{SHORT}$                          | $V_{IN}=V_{CE}=5.0V$ , The $V_{OUT}$ at Lx="Low" <sup>(11)</sup> while<br>decreasing $V_{OUT}$ from $V_{OUT(E)} \times 0.4V$                                       | 0.338           | 0.450     | 0.563          | V       |         |
| $C_L$ Discharge                                 | $R_{DCHG}$                           | $V_{IN}=5.0V$ , $Lx=5.0V$ , $V_{CE}=0V$ , $V_{OUT}=open$   | 200             | 300       | 450            |         |         |

Test conditions: Unless otherwise stated,  $V_{IN}=5.0V$ ,  $V_{OUT(E)}$ =Nominal Voltage, applied voltage sequence is  $V_{OUT}$   $V_{IN}$   $V_{CE}$

NOTE:

- \*1: Including hysteresis operating voltage range.
- \*2:  $EFFI = \{ ( \text{output voltage} \times \text{output current} ) / ( \text{input voltage} \times \text{input current} ) \} \times 100$
- \*3: ON resistance ( ) =  $(V_{IN} - Lx \text{ pin measurement voltage}) / 100mA$
- \*4: R&D value
- \*5: When temperature is high, a current of approximately  $10 \mu A$  (maximum) may leak.
- \*6: The CE/MODE pin of the XC9237A series works also as an external switching pin of PWM control and PWM/PFM control. When the IC is in the operation, control is switched to the automatic PWM/PFM switching mode when the CE/MODE pin voltage is equal to or greater than  $V_{IN}$  minus 0.3V, and to the PWM mode when the CE/MODE pin voltage is equal to or lower than  $V_{IN}$  minus 1.0V and equal to or greater than  $V_{CEH}$ .
- \*7: Time until it short-circuits  $V_{OUT}$  with GND via 1 of resistor from an operational state and is set to  $Lx=0V$  from current limit pulse generating.
- \*8: When  $V_{IN}$  is less than 2.4V, limit current may not be reached because voltage falls caused by ON resistance.
- \*9: When the difference between the input and the output is small, some cycles may be skipped completely before current maximizes.  
If current is further pulled from this state, output voltage will decrease because of P-ch driver ON resistance.
- \*10: Current limit denotes the level of detection at peak of coil current.
- \*11: "H"= $V_{IN}-V_{IN}-1.2V$ , "L"= $+0.1V \sim -0.1V$
- \*12: XC9235 series exclude  $I_{PFM}$  and  $DTY_{LIMIT\_PFM}$  because those are only for the PFM control's functions.
- \*13: XC9235/XC9236 series exclude  $V_{PWMH}$  and  $V_{PWML}$  because those are only for the XC9237 series' functions.
- \*14:  $V_{IN}$  is applied when  $V_{OUT(E)} \times 0.5V$  becomes more than  $V_{IN}$ .

# XC9235/XC9236/XC9237 Series

## ELECTRICAL CHARACTERISTICS (Continued)

XC9235B(C)(E)(G)18Dxx/XC9236B(C)(E)(G)18Dxx/XC9237B(C)(E)(G)18Dxx,  $V_{OUT}=1.8V$ ,  $f_{OSC}=3.0MHz$ ,  $T_a=25$

| PARAMETER                                       | SYMBOL                                  | CONDITIONS  | MIN.            | TYP.      | MAX.           | UNIT    | CIRCUIT |
|---|---|---|-----------------|-----------|----------------|---------|---------|
| Output Voltage                                  | $V_{OUT}$                               | When connected to external components, $V_{IN}=V_{CE}=5.0V$ , $I_{OUT}=30mA$  | 1.764           | 1.800     | 1.836          | V       |         |
| Operating Voltage Range (B/C series)            | $V_{IN}$                                | When connected to external components   | 2.0             | -         | 6.0            | V       |         |
| Operating Voltage Range (E/G series)            |   |   | 1.8             | -         | 6.0            |         |         |
| Maximum Output Current                          | $I_{OUTMAX}$                            | $V_{IN}=V_{OUT(E)}+2.0V$ , $V_{CE}=1.0V$ ,<br>When connected to external components <sup>(9)</sup>  | 600             | -         | -              | mA      |         |
| UVLO Voltage                                    | $V_{UVLO}$                              | $V_{CE}=V_{IN}$ , $V_{OUT}=V_{OUT(E)} \times 0.5V$ <sup>(14)</sup> ,<br>Voltage which Lx pin holding "L" level <sup>(1,11)</sup>                                  | 1.00            | 1.40      | 1.78           | V       |         |
| Supply Current                                  | $I_{DD}$                                | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 1.1V$   | -               | 21        | 35             | $\mu A$ |         |
| Stand-by Current                                | $I_{STB}$                               | $V_{IN}=5.0V$ , $V_{CE}=0V$ , $V_{OUT}=V_{OUT(E)} \times 1.1V$  | -               | 0         | 1.0            | $\mu A$ |         |
| Oscillation Frequency                           | $f_{OSC}$                               | When connected to external components,<br>$V_{IN}=V_{OUT(E)}+2.0V$ , $V_{CE}=1.0V$ , $I_{OUT}=100mA$  | 2550            | 3000      | 3450           | kHz     |         |
| PFM Switching Current                           | $I_{PFM}$                               | When connected to external components,<br>$V_{IN}=V_{OUT(E)}+2.0V$ , $V_{CE}=V_{IN}$ , $I_{OUT}=1mA$ <sup>(12)</sup>  | 170             | 220       | 270            | mA      |         |
| PFM Duty Limit                                  | $DTY_{LIMIT\_PFM}$                      | $V_{CE}=V_{IN}=(C-1)$ , $I_{OUT}=1mA$ <sup>(12)</sup>   | -               | 200       | 300            | %       |         |
| Maximum Duty Cycle                              | $DTY_{MAX}$                             | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 0.9V$   | 100             | -         | -              | %       |         |
| Minimum Duty Cycle                              | $DTY_{MIN}$                             | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 0.1V$   | -               | -         | 0              | %       |         |
| Efficiency <sup>(2)</sup>                       | EFFI                                    | When connected to external components,<br>$V_{CE}=V_{IN}=V_{OUT(E)}+1.2V$ , $I_{OUT}=100mA$   | -               | 86        | -              | %       |         |
| Lx SW "H" ON Resistance 1                       | $R_{LXH}$                               | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 0.9V$ , $I_{LX}=100mA$ <sup>(3)</sup>   | -               | 0.35      | 0.55           |         |         |
| Lx SW "H" ON Resistance 2                       | $R_{LXH}$                               | $V_{IN}=V_{CE}=3.6V$ , $V_{OUT}=V_{OUT(E)} \times 0.9V$ , $I_{LX}=100mA$ <sup>(3)</sup>   | -               | 0.42      | 0.67           |         |         |
| Lx SW "L" ON Resistance 1                       | $R_{LXL}$                               | $V_{IN}=V_{CE}=5.0V$ <sup>(4)</sup>   | -               | 0.45      | 0.65           |         | -       |
| Lx SW "L" ON Resistance 2                       | $R_{LXL}$                               | $V_{IN}=V_{CE}=3.6V$ <sup>(4)</sup>   | -               | 0.52      | 0.77           |         | -       |
| Lx SW "H" Leak Current <sup>(5)</sup>           | $I_{LEAKH}$                             | $V_{IN}=V_{OUT}=5.0V$ , $V_{CE}=0V$ , $Lx=0V$   | -               | 0.01      | 1.0            | $\mu A$ |         |
| Current Limit <sup>(10)</sup>                   | $I_{LIM}$                               | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 0.9V$ <sup>(8)</sup>  | 900             | 1050      | 1350           | mA      |         |
| Output Voltage Temperature Characteristics      | $\frac{V_{OUT}}{V_{OUT} \cdot T_{opr}}$ | $I_{OUT}=30mA$ , -40 $T_{opr}$ 85   | -               | $\pm 100$ | -              | ppm/    |         |
| CE "H" Voltage                                  | $V_{CEH}$                               | $V_{OUT}=V_{OUT(E)} \times 0.9V$ , Applied voltage to $V_{CE}$ ,<br>Voltage changes Lx to "H" level <sup>(11)</sup>   | 0.65            | -         | 6.0            | V       |         |
| CE "L" Voltage                                  | $V_{CEL}$                               | $V_{OUT}=V_{OUT(E)} \times 0.9V$ , Applied voltage to $V_{CE}$ ,<br>Voltage changes Lx to "L" level <sup>(11)</sup>   | $V_{SS}$        | -         | 0.25           | V       |         |
| PWM "H" Level Voltage                           | $V_{PWHM}$                              | When connected to external components,<br>$I_{OUT}=1mA$ <sup>(6)</sup> , Voltage which oscillation frequency<br>becomes 2550kHz $f_{OSC}$ 3450kHz <sup>(13)</sup> | -               | -         | $V_{IN} - 1.0$ | V       |         |
| PWM "L" Level Voltage                           | $V_{PWML}$                              | When connected to external components,<br>$I_{OUT}=1mA$ <sup>(6)</sup> , Voltage which oscillation frequency<br>becomes $f_{OSC} < 2550kHz$ <sup>(13)</sup>       | $V_{IN} - 0.25$ | -         | -              | V       |         |
| CE "H" Current                                  | $I_{CEH}$                               | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=V_{OUT(E)} \times 0.9V$   | -0.1            | -         | 0.1            | $\mu A$ |         |
| CE "L" Current                                  | $I_{CEL}$                               | $V_{IN}=5.0V$ , $V_{CE}=0V$ , $V_{OUT}=V_{OUT(E)} \times 0.9V$  | -0.1            | -         | 0.1            | $\mu A$ |         |
| Soft Start Time (B/G Series)                    | $t_{SS}$                                | When connected to external components,<br>$V_{CE}=0V$ $V_{IN}$ , $I_{OUT}=1mA$  | -               | 0.32      | 0.50           | ms      |         |
| Soft Start Time (C/E Series)                    | $t_{SS}$                                | When connected to external components,<br>$V_{CE}=0V$ $V_{IN}$ , $I_{OUT}=1mA$  | 0.5             | 0.9       | 2.5            | ms      |         |
| Latch Time                                      | $t_{LAT}$                               | $V_{IN}=V_{CE}=5.0V$ , $V_{OUT}=0.8 \times V_{OUT(E)}$ ,<br>Short Lx at 1 $\Omega$ resistance <sup>(7)</sup>  | 1.0             | -         | 20             | ms      |         |
| Short Protection Threshold Voltage (B/C Series) | $V_{SHORT}$                             | Sweeping $V_{OUT}$ , $V_{IN}=V_{CE}=5.0V$ , Short Lx at<br>1 $\Omega$ resistance, $V_{OUT}$ voltage which Lx becomes<br>"L" level within 1ms                      | 0.675           | 0.900     | 1.150          | V       |         |
| Short Protection Threshold Voltage (E/G Series) | $V_{SHORT}$                             | $V_{IN}=V_{CE}=5.0V$ , The $V_{OUT}$ at Lx="Low" <sup>(11)</sup> while<br>decreasing $V_{OUT}$ from $V_{OUT(E)} \times 0.4V$                                      | 0.338           | 0.450     | 0.563          | V       |         |
| $C_L$ Discharge                                 | $R_{DCHG}$                              | $V_{IN}=5.0V$ , $Lx=5.0V$ , $V_{CE}=0V$ , $V_{OUT}=open$  | 200             | 300       | 450            |         |         |

Test conditions: Unless otherwise stated,  $V_{IN}=5.0V$ ,  $V_{OUT(E)}$ =Nominal Voltage, applied voltage sequence is  $V_{OUT}$   $V_{IN}$   $V_{CE}$

NOTE:

- \*1: Including hysteresis operating voltage range.
- \*2:  $EFFI = \{ (\text{output voltage} \times \text{output current}) / (\text{input voltage} \times \text{input current}) \} \times 100$
- \*3: ON resistance (  $\Omega$  ) =  $(V_{IN} - Lx \text{ pin measurement voltage}) / 100mA$
- \*4: R&D value
- \*5: When temperature is high, a current of approximately 10  $\mu A$  (maximum) may leak.
- \*6: The CE/MODE pin of the XC9237A series works also as an external switching pin of PWM control and PWM/PFM control. When the IC is in the operation, control is switched to the automatic PWM/PFM switching mode when the CE/MODE pin voltage is equal to or greater than  $V_{IN}$  minus 0.3V, and to the PWM mode when the CE/MODE pin voltage is equal to or lower than  $V_{IN}$  minus 1.0V and equal to or greater than  $V_{CEH}$ .
- \*7: Time until it short-circuits  $V_{OUT}$  with GND via 1  $\Omega$  resistor from an operational state and is set to Lx=0V from current limit pulse generating.
- \*8: When  $V_{IN}$  is less than 2.4V, limit current may not be reached because voltage falls caused by ON resistance.
- \*9: When the difference between the input and the output is small, some cycles may be skipped completely before current maximizes. If current is further pulled from this state, output voltage will decrease because of P-ch driver ON resistance.
- \*10: Current limit denotes the level of detection at peak of coil current.
- \*11: "H"= $V_{IN}-V_{IN}-1.2V$ , "L"= $+0.1V \sim -0.1V$
- \*12: XC9235 series exclude  $I_{PFM}$  and  $DTY_{LIMIT\_PFM}$  because those are only for the PFM control's functions.
- \*13: XC9235/XC9236 series exclude  $V_{PWHM}$  and  $V_{PWML}$  because those are only for the XC9237 series' functions.
- \*14:  $V_{IN}$  is applied when  $V_{OUT(E)} \times 0.5V$  becomes more than  $V_{IN}$ .

## ELECTRICAL CHARACTERISTICS (Continued)

XC9235D(F)08Cxx/XC9236D(F)08Cxx/XC9237D(F)08Cxx, FB Type, f<sub>OSC</sub>=1.2MHz, Ta=25

| PARAMETER                                  | SYMBOL                                       | CONDITIONS   | MIN.                   | TYP.  | MAX.                  | UNIT | CIRCUIT |
|--|--|--|------------------------|-------|-----------------------|------|---------|
| FB Voltage                                 | V <sub>FB</sub>                              | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, The V <sub>FB</sub> at Lx="High" <sup>(11)</sup> while decreasing FB pin voltage from 0.9V.  | 0.784                  | 0.800 | 0.816                 | V    |         |
| Operating Voltage Range                    | V <sub>IN</sub>                              |  | 1.8                    | -     | 6.0                   | V    |         |
| Maximum Output Current                     | I <sub>OUTMAX</sub>                          | V <sub>IN</sub> =3.2V, V <sub>CE</sub> =1.0V<br>When connected to external components <sup>(9)</sup>   | 600                    | -     | -                     | mA   |         |
| UVLO Voltage                               | V <sub>UVLO</sub>                            | V <sub>CE</sub> = V <sub>IN</sub> , V <sub>FB</sub> = 0.4V,<br>Voltage which Lx pin holding "L" level <sup>(1,11)</sup>  | 1.00                   | 1.40  | 1.78                  | V    |         |
| Supply Current                             | I <sub>DD</sub>                              | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, V <sub>FB</sub> = 0.88V  | -                      | 15    | -                     | μA   |         |
| Stand-by Current                           | I <sub>STB</sub>                             | V <sub>IN</sub> = 5.0V, V <sub>CE</sub> = 0V, V <sub>FB</sub> = 0.88V  | -                      | 0     | 1.0                   | μA   |         |
| Oscillation Frequency                      | f <sub>OSC</sub>                             | When connected to external components,<br>V <sub>IN</sub> = 3.2V, V <sub>CE</sub> = 1.0V, I <sub>OUT</sub> = 100mA   | 1020                   | 1200  | 1380                  | kHz  |         |
| PFM Switching Current                      | I <sub>PFM</sub>                             | When connected to external components,<br>V <sub>IN</sub> = 3.2V, V <sub>CE</sub> = V <sub>IN</sub> , I <sub>OUT</sub> = 1mA <sup>(12)</sup>                                   | 120                    | 160   | 200                   | mA   |         |
| PFM Duty Limit                             | DTY <sub>LIMIT_PFM</sub>                     | V <sub>CE</sub> = V <sub>IN</sub> = 2.0V, I <sub>OUT</sub> = 1mA <sup>(12)</sup>   | -                      | 200   | 300                   | %    |         |
| Maximum Duty Cycle                         | DTY <sub>MAX</sub>                           | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, V <sub>FB</sub> = 0.72V  | 100                    | -     | -                     | %    |         |
| Minimum Duty Cycle                         | DTY <sub>MIN</sub>                           | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, V <sub>FB</sub> = 0.88V  | -                      | -     | 0                     | %    |         |
| Efficiency <sup>(2)</sup>                  | EFFI   | When connected to external components,<br>V <sub>CE</sub> = V <sub>IN</sub> = 2.4V, I <sub>OUT</sub> = 100mA   | -                      | 92    | -                     | %    |         |
| Lx SW "H" ON Resistance 1                  | R <sub>LxH</sub>                             | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, V <sub>FB</sub> = 0.72V, I <sub>Lx</sub> = 100mA <sup>(3)</sup>  | -                      | 0.35  | 0.55                  |      |         |
| Lx SW "H" ON Resistance 2                  | R <sub>LxH</sub>                             | V <sub>IN</sub> = V <sub>CE</sub> = 3.6V, V <sub>FB</sub> = 0.72V, I <sub>Lx</sub> = 100mA <sup>(3)</sup>  | -                      | 0.42  | 0.67                  |      |         |
| Lx SW "L" ON Resistance 1                  | R <sub>LxL</sub>                             | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V <sup>(4)</sup>  | -                      | 0.45  | 0.65                  |      | -       |
| Lx SW "L" ON Resistance 2                  | R <sub>LxL</sub>                             | V <sub>IN</sub> = V <sub>CE</sub> = 3.6V <sup>(4)</sup>  | -                      | 0.52  | 0.77                  |      | -       |
| Lx SW "H" Leak Current <sup>(5)</sup>      | I <sub>LEAKH</sub>                           | V <sub>IN</sub> = V <sub>FB</sub> = 5.0V, V <sub>CE</sub> = 0V, Lx = 0V  | -                      | 0.01  | 1.0                   | μA   |         |
| Current Limit <sup>(10)</sup>              | I <sub>LIM</sub>                             | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, V <sub>FB</sub> = 0.72V <sup>(8)</sup>   | 900                    | 1050  | 1350                  | mA   |         |
| Output Voltage Temperature Characteristics | V <sub>OUT</sub> / (V <sub>OUT</sub> · Topr) | I <sub>OUT</sub> = 30mA<br>-40 Topr 85   | -                      | ± 100 | -                     | ppm/ |         |
| CE "H" Voltage                             | V <sub>CEH</sub>                             | V <sub>FB</sub> = 0.72V, Applied voltage to V <sub>CE</sub> ,<br>Voltage changes Lx to "H" level <sup>(11)</sup>   | 0.65                   | -     | 6.0                   | V    |         |
| CE "L" Voltage                             | V <sub>CEL</sub>                             | V <sub>FB</sub> = 0.72V, Applied voltage to V <sub>CE</sub> ,<br>Voltage changes Lx to "L" level <sup>(11)</sup>   | V <sub>SS</sub>        | -     | 0.25                  | V    |         |
| PWM "H" Level Voltage                      | V <sub>PWMH</sub>                            | When connected to external components,<br>I <sub>OUT</sub> = 1mA <sup>(6)</sup> , Voltage which oscillation frequency becomes 1020kHz f <sub>OSC</sub> 1380kHz <sup>(13)</sup> | -                      | -     | V <sub>IN</sub> - 1.0 | V    |         |
| PWM "L" Level Voltage                      | V <sub>PWML</sub>                            | When connected to external components,<br>I <sub>OUT</sub> = 1mA <sup>(6)</sup> , Voltage which oscillation frequency becomes f <sub>OSC</sub> < 1020kHz <sup>(13)</sup>       | V <sub>IN</sub> - 0.25 | -     | -                     | V    |         |
| CE "H" Current                             | I <sub>CEH</sub>                             | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, V <sub>FB</sub> = 0.72V  | - 0.1                  | -     | 0.1                   | μA   |         |
| CE "L" Current                             | I <sub>CEL</sub>                             | V <sub>IN</sub> = 5.0V, V <sub>CE</sub> = 0V, V <sub>FB</sub> = 0.72V  | - 0.1                  | -     | 0.1                   | μA   |         |
| Soft Start Time (D series)                 | t <sub>SS</sub>                              | When connected to external components,<br>V <sub>CE</sub> = 0V V <sub>IN</sub> , I <sub>OUT</sub> = 1mA  | 0.5                    | 1.0   | 2.5                   | ms   |         |
| Soft Start Time (F series)                 |  |  | -                      | 0.25  | 0.40                  |      |         |
| Latch Time                                 | t <sub>LAT</sub>                             | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, V <sub>FB</sub> = 0.64, Short Lx at 1 resistance <sup>(7)</sup>  | 1.0                    | -     | 20.0                  | ms   |         |
| Short Protection Threshold Voltage         | V <sub>SHORT</sub>                           | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, The V <sub>FB</sub> at Lx="Low" <sup>(11)</sup> while decreasing FB pin voltage from 0.4V.   | 0.15                   | 0.200 | 0.25                  | V    |         |
| C <sub>L</sub> Discharge                   | R <sub>DCHG</sub>                            | V <sub>IN</sub> = 5.0V, Lx = 5.0V, V <sub>CE</sub> = 0V, V <sub>FB</sub> = open  | 200                    | 300   | 450                   |      |         |

Test conditions: V<sub>OUT</sub> = 1.2V when the external components are connected. Unless otherwise stated, V<sub>IN</sub> = 5.0V, V<sub>OUT(E)</sub> = Nominal Voltage, applied voltage sequence is V<sub>OUT</sub> V<sub>IN</sub> V<sub>CE</sub>

NOTE:

- \*1: Including hysteresis operating voltage range.
- \*2: EFFI = { ( output voltage x output current ) / ( input voltage x input current ) } x 100
- \*3: ON resistance ( ) = (V<sub>IN</sub> - Lx pin measurement voltage) / 100mA
- \*4: R&D value
- \*5: When temperature is high, a current of approximately 10 μA (maximum) may leak.
- \*6: The CE/MODE pin of the XC9237A series works also as an external switching pin of PWM control and PWM/PFM control. When the IC is in the operation, control is switched to the automatic PWM/PFM switching mode when the CE/MODE pin voltage is equal to or greater than V<sub>IN</sub> minus 0.3V, and to the PWM mode when the CE/MODE pin voltage is equal to or lower than V<sub>IN</sub> minus 1.0V and equal to or greater than V<sub>CEH</sub>.
- \*7: Time until it short-circuits V<sub>FB</sub> with GND via 1 of resistor from an operational state and is set to Lx=0V from current limit pulse generating.
- \*8: When V<sub>IN</sub> is less than 2.4V, limit current may not be reached because voltage falls caused by ON resistance.
- \*9: When the difference between the input and the output is small, some cycles may be skipped completely before current maximizes. If current is further pulled from this state, output voltage will decrease because of P-ch driver ON resistance.
- \*10: Current limit denotes the level of detection at peak of coil current.
- \*11: "H" = V<sub>IN</sub> - V<sub>IN</sub> - 1.2V, "L" = +0.1V ~ -0.1V
- \*12: XC9235 series exclude I<sub>PFM</sub> and DTY<sub>LIMIT\_PFM</sub> because those are only for the PFM control's functions.
- \*13: XC9235/XC9236 series exclude V<sub>PWMH</sub> and V<sub>PWML</sub> because those are only for the XC9237 series' functions.

# XC9235/XC9236/XC9237 Series

## ELECTRICAL CHARACTERISTICS (Continued)

XC9235D(F)08Dxx/XC9236D(F)08Dxx/XC9237D(F)08Dxx, FB, f<sub>OSC</sub>=3.0MHz, Ta=25

| PARAMETER                                  | SYMBOL                                       | CONDITIONS   | MIN.                   | TYP.  | MAX.                  | UNIT | CIRCUIT |
|--|--|--|------------------------|-------|-----------------------|------|---------|
| FB Voltage                                 | V <sub>FB</sub>                              | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, The V <sub>FB</sub> at Lx="High" <sup>(11)</sup> while decreasing FB pin voltage from 0.9V.  | 0.784                  | 0.800 | 0.816                 | V    |         |
| Operating Voltage Range                    | V <sub>IN</sub>                              |  | 1.8                    | -     | 6.0                   | V    |         |
| Maximum Output Current                     | I <sub>OUTMAX</sub>                          | V <sub>IN</sub> =3.2V, V <sub>CE</sub> =1.0V<br>When connected to external components <sup>(9)</sup>   | 600                    | -     | -                     | mA   |         |
| UVLO Voltage                               | V <sub>UVLO</sub>                            | V <sub>CE</sub> = V <sub>IN</sub> , V <sub>FB</sub> = 0.4V,<br>Voltage which Lx pin holding "L" level <sup>(1, 11)</sup>   | 1.00                   | 1.40  | 1.78                  | V    |         |
| Supply Current                             | I <sub>DD</sub>                              | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, V <sub>FB</sub> = 0.88V  | -                      | 21    | 35                    | μA   |         |
| Stand-by Current                           | I <sub>STB</sub>                             | V <sub>IN</sub> = 5.0V, V <sub>CE</sub> = 0V, V <sub>FB</sub> = 0.88V  | -                      | 0     | 1.0                   | μA   |         |
| Oscillation Frequency                      | f <sub>OSC</sub>                             | When connected to external components,<br>V <sub>IN</sub> = 3.2V, V <sub>CE</sub> = 1.0V, I <sub>OUT</sub> = 100mA   | 2550                   | 3000  | 3450                  | kHz  |         |
| PFM Switching Current                      | I <sub>PFM</sub>                             | When connected to external components,<br>V <sub>IN</sub> = 3.2V, V <sub>CE</sub> = V <sub>IN</sub> , I <sub>OUT</sub> = 1mA <sup>(12)</sup>                                   | 170                    | 220   | 270                   | mA   |         |
| PFM Duty Limit                             | DTY <sub>LIMIT_PFM</sub>                     | V <sub>CE</sub> = V <sub>IN</sub> = 2.2V, I <sub>OUT</sub> = 1mA <sup>(12)</sup>   |                        | 200   | 300                   | %    |         |
| Maximum Duty Cycle                         | DTY <sub>MAX</sub>                           | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, V <sub>FB</sub> = 0.72V  | 100                    | -     | -                     | %    |         |
| Minimum Duty Cycle                         | DTY <sub>MIN</sub>                           | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, V <sub>FB</sub> = 0.88V  | -                      | -     | 0                     | %    |         |
| Efficiency <sup>(2)</sup>                  | EFFI   | When connected to external components,<br>V <sub>CE</sub> = V <sub>IN</sub> = 2.4V, I <sub>OUT</sub> = 100mA   | -                      | 86    | -                     | %    |         |
| Lx SW "H" ON Resistance 1                  | R <sub>LxH</sub>                             | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, V <sub>FB</sub> = 0.72V, I <sub>Lx</sub> = 100mA <sup>(3)</sup>  | -                      | 0.35  | 0.55                  |      |         |
| Lx SW "H" ON Resistance 2                  | R <sub>LxH</sub>                             | V <sub>IN</sub> = V <sub>CE</sub> = 3.6V, V <sub>FB</sub> = 0.72V, I <sub>Lx</sub> = 100mA <sup>(3)</sup>  | -                      | 0.42  | 0.67                  |      |         |
| Lx SW "L" ON Resistance 1                  | R <sub>LxL</sub>                             | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V <sup>(4)</sup>  | -                      | 0.45  | 0.65                  |      | -       |
| Lx SW "L" ON Resistance 2                  | R <sub>LxL</sub>                             | V <sub>IN</sub> = V <sub>CE</sub> = 3.6V <sup>(4)</sup>  | -                      | 0.52  | 0.77                  |      | -       |
| Lx SW "H" Leak Current <sup>(5)</sup>      | I <sub>LEAKH</sub>                           | V <sub>IN</sub> = V <sub>FB</sub> = 5.0V, V <sub>CE</sub> = 0V, Lx = 0V  | -                      | 0.01  | 1.0                   | μA   |         |
| Current Limit <sup>(10)</sup>              | I <sub>LIM</sub>                             | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, V <sub>FB</sub> = 0.72V <sup>(8)</sup>   | 900                    | 1050  | 1350                  | mA   |         |
| Output Voltage Temperature Characteristics | V <sub>OUT</sub> / (V <sub>OUT</sub> · Topr) | I <sub>OUT</sub> = 30mA<br>-40 Topr 85   | -                      | ± 100 | -                     | ppm/ |         |
| CE "H" Voltage                             | V <sub>CEH</sub>                             | V <sub>FB</sub> = 0.72V, V <sub>CE</sub> ,<br>Voltage changes Lx to "H" level <sup>(11)</sup>  | 0.65                   | -     | 6.0                   | V    |         |
| CE "L" Voltage                             | V <sub>CEL</sub>                             | V <sub>FB</sub> = 0.72V, V <sub>CE</sub> ,<br>Voltage changes Lx to "L" level <sup>(11)</sup>  | V <sub>SS</sub>        | -     | 0.25                  | V    |         |
| PWM "H" Level Voltage                      | V <sub>PWMH</sub>                            | When connected to external components,<br>I <sub>OUT</sub> = 1mA <sup>(6)</sup> , Voltage which oscillation frequency becomes 2550kHz f <sub>OSC</sub> 3450kHz <sup>(13)</sup> | -                      | -     | V <sub>IN</sub> - 1.0 | V    |         |
| PWM "L" Level Voltage                      | V <sub>PWML</sub>                            | When connected to external components,<br>I <sub>OUT</sub> = 1mA <sup>(6)</sup> , Voltage which oscillation frequency becomes f <sub>OSC</sub> < 2550kHz <sup>(13)</sup>       | V <sub>IN</sub> - 0.25 | -     | -                     | V    |         |
| CE "H" Current                             | I <sub>CEH</sub>                             | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, V <sub>FB</sub> = 0.72V  | - 0.1                  | -     | 0.1                   | μA   |         |
| CE "L" Current                             | I <sub>CEL</sub>                             | V <sub>IN</sub> = 5.0V, V <sub>CE</sub> = 0V, V <sub>FB</sub> = 0.72V  | - 0.1                  | -     | 0.1                   | μA   |         |
| Soft Start Time (D series)                 | t <sub>SS</sub>                              | When connected to external components,<br>V <sub>CE</sub> = 0V V <sub>IN</sub> , I <sub>OUT</sub> = 1mA  | 0.5                    | 1.0   | 2.5                   | ms   |         |
| Soft Start Time (F series)                 |  |  | -                      | 0.25  | 0.40                  |      |         |
| Latch Time                                 | t <sub>LAT</sub>                             | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, V <sub>FB</sub> = 0.64,<br>Short Lx at 1 resistance <sup>(7)</sup>   | 1.0                    | -     | 20.0                  | ms   |         |
| Short Protection Threshold Voltage         | V <sub>SHORT</sub>                           | V <sub>IN</sub> = V <sub>CE</sub> = 5.0V, The V <sub>FB</sub> at Lx="Low" <sup>(11)</sup> while decreasing FB pin voltage from 0.4V.   | 0.15                   | 0.200 | 0.25                  | V    |         |
| C <sub>L</sub> Discharge                   | R <sub>DCHG</sub>                            | V <sub>IN</sub> = 5.0V, Lx = 5.0V, V <sub>CE</sub> = 0V, V <sub>FB</sub> = open  | 200                    | 300   | 450                   |      |         |

Test conditions: V<sub>OUT</sub>=1.2V when the external components are connected. Unless otherwise stated, V<sub>IN</sub>=5.0V, V<sub>OUT(E)</sub>=Nominal Voltage, applied voltage sequence is V<sub>OUT</sub> V<sub>IN</sub> V<sub>CE</sub>

NOTE:

- \*1: Including hysteresis operating voltage range.
- \*2: EFFI = { ( output voltage × output current ) / ( input voltage × input current ) } × 100
- \*3: ON resistance ( ) = (V<sub>IN</sub> - Lx pin measurement voltage) / 100mA
- \*4: R&D value
- \*5: When temperature is high, a current of approximately 10 μA (maximum) may leak.
- \*6: The CE/MODE pin of the XC9237A series works also as an external switching pin of PWM control and PWM/PFM control. When the IC is in the operation, control is switched to the automatic PWM/PFM switching mode when the CE/MODE pin voltage is equal to or greater than V<sub>IN</sub> minus 0.3V, and to the PWM mode when the CE/MODE pin voltage is equal to or lower than V<sub>IN</sub> minus 1.0V and equal to or greater than V<sub>CEH</sub>.
- \*7: Time until it short-circuits V<sub>FB</sub> with GND via 1 of resistor from an operational state and is set to Lx=0V from current limit pulse generating.
- \*8: When V<sub>IN</sub> is less than 2.4V, limit current may not be reached because voltage falls caused by ON resistance.
- \*9: When the difference between the input and the output is small, some cycles may be skipped completely before current maximizes. If current is further pulled from this state, output voltage will decrease because of P-ch driver ON resistance.
- \*10: Current limit denotes the level of detection at peak of coil current.
- \*11: "H"=V<sub>IN</sub>-V<sub>IN</sub>-1.2V, "L"=+0.1V~-0.1V
- \*12: XC9235 series exclude I<sub>PFM</sub> and DTY<sub>LIMIT\_PFM</sub> because those are only for the PFM control's functions.
- \*13: XC9235/XC9236 series exclude V<sub>PWMH</sub> and V<sub>PWML</sub> because those are only for the XC9237 series' functions.

## ELECTRICAL CHARACTERISTICS (Continued)

PFM Switching Current ( $I_{PFM}$ ) by Oscillation Frequency and Setting Voltage

(mA)

| SETTING VOLTAGE             | 1.2MHz |      |      | 3.0MHz |      |      |
|-----------------------------|--------|------|------|--------|------|------|
|                             | MIN.   | TYP. | MAX. | MIN.   | TYP. | MAX. |
| $V_{OUT(E)} = 1.2V$         | 140    | 180  | 240  | 190    | 260  | 350  |
| $1.2V < V_{OUT(E)} < 1.75V$ | 130    | 170  | 220  | 180    | 240  | 300  |
| $1.8V < V_{OUT(E)}$         | 120    | 160  | 200  | 170    | 220  | 270  |

Input Voltage ( $V_{IN}$ ) for Measuring PFM Duty Limit ( $DTY_{LIMIT\_PFM}$ )

| $f_{OSC}$ | 1.2MHz            | 3.0MHz            |
|-----------|-------------------|-------------------|
| C-1       | $V_{OUT(E)}+0.5V$ | $V_{OUT(E)}+1.0V$ |

Minimum operating voltage is 2.0V.

ex.) Although when  $V_{OUT(E)}$  is 1.2V and  $f_{OSC}$  is 1.2MHz, (C-1) should be 1.7V, (C-1) becomes 2.0V for the minimum operating voltage 2.0V.


Soft-Start Time, Setting Voltage ( XC9235B(G)/XC9236B(G)/XC9237B(G) Series only )

( $\mu s$ )

| SERIES                               | $f_{OSC}$ | SETTING VOLTAGE        | MIN. | TYP. | MAX. |
|--------------------------------------|-----------|------------------------|------|------|------|
| XC9235B(G)/XC9237B(G)                | 1.2MHz    | 0.8 $V_{OUT(E)} < 1.5$ | -    | 250  | 400  |
|                                      | 1.2MHz    | 1.5 $V_{OUT(E)} < 1.8$ | -    | 320  | 500  |
|                                      | 1.2MHz    | 1.8 $V_{OUT(E)} < 2.5$ | -    | 250  | 400  |
|                                      | 1.2MHz    | 2.5 $V_{OUT(E)} < 4.0$ | -    | 320  | 500  |
| XC9236B(G)                           | 1.2MHz    | 0.8 $V_{OUT(E)} < 2.5$ | -    | 250  | 400  |
|                                      | 1.2MHz    | 2.5 $V_{OUT(E)} < 4.0$ | -    | 320  | 500  |
| XC9235B(G)/<br>XC9236B(G)/XC9237B(G) | 3.0MHz    | 0.8 $V_{OUT(E)} < 1.8$ | -    | 250  | 400  |
|                                      | 3.0MHz    | 1.8 $V_{OUT(E)} < 4.0$ | -    | 320  | 500  |


## TYPICAL APPLICATION CIRCUIT

XC9235/XC9236/XC9237A, B, C, E, G Series (Output Voltage Fixed)

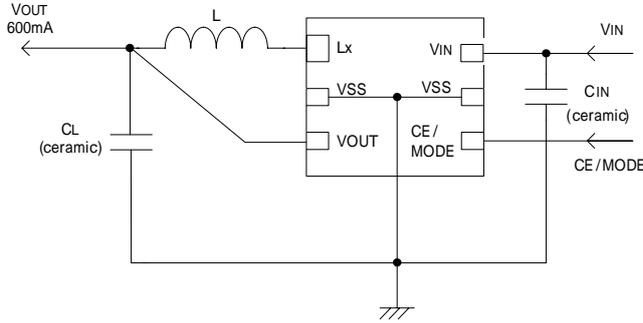

- $f_{OSC}=3.0\text{MHz}$   
 $L: 1.5\ \mu\text{H}$  (NR3015, TAIYO YUDEN)  
 $C_{IN}: 4.7\ \mu\text{F}$  (Ceramic)  
 $C_L: 10\ \mu\text{F}$  (Ceramic)  
 $f_{OSC}=1.2\text{MHz}$   
 $L: 4.7\ \mu\text{H}$  (NR4018, TAIYO YUDEN)  
 $C_{IN}: 4.7\ \mu\text{F}$  (Ceramic)  
 $C_L: 10\ \mu\text{F}$  (Ceramic)

XC9235/XC9236/XC9237D, F Series (Output Voltage External Setting)

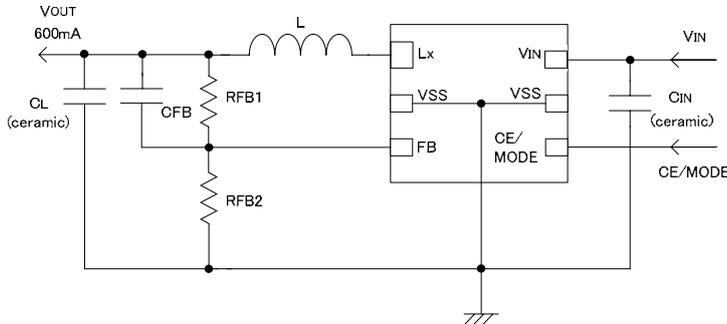

### <Setting for Output Voltage>

Output voltage can be set externally by adding two resistors to the FB pin. The output voltage is calculated by the  $R_{FB1}$  and  $R_{FB2}$  value. The total of  $R_{FB1}$  and  $R_{FB2}$  is usually selected less than  $1\text{M}\Omega$ .

Output voltages can be set in the range of  $0.9\text{V}$  to  $0.6\text{V}$  by use of  $0.8\text{V} \pm 2.0\%$  reference voltage. However, when input voltage ( $V_{IN}$ ) is lower than the setting output voltage, output voltage ( $V_{OUT}$ ) can not be higher than the input voltage ( $V_{IN}$ ).

$$V_{OUT}=0.8 \times (R_{FB1}+R_{FB2})/R_{FB2}$$

The value of the phase compensation speed-up capacitor  $C_{FB}$  is calculated by the formula of  $f_{ZFB} = 1/(2\pi \times C_{FB} \times R_{FB1})$  with  $f_{ZFB} < 10\text{kHz}$ . For optimization,  $f_{ZFB}$  can be adjusted in the range of  $1\text{kHz}$  to  $20\text{kHz}$  depending on the inductance  $L$  and the load capacitance  $C_L$  which are used.

### 【Formula】

When  $R_{FB1}=470\text{k}\Omega$  and  $R_{FB2}=150\text{k}$ ,  $V_{OUT1}=0.8 \times (470\text{k}+150\text{k}) / 150\text{k}=3.3\text{V}$

### 【Example】

| $V_{OUT}$<br>(V) | $R_{FB1}$<br>(k $\Omega$ ) | $R_{FB2}$<br>(k $\Omega$ ) | $C_{FB}$<br>(pF) | $V_{OUT}$<br>(V) | $R_{FB1}$<br>(k $\Omega$ ) | $R_{FB2}$<br>(k $\Omega$ ) | $C_{FB}$<br>(pF) |
|------------------|----------------------------|----------------------------|------------------|------------------|----------------------------|----------------------------|------------------|
| 0.9              | 100                        | 820                        | 150              | 2.5              | 510                        | 240                        | 100              |
| 1.2              | 150                        | 300                        | 100              | 3.0              | 330                        | 120                        | 150              |
| 1.5              | 130                        | 150                        | 220              | 3.3              | 470                        | 150                        | 100              |
| 1.8              | 300                        | 240                        | 150              | 4.0              | 120                        | 30                         | 470              |

## OPERATIONAL DESCRIPTION

The XC9235/XC9236/XC9237 series consists of a reference voltage source, ramp wave circuit, error amplifier, PWM comparator, phase compensation circuit, output voltage adjustment resistors, P-channel MOS driver transistor, N-channel MOS switching transistor for the synchronous switch, current limiter circuit, UVLO circuit and others. (See the block diagram above.) The series ICs compare, using the error amplifier, the voltage of the internal voltage reference source with the feedback voltage from the V<sub>OUT</sub> pin through split resistors, R1 and R2. Phase compensation is performed on the resulting error amplifier output, to input a signal to the PWM comparator to determine the turn-on time during PWM operation. The PWM comparator compares, in terms of voltage level, the signal from the error amplifier with the ramp wave from the ramp wave circuit, and delivers the resulting output to the buffer driver circuit to cause the Lx pin to output a switching duty cycle. This process is continuously performed to ensure stable output voltage. The current feedback circuit monitors the P-channel MOS driver transistor current for each switching operation, and modulates the error amplifier output signal to provide multiple feedback signals. This enables a stable feedback loop even when a low ESR capacitor such as a ceramic capacitor is used ensuring stable output voltage.

### <Reference Voltage Source>

The reference voltage source provides the reference voltage to ensure stable output voltage of the DC/DC converter.

### <Ramp Wave Circuit>

The ramp wave circuit determines switching frequency. The frequency is fixed internally and can be selected from 1.2MHz or 3.0MHz. Clock pulses generated in this circuit are used to produce ramp waveforms needed for PWM operation, and to synchronize all the internal circuits.

### <Error Amplifier>

The error amplifier is designed to monitor output voltage. The amplifier compares the reference voltage with the feedback voltage divided by the internal split resistors, R1 and R2. When a voltage lower than the reference voltage is fed back, the output voltage of the error amplifier increases. The gain and frequency characteristics of the error amplifier output are fixed internally to deliver an optimized signal to the mixer.

### <Current Limit>

The current limiter circuit of the XC9235/XC9236/XC9237 series monitors the current flowing through the P-channel MOS driver transistor connected to the Lx pin, and features a combination of the current limit mode and the operation suspension mode.


When the driver current is greater than a specific level, the current limit function operates to turn off the pulses from the Lx pin at any given timing.

When the driver transistor is turned off, the limiter circuit is then released from the current limit detection state.

At the next pulse, the driver transistor is turned on. However, the transistor is immediately turned off in the case of an over current state.

When the over current state is eliminated, the IC resumes its normal operation.

The IC waits for the over current state to end by repeating the steps through . If an over current state continues for a few ms and the above three steps are repeatedly performed, the IC performs the function of latching the OFF state of the driver transistor, and goes into operation suspension mode. Once the IC is in suspension mode, operations can be resumed by either turning the IC off via the CE/MODE pin, or by restoring power to the V<sub>IN</sub> pin. The suspension mode does not mean a complete shutdown, but a state in which pulse output is suspended; therefore, the internal circuitry remains in operation. The current limit of the XC9235/XC9236/XC9237 series can be set at 1050mA at typical. Besides, care must be taken when laying out the PC Board, in order to prevent misoperation of the current limit mode. Depending on the state of the PC Board, latch time may become longer and latch operation may not work. In order to avoid the effect of noise, the board should be laid out so that input capacitors are placed as close to the IC as possible.

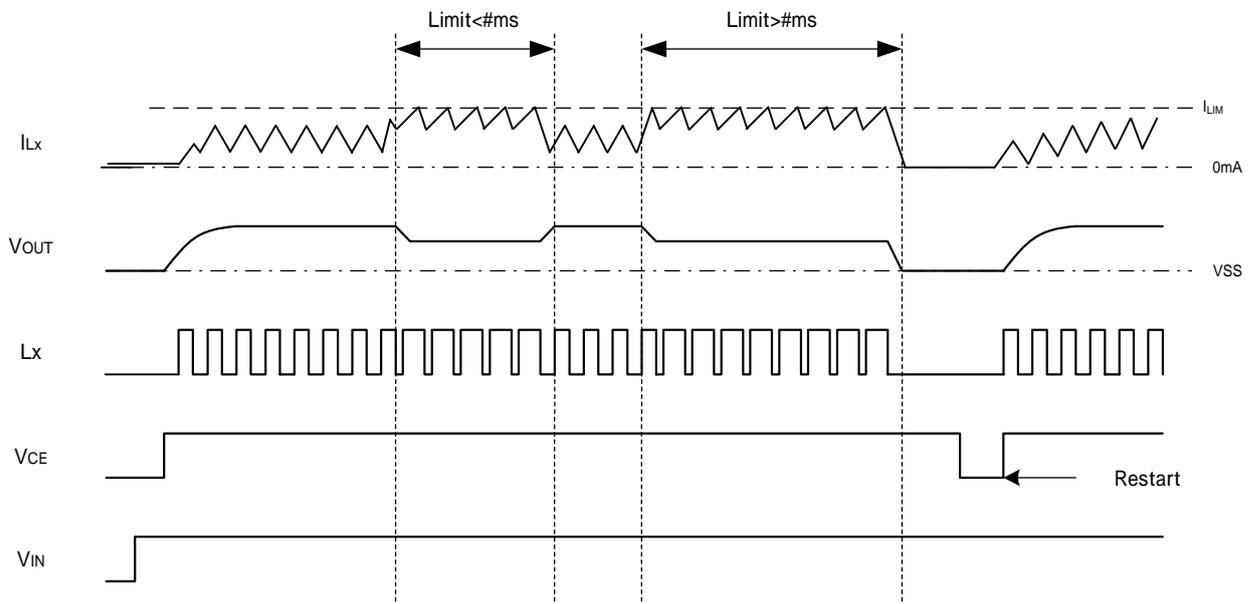

## OPERATIONAL DESCRIPTION (Continued)

### <Short-Circuit Protection>

The short-circuit protection circuit monitors the internal R1 and R2 divider voltage from the V<sub>OUT</sub> pin (refer to FB point in the block diagram shown in the previous page). In case where output is accidentally shorted to the Ground and when the FB point voltage decreases less than half of the reference voltage (V<sub>ref</sub>) and a current more than the I<sub>LIM</sub> flows to the Pch MOS driver transistor, the short-circuit protection quickly operates to turn off and to latch the driver transistor. For the D/E/F/G series, it does not matter how much the current limit, once the FB voltage become less than the quarter of reference voltage (V<sub>REF</sub>), the short-circuit protection operates to latch the Pch MOS driver transistor. In latch mode, the operation can be resumed by either turning the IC off and on via the CE/MODE pin, or by restoring power supply to the V<sub>IN</sub> pin.

When sharp load transient happens, a voltage drop at the V<sub>OUT</sub> is propagated to the FB point through C<sub>FB</sub>, as a result, short circuit protection may operate in the voltage higher than 1/2 V<sub>OUT</sub> voltage.

### <UVLO Circuit>

When the V<sub>IN</sub> pin voltage becomes 1.4V or lower, the Pch MOS driver transistor output driver transistor is forced OFF to prevent false pulse output caused by unstable operation of the internal circuitry. When the V<sub>IN</sub> pin voltage becomes 1.8V or higher, switching operation takes place. By releasing the UVLO function, the IC performs the soft start function to initiate output startup operation. The soft start function operates even when the V<sub>IN</sub> pin voltage falls momentarily below the UVLO operating voltage. The UVLO circuit does not cause a complete shutdown of the IC, but causes pulse output to be suspended; therefore, the internal circuitry remains in operation.

### <PFM Switch Current>

In PFM control operation, until coil current reaches to a specified level (I<sub>PFM</sub>), the IC keeps the Pch MOS driver transistor on. In this case, time that the Pch MOS driver transistor is kept on (T<sub>ON</sub>) can be given by the following formula.

$$t_{ON} = L \times I_{PFM} / (V_{IN} - V_{OUT}) \quad I_{PFM}$$

### < PFM Duty Limit >

In PFM control operation, the PFM duty limit (DTY<sub>LIMIT\_PFM</sub>) is set to 200% (TYP.). Therefore, under the condition that the duty increases (e.g. the condition that the step-down ratio is small), it's possible for Pch MOS driver transistor to be turned off even when coil current doesn't reach to I<sub>PFM</sub>.

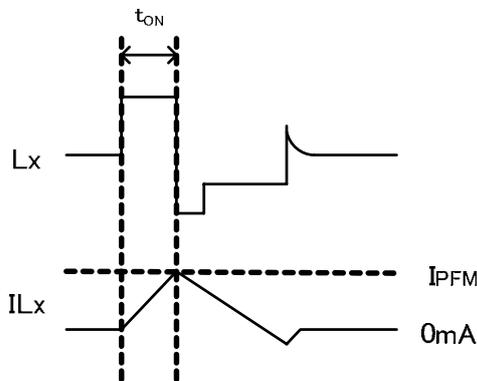


Fig. I<sub>PFM</sub> ①

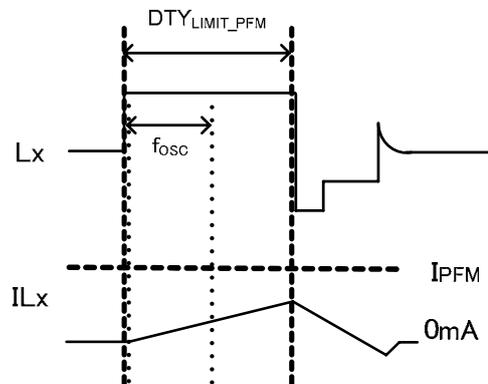


Fig. I<sub>PFM</sub> ②

## OPERATIONAL DESCRIPTION (Continued)

### < C<sub>L</sub> High Speed Discharge >

XC9235B(C)(D)(E)(F)(G)/ XC9236B(C)(D)(E)(F)(G)/ XC9237B(C)(D)(E)(F)(G) series can quickly discharge the electric charge at the output capacitor (C<sub>L</sub>) when a low signal to the CE pin which enables a whole IC circuit put into OFF state, is inputted via the Nch MOS switch transistor located between the L<sub>X</sub> pin and the V<sub>SS</sub> pin. When the IC is disabled, electric charge at the output capacitor (C<sub>L</sub>) is quickly discharged so that it may avoid application malfunction. Discharge time of the output capacitor (C<sub>L</sub>) is set by the C<sub>L</sub> auto-discharge resistance (R) and the output capacitor (C<sub>L</sub>). By setting time constant of a C<sub>L</sub> auto-discharge resistance value [R] and an output capacitor value (C<sub>L</sub>) as (τ = C × R), discharge time of the output voltage after discharge via the N channel transistor is calculated by the following formulas.

$$V = V_{OUT(E)} \times e^{-t/\tau} \quad \text{or} \quad t = \tau \times \ln(V_{OUT(E)} / V)$$

V : Output voltage after discharge

V<sub>OUT(E)</sub> : Output voltage


t: Discharge time

τ : C × R

C= Capacitance of Output capacitor (C<sub>L</sub>)

R= C<sub>L</sub> auto-discharge resistance

Output Voltage Discharge Characteristics  
R<sub>dischg</sub> = 300 (TYP)

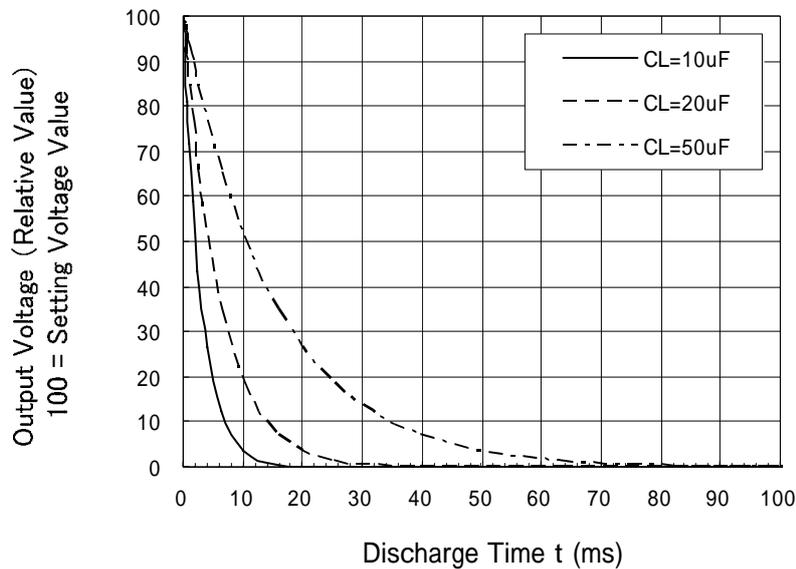

## OPERATIONAL DESCRIPTION (Continued)

### <CE/MODE Pin Function>

The operation of the XC9235/XC9236/XC9237 series will enter into the shut down mode when a low level signal is input to the CE/MODE pin. During the shutdown mode, the current consumption of the IC becomes  $0\mu\text{A}$  (TYP.), with a state of high impedance at the Lx pin and VOUT pin. The IC starts its operation by inputting a high level signal to the CE/MODE pin. The input to the CE/MODE pin is a CMOS input and the sink current is  $0\mu\text{A}$  (TYP.).


### XC9235/XC9236 series - Examples of how to use CE/MODE pin

(A)

| SW_CE | STATUS    |
|-------|-----------|
| ON    | Stand-by  |
| OFF   | Operation |

(B)

| SW_CE | STATUS    |
|-------|-----------|
| ON    | Operation |
| OFF   | Stand-by  |

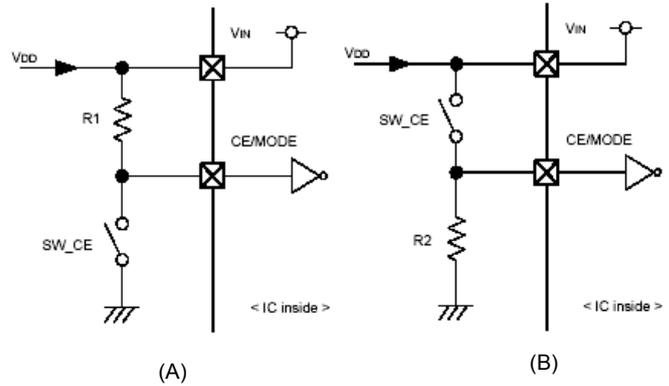


### XC9237 series - Examples of how to use CE/MODE pin

(A)

| SW_CE | SW_PWM/PFM | STATUS                              |
|-------|------------|-------------------------------------|
| ON    | *          | PWM/PFM Automatic Switching Control |
| OFF   | ON         | PWM Control                         |
| OFF   | OFF        | Stand-by                            |

(B)

| SW_CE | SW_PWM/PFM | STATUS                              |
|-------|------------|-------------------------------------|
| ON    | *          | Stand-by                            |
| OFF   | ON         | PWM Control                         |
| OFF   | OFF        | PWM/PFM Automatic Switching Control |

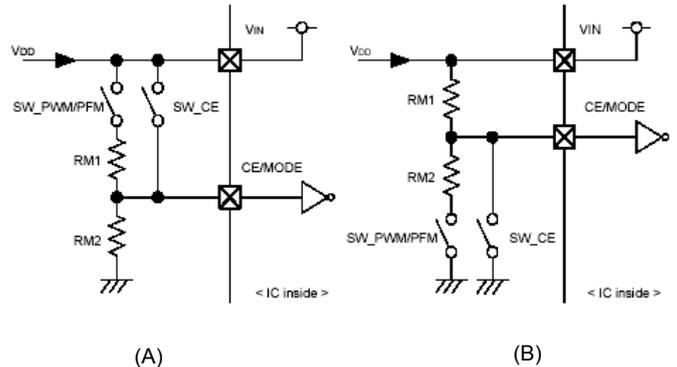

Intermediate voltage can be generated by RM1 and RM2. Please set the value of each R1, R2, RM1, RM2 from few hundreds k to few hundreds M. For switches, CPU open-drain I/O port and transistor can be used.


## OPERATIONAL DESCRIPTION (Continued)

### < Soft Start >

Soft start time is available in two options via product selection.

The A,C,D,and E types of XC9235/XC9236/XC9237 series provide 1.0ms (TYP).

The B,F, and G types of XC9235/ XC9236/XC9237 series provide 0.25ms (TYP). However, for the D/F the soft-start time can be set by the external components. Soft start time is defined as the time interval to reach 90% of the output voltage from the time when the CE pin is turned on.

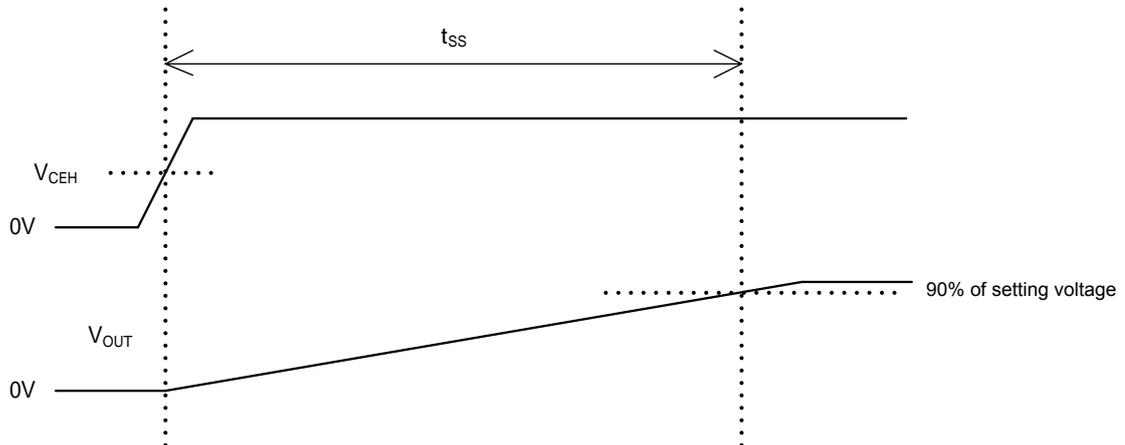

## FUNCTION CHART

| CE/MODE<br>VOLTAGE LEVEL | OPERATIONAL STATES               |   |   |
|--------------------------|----------------------------------|---|---|
|                          | XC9235                           | XC9236  | XC9237  |
| H Level <sup>(*1)</sup>  | Synchronous<br>PWM Fixed Control | Synchronous<br>PWM/PFM<br>Automatic Switching | Synchronous<br>PWM/PFM<br>Automatic Switching |
| M Level <sup>(*2)</sup>  |                                  |   | Synchronous<br>PWM Fixed Control              |
| L Level <sup>(*3)</sup>  | Stand-by                         | Stand-by                                      | Stand-by                                      |

Note on CE/MODE pin voltage level range

(\*1) H level:  $0.65V \leq V_{CE/MODE} \leq 6.0V$  (for XC9235/XC9236)

H level:  $V_{IN} - 0.25V \leq V_{CE/MODE} \leq V_{IN}$  (for XC9237)

(\*2) M level:  $0.65V \leq V_{CE/MODE} \leq V_{IN} - 1.0V$  (for XC9237)


(\*3) L level:  $0V \leq V_{CE/MODE} \leq 0.25V$

## NOTE ON USE

- For temporary, transitional voltage drop or voltage rising phenomenon, the IC is liable to malfunction should the ratings be exceeded.
- The XC9235/XC9236/XC9237 series is designed for use with ceramic output capacitors. If, however, the potential difference is too large between the input voltage and the output voltage, a ceramic capacitor may fail to absorb the resulting high switching energy and oscillation could occur on the output. If the input-output potential difference is large, connect an electrolytic capacitor in parallel to compensate for insufficient capacitance.
- Spike noise and ripple voltage arise in a switching regulator as with a DC/DC converter. These are greatly influenced by external component selection, such as the coil inductance, capacitance values, and board layout of external components. Once the design has been completed, verification with actual components should be done.
- Depending on the input-output voltage differential, or load current, some pulses may be skipped, and the ripple voltage may increase.
- When the difference between  $V_{IN}$  and  $V_{OUT}$  is large in PWM control, very narrow pulses will be outputted, and there is the possibility that some cycles may be skipped completely.
- When the difference between  $V_{IN}$  and  $V_{OUT}$  is small, and the load current is heavy, very wide pulses will be outputted and there is the possibility that some cycles may be skipped completely.
- With the IC, the peak current of the coil is controlled by the current limit circuit. Since the peak current increases when dropout voltage or load current is high, current limit starts operation, and this can lead to instability. When peak current becomes high, please adjust the coil inductance value and fully check the circuit operation. In addition, please calculate the peak current according to the following formula:  


$$I_{pk} = (V_{IN} - V_{OUT}) \times \text{OnDuty} / (2 \times L \times f_{osc}) + I_{OUT}$$

L: Coil Inductance Value  
 $f_{osc}$ : Oscillation Frequency
- When the peak current which exceeds limit current flows within the specified time, the built-in Pch MOS driver transistor turns off. During the time until it detects limit current and before the built-in transistor can be turned off, the current for limit current flows; therefore, care must be taken when selecting the rating for the external components such as a coil.
- When  $V_{IN}$  is less than 2.4V, limit current may not be reached because voltage falls caused by ON resistance.
- Care must be taken when laying out the PC Board, in order to prevent misoperation of the current limit mode. Depending on the state of the PC Board, latch time may become longer and latch operation may not work. In order to avoid the effect of noise, the board should be laid out so that input capacitors are placed as close to the IC as possible.
- Use of the IC at voltages below the recommended voltage range may lead to instability.
- This IC should be used within the stated absolute maximum ratings in order to prevent damage to the device.
- When the IC is used in high temperature, output voltage may increase up to input voltage level at no load because of the leak current of the driver transistor.
- The current limit is set to 1350mA (MAX.) at typical. However, the current of 1350mA or more may flow. In case that the current limit functions while the  $V_{OUT}$  pin is shorted to the GND pin, when Pch MOS driver transistor is ON, the potential difference for input voltage will occur at both ends of a coil. For this, the time rate of coil current becomes large. By contrast, when Nch MOS driver transistor is ON, there is almost no potential difference at both ends of the coil since the  $V_{OUT}$  pin is shorted to the GND pin. Consequently, the time rate of coil current becomes quite small. According to the repetition of this operation, and the delay time of the circuit, coil current will be converged on a certain current value, exceeding the amount of current, which is supposed to be limited originally. Even in this case, however, after the over current state continues for several ms, the circuit will be latched. A coil should be used within the stated absolute maximum rating in order to prevent damage to the device.  
 Current flows into Pch MOS driver transistor to reach the current limit ( $I_{LIM}$ ).  
 The current of  $I_{LIM}$  or more flows since the delay time of the circuit occurs during from the detection of the current limit to OFF of Pch MOS driver transistor.  
 Because of no potential difference at both ends of the coil, the time rate of coil current becomes quite small.  
 $I_L$  oscillates very narrow pulses by the current limit for several ms.  
 The circuit is latched, stopping its operation.

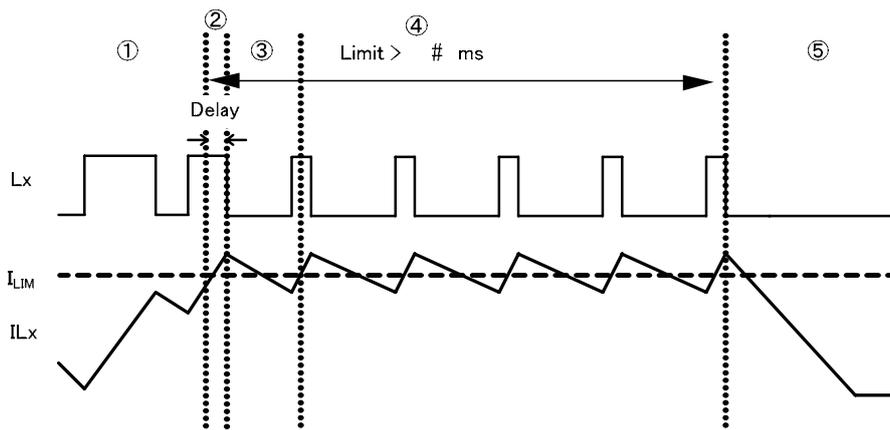

## NOTE ON USE (Continued)

15. In order to stabilize  $V_{IN}$ 's voltage level and oscillation frequency, we recommend that a by-pass capacitor ( $C_{IN}$ ) be connected as close as possible to the  $V_{IN}$  &  $V_{SS}$  pins.
16. High step-down ratio and very light load may lead an intermittent oscillation.
17. During PWM / PFM automatic switching mode, operating may become unstable at transition to continuous mode. Please verify with actual parts.

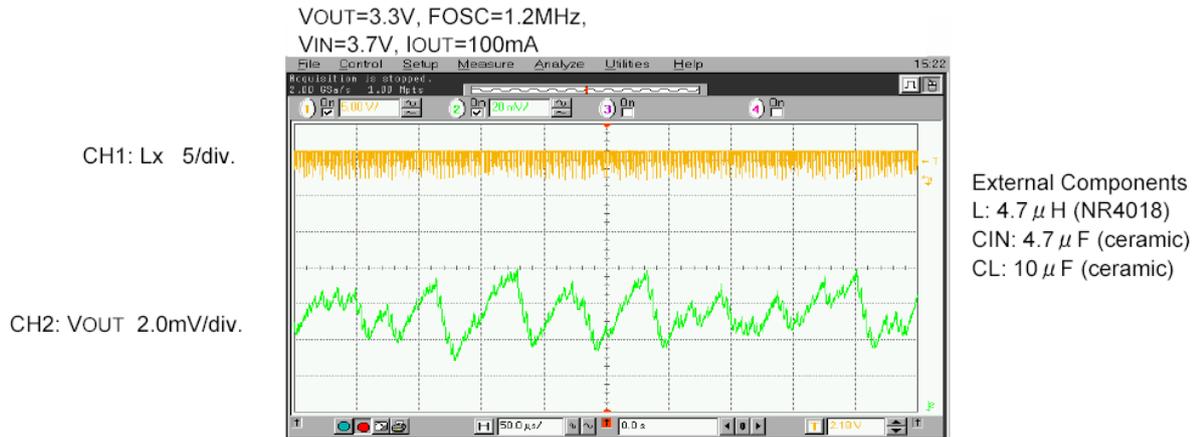

18. Please note the inductance value of the coil. The IC may enter unstable operation if the combination of ambient temperature, setting voltage, oscillation frequency, and L value are not adequate. In the operation range close to the maximum duty cycle, The IC may happen to enter unstable output voltage operation even if using the L values listed below.




The Range of L Value

| $f_{OSC}$ | $V_{OUT}$               | L Value                   |
|-----------|-------------------------|---------------------------|
| 3.0MHz    | 0.8V < $V_{OUT}$ < 4.0V | 1.0 $\mu$ H ~ 2.2 $\mu$ H |
| 1.2MHz    | $V_{OUT}$ < 2.5V        | 3.3 $\mu$ H ~ 6.8 $\mu$ H |
|           | 2.5V < $V_{OUT}$        | 4.7 $\mu$ H ~ 6.8 $\mu$ H |

\*When a coil less value of 4.7 $\mu$ H is used at  $f_{OSC}$ =1.2MHz or when a coil less value of 1.5 $\mu$ H is used at  $f_{OSC}$ =3.0MHz, peak coil current more easily reach the current limit  $I_{LMI}$ . In this case, it may happen that the IC can not provide 600mA output current.

19. It may happen to enter unstable operation when the IC goes into continuous operation mode under the condition of large input-output voltage difference. Care must be taken with the actual design unit.

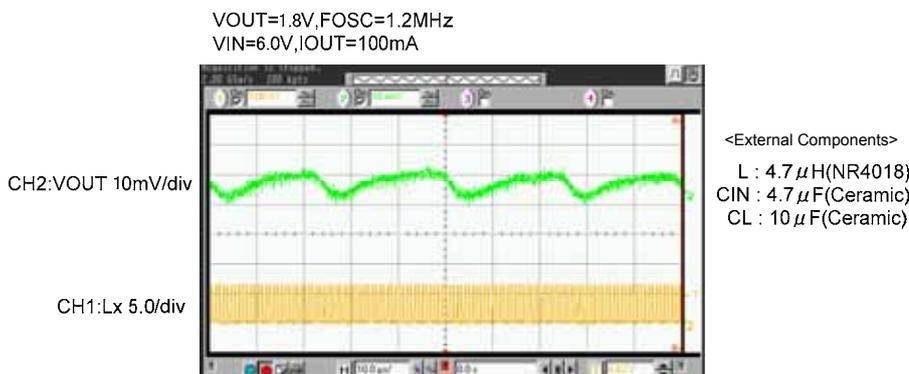


20. Torex places an importance on improving our products and their reliability. We request that users incorporate fail-safe designs and post-aging protection treatment when using Torex products in their systems.

## NOTE ON USE (Continued)

### 21. Instructions of pattern layouts


- (1) In order to stabilize  $V_{IN}$  voltage level, we recommend that a by-pass capacitor ( $C_{IN}$ ) be connected as close as possible to the  $V_{IN}$  &  $V_{SS}$  pins.
- (2) Please mount each external component as close to the IC as possible.
- (3) Wire external components as close to the IC as possible and use thick, short connecting traces to reduce the circuit impedance.
- (4) Make sure that the PCB GND traces are as thick as possible, as variations in ground potential caused by high ground currents at the time of switching may result in instability of the IC.
- (5) This series' internal driver transistors bring on heat because of the output current and ON resistance of driver transistors.

XC9235/XC9236/XC9237 A,B,C (Output Voltage Fixed)  
(PKG:SOT-25)

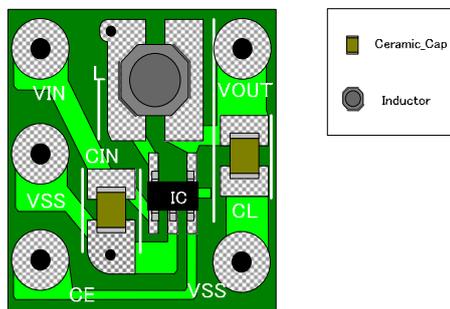


For the VIN, VOUT, VSS, CE, please put the wire.

XC9235/XC9236/XC9237 A,B,C,E,G (Output Voltage Fixed)  
(PKG:USP-6C/USP-6EL)

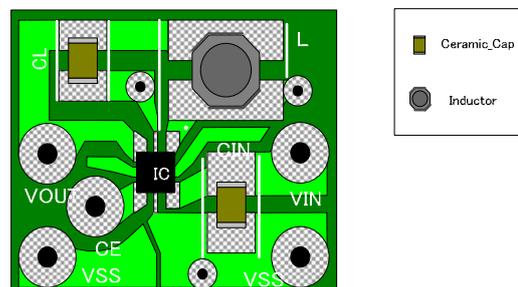

For the VIN, VOUT, VSS, CE, please put the wire.


XC9235/XC9236/XC9237 A,B (Output Voltage Fixed)  
(PKG:WLP-5-03)

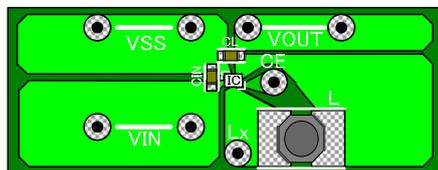

For the VIN, VOUT, VSS, CE, please put the wire.



XC9235/XC9236/XC9237 D,F (Output Voltage External Setting)  
(PKG:USP-6C)

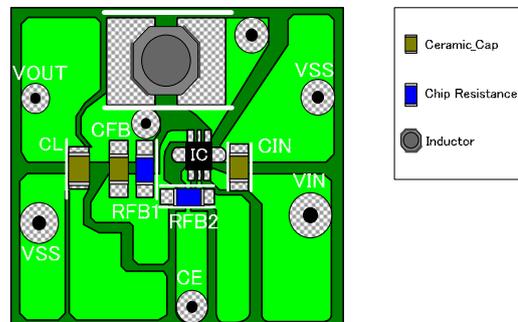

For the VIN, VOUT, VSS, CE, please put the wire.


### 22. NOTE ON MOUNTING (WLP-5-03)

- (1) Mount pad design should be optimized for user's conditions.
- (2) Sn-AG-Cu is used for the package terminals. If eutectic solder is used, mounting reliability is decreased. Please do not use eutectic solder paste.
- (3) When underfill agent is used to increase interfacial bonding strength, please take enough evaluation for selection. Some underfill materials and applied conditions may decrease bonding reliability.
- (4) The IC has exposed surface of silicon material in the top marking face and sides so that it is weak against mechanical damages. Please take care of handling to avoid cracks and breaks.
- (5) The IC has exposed surface of silicon material in the top marking face and sides. Please use the IC with keeping the circuit open (avoiding short-circuit from the out).
- (6) Semi-transparent resin is coated on the circuit face of the package. Please be noted that the usage under strong lights may affects device performance.

## TEST CIRCUITS

### < Circuit No.1 >

·A/B/C/E/G series

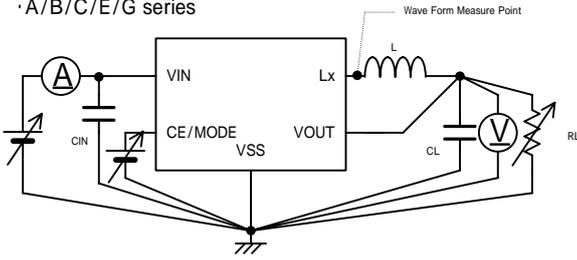


External Components

L : 1.5 $\mu$ H(NR3015) 3.0MHz  
4.7 $\mu$ H(NR4018) 1.2MHz

CIN : 4.7  $\mu$ F(ceramic)  
CL : 10  $\mu$ F(ceramic)

### ·D/F series

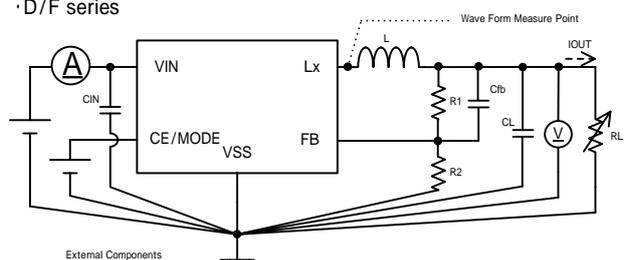

External Components

L : 1.5  $\mu$ H(NR4018) 3.0MHz  
4.7  $\mu$ H(NR3015) 1.2MHz


CIN : 4.7  $\mu$ F

CL : 10  $\mu$ F


R1 : 150k  
R2 : 300k  
Cfb : 120pF

$$V_{out} = V_{in} \times (R1 + R2) / R2$$


### < Circuit No.2 >

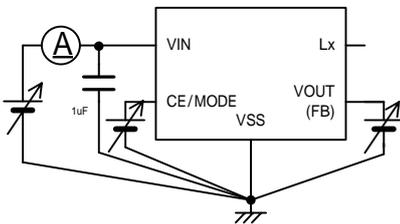

### < Circuit No.3 >

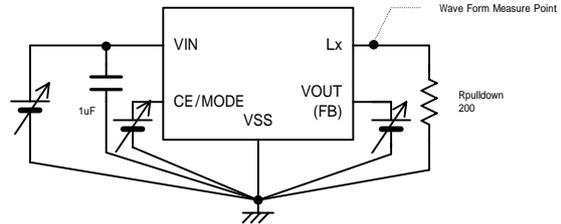


### < Circuit No.4 >

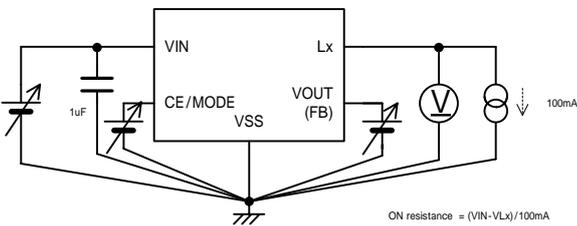


$$\text{ON resistance} = (V_{in} - V_{Lx}) / 100\text{mA}$$


### < Circuit No.5 >

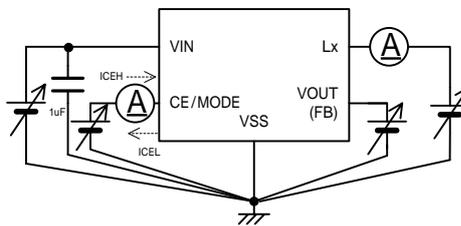


### < Circuit No.6 >

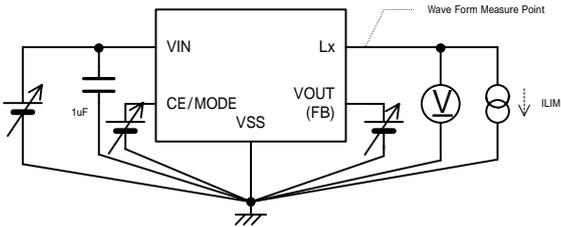


### < Circuit No.7 >

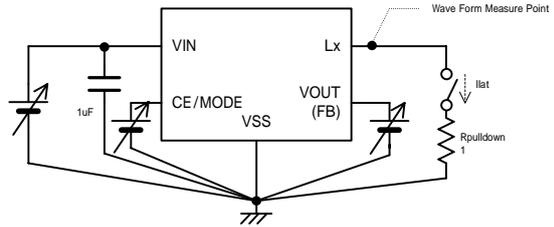

### < Circuit No.8 >


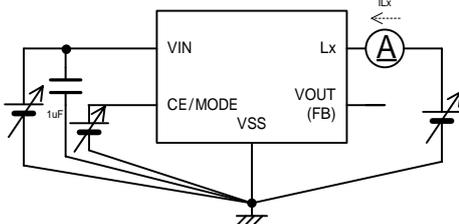


### < Circuit No.9 >


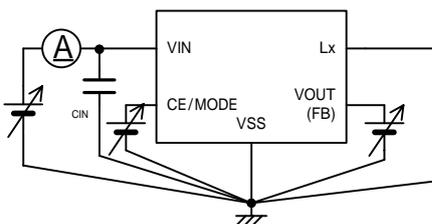


## TYPICAL PERFORMANCE CHARACTERISTICS



### (1) Efficiency vs. Output Current

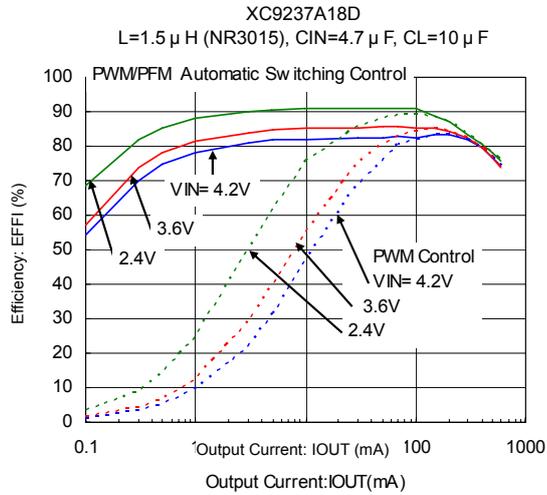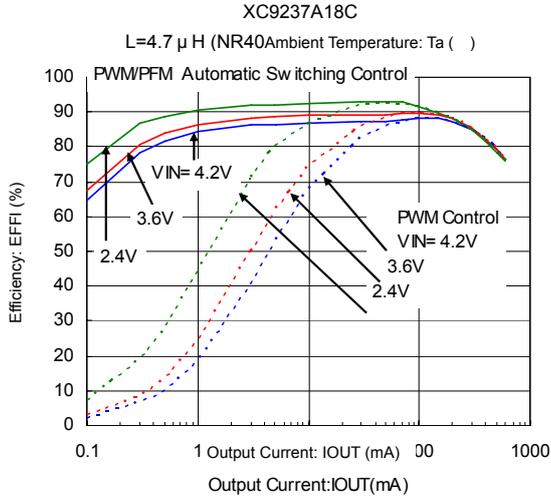

### (2) Output Voltage vs. Output Current

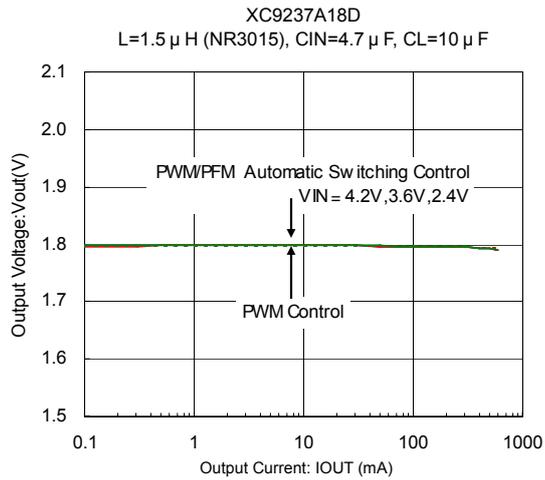
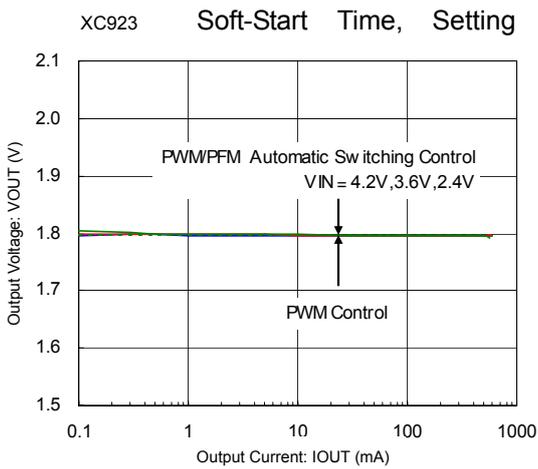


### (3) Ripple Voltage vs. Output Current

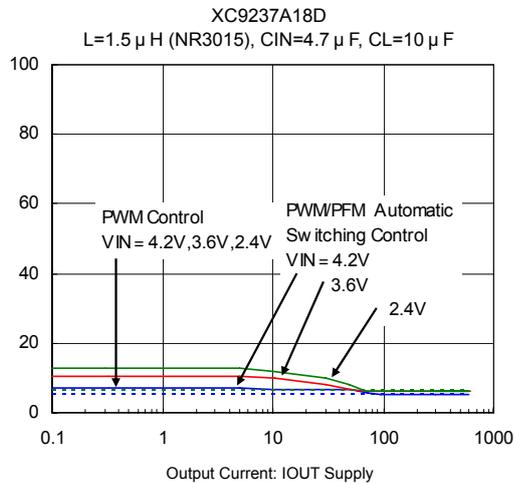
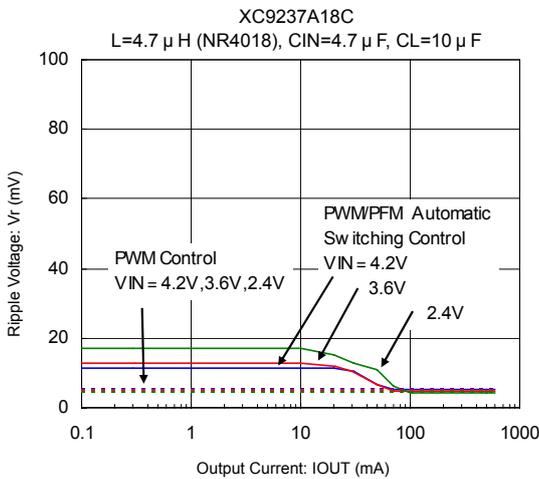


## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(4) Oscillation Frequency vs. Ambient Temperature

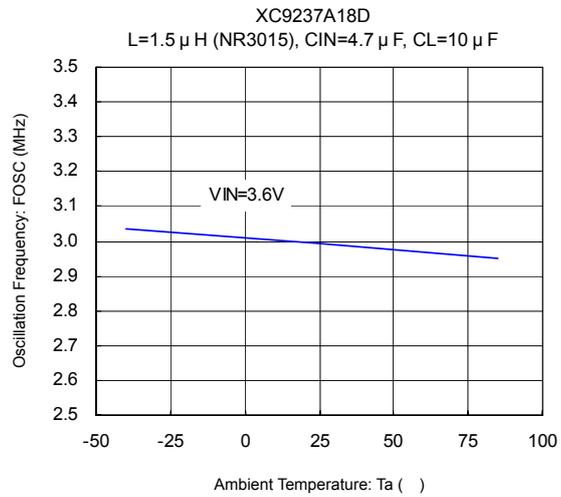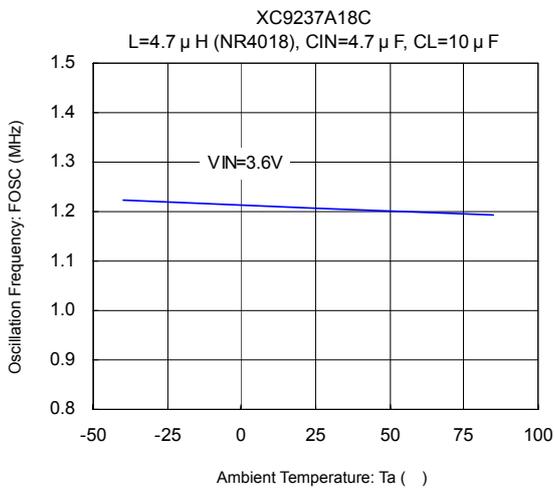


(5) Supply Current vs. Ambient Temperature

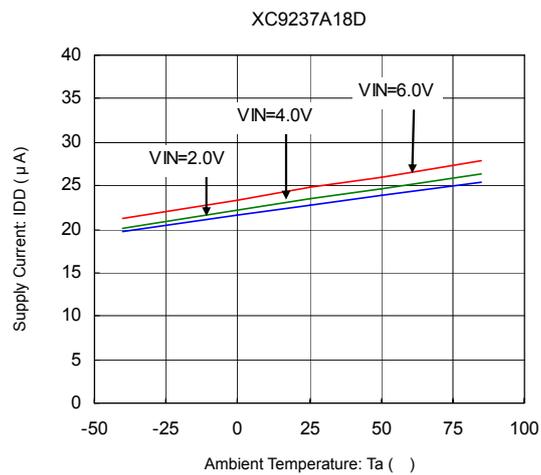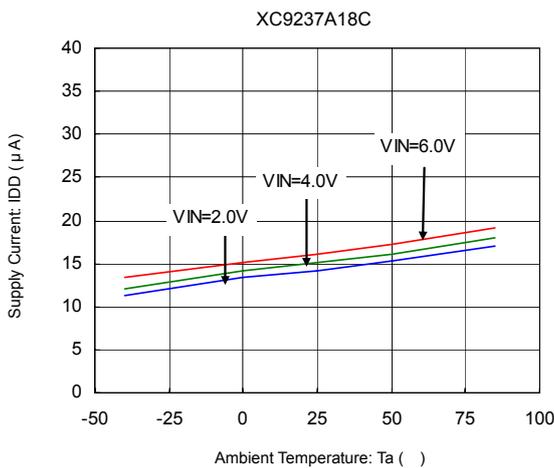

(6) Output Voltage vs. Ambient Temperature

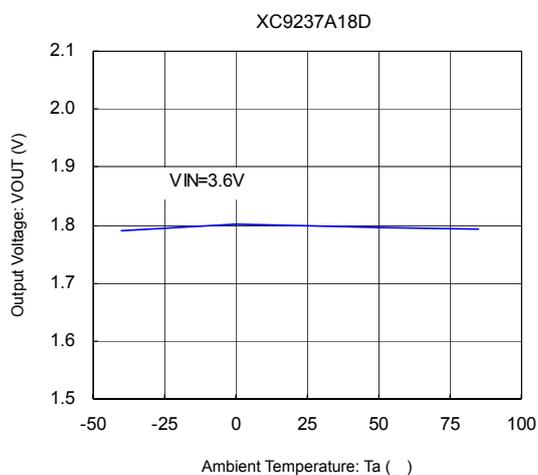


(7) UVLO Voltage vs. Ambient Temperature

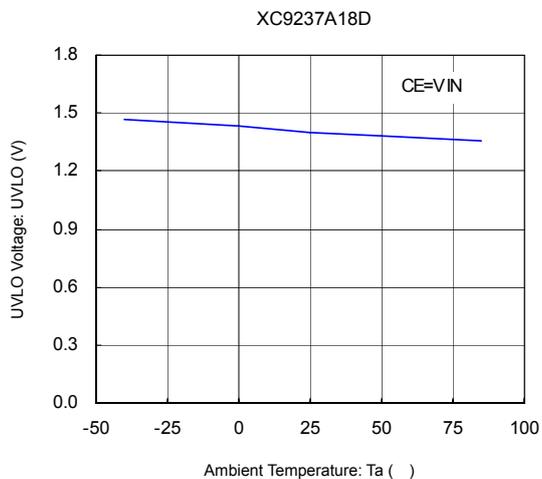


## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)



(8) CE "H" Voltage vs. Ambient Temperature

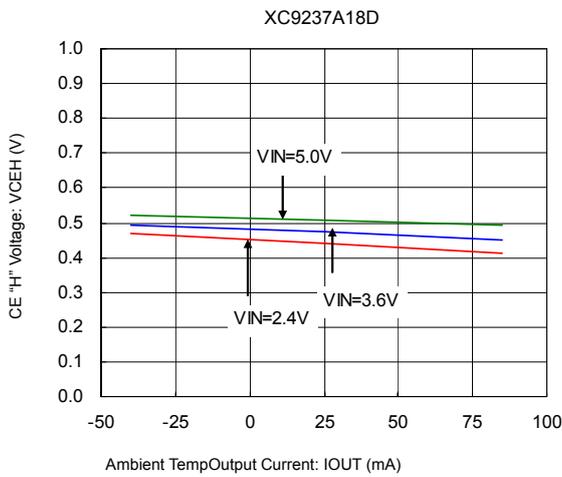


(9) CE "L" Voltage vs. Ambient Temperature

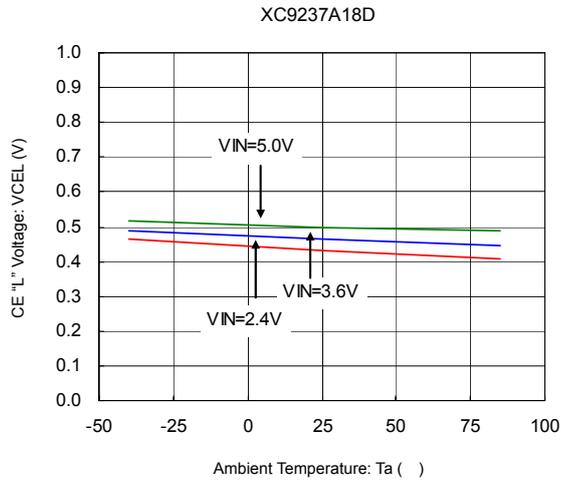

(10) Soft Start Time vs. Ambient Temperature

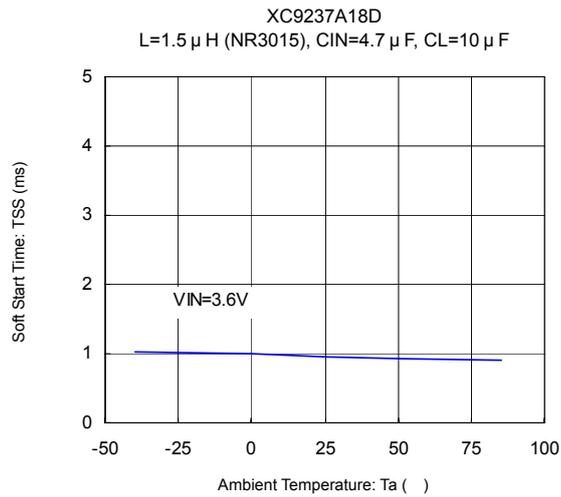
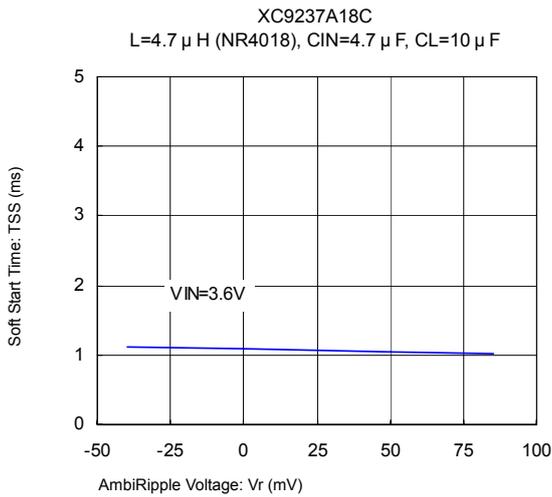


(11) "Pch / Nch" Driver on Resistance vs. Input Voltage


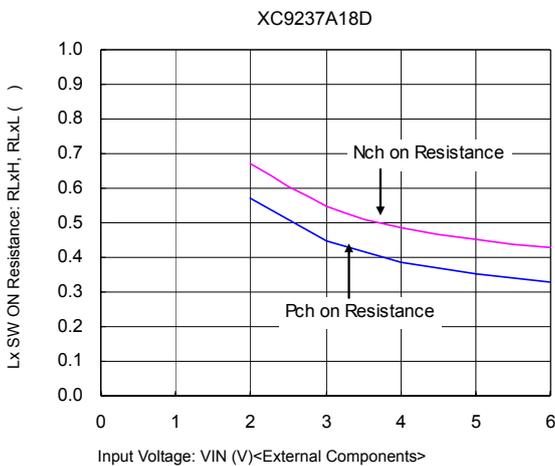


## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(12) XC9235B/36B/37B Rise Wave Form

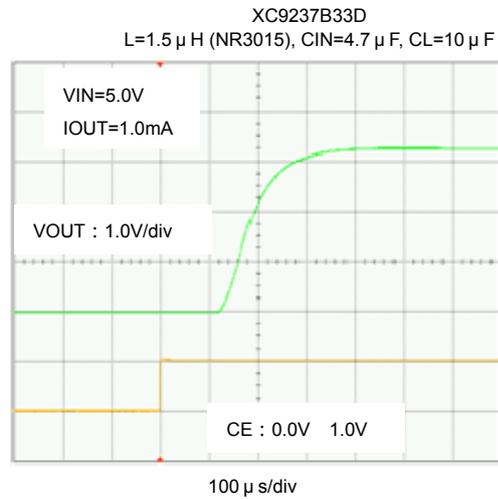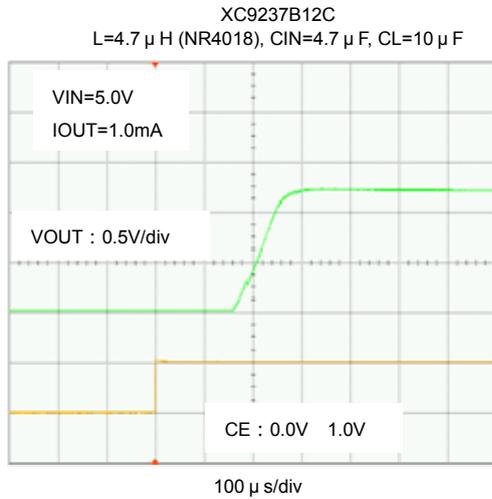

(13) XC9235B/36B/37B Soft-Start Time vs. Ambient Temperature

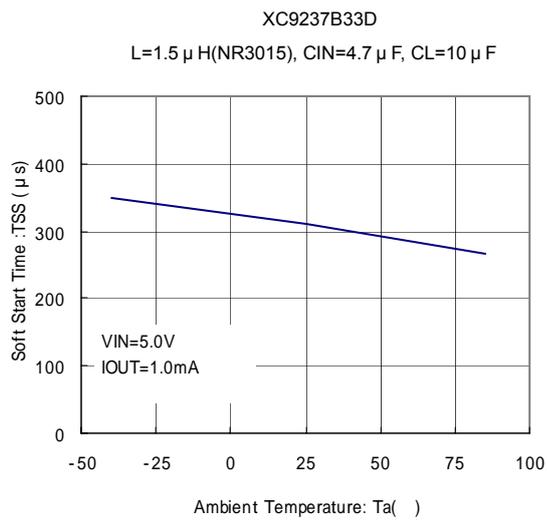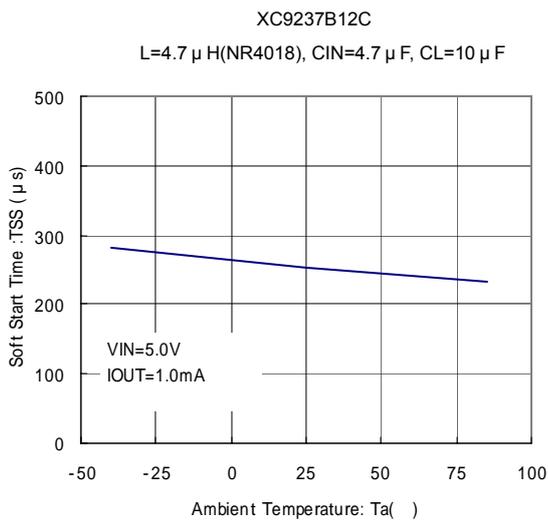

(14) XC9235B/36B/37B CL Discharge Resistance vs. Ambient Temperature

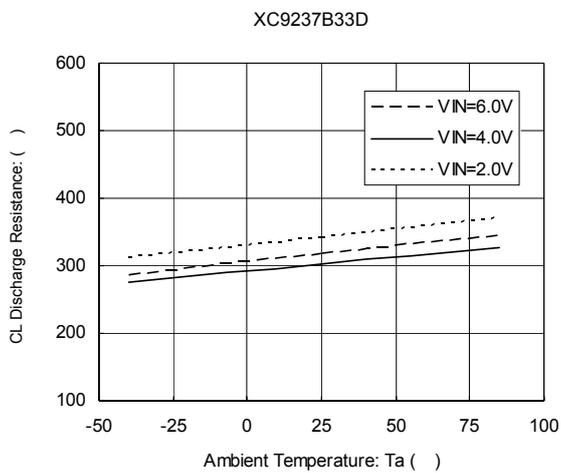





## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

### (15) Load Transient Response

XC9237A18C

$L=4.7\ \mu\text{H}$  (NR4018),  $C_{\text{IN}}=4.7\ \mu\text{F}$  (ceramic),  $C_{\text{L}}=10\ \mu\text{F}$  (ceramic),  $T_{\text{opr}}=25$

$V_{\text{IN}}=3.6\text{V}$ ,  $V_{\text{CE}}=V_{\text{IN}}$  (PWM/PFM Automatic Switching Control)

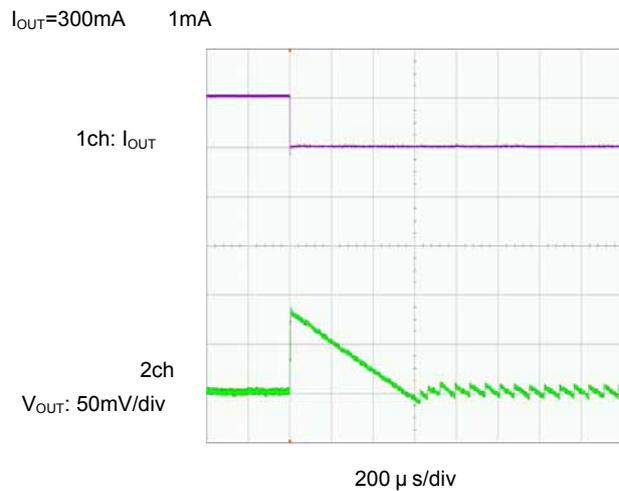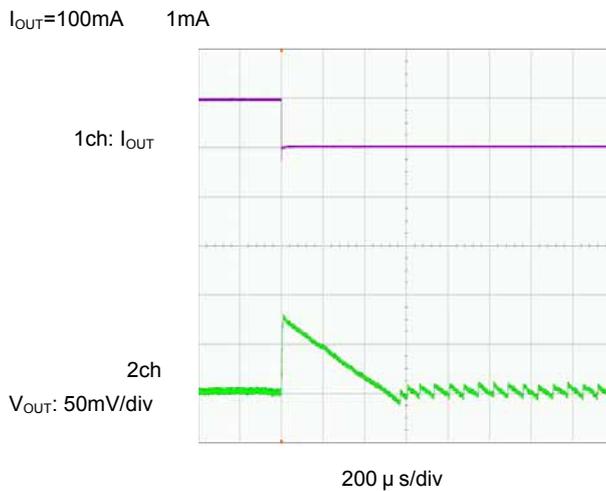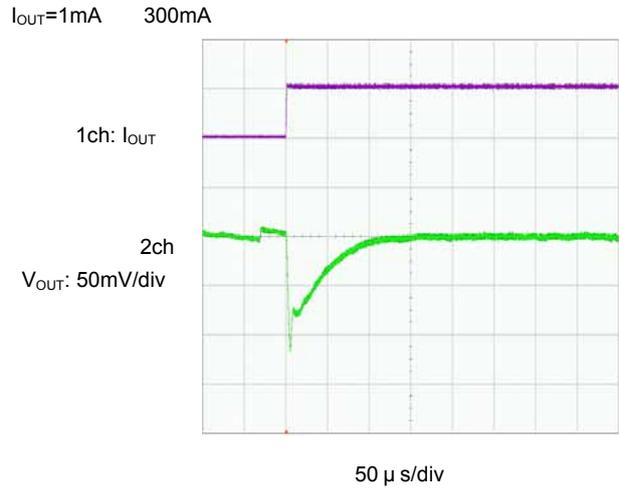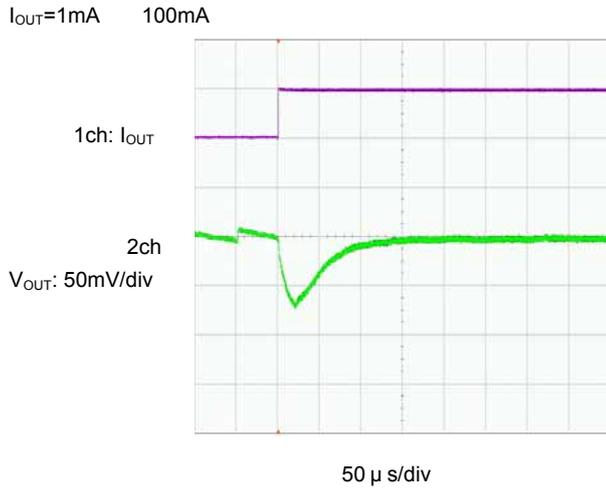





## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(15) Load Transient Response (Continued)

XC9237A18C

$L=4.7\ \mu\text{H}$  (NR4018),  $C_{\text{IN}}=4.7\ \mu\text{F}$  (ceramic),  $C_{\text{L}}=10\ \mu\text{F}$  (ceramic),  $T_{\text{opr}}=25$

$V_{\text{IN}}=3.6\text{V}$ ,  $V_{\text{CE}}=1.8\text{V}$  (PWM Control)

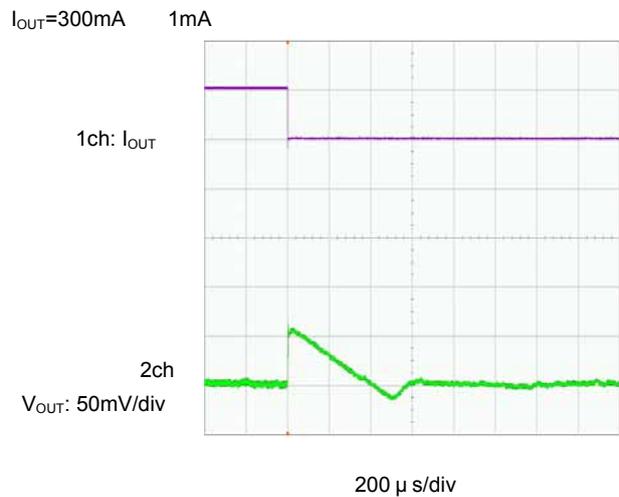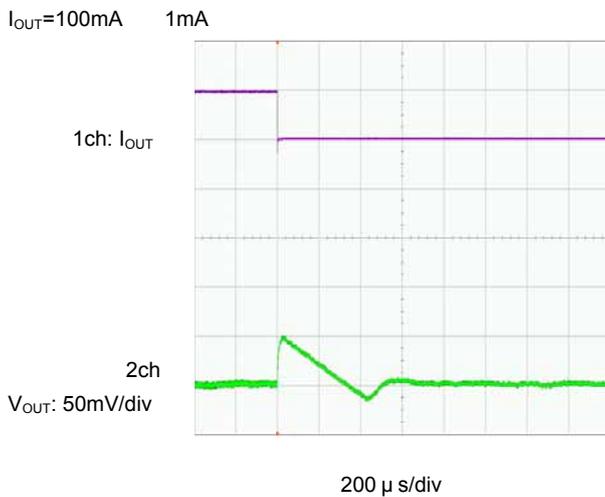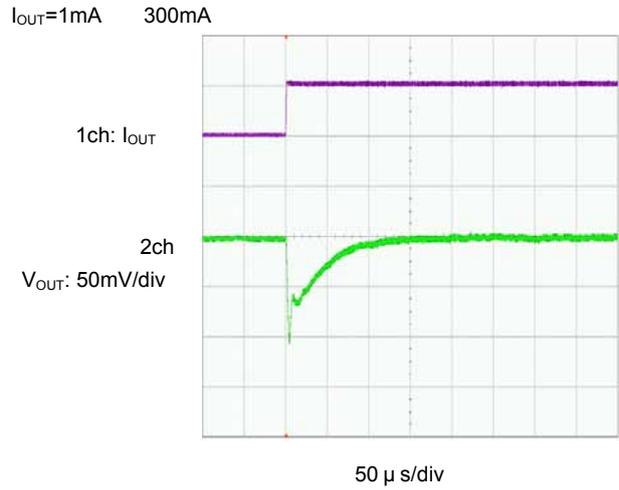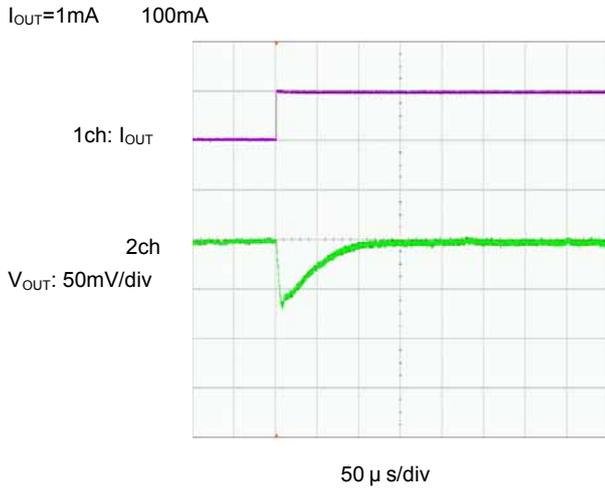

## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(15) Load Transient Response (Continued)

XC9237A18D


$L=1.5\ \mu\text{H}$  (NR3015),  $C_{\text{IN}}=4.7\ \mu\text{F}$  (ceramic),  $C_{\text{L}}=10\ \mu\text{F}$  (ceramic),  $T_{\text{opr}}=25$

$V_{\text{IN}}=3.6\text{V}$ ,  $V_{\text{CE}}=V_{\text{IN}}$  (PWM/PFM Automatic Switching Control)


$I_{\text{OUT}}=1\text{mA}$     100mA

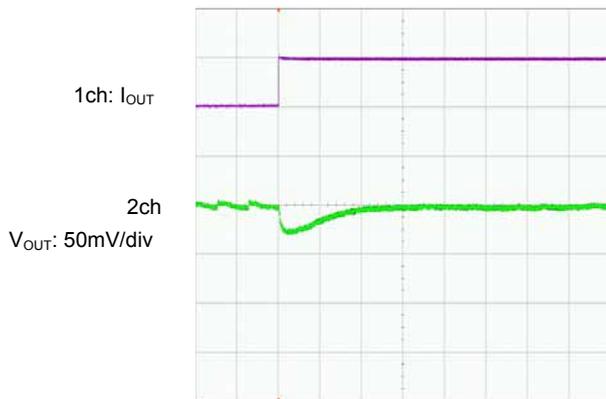


$I_{\text{OUT}}=1\text{mA}$     300mA

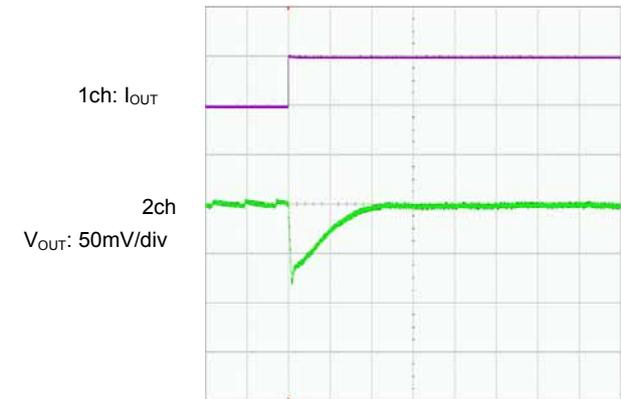

$I_{\text{OUT}}=100\text{mA}$     1mA

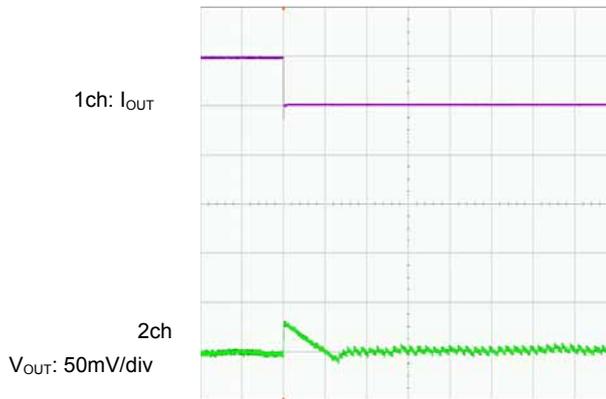

$I_{\text{OUT}}=300\text{mA}$     1mA

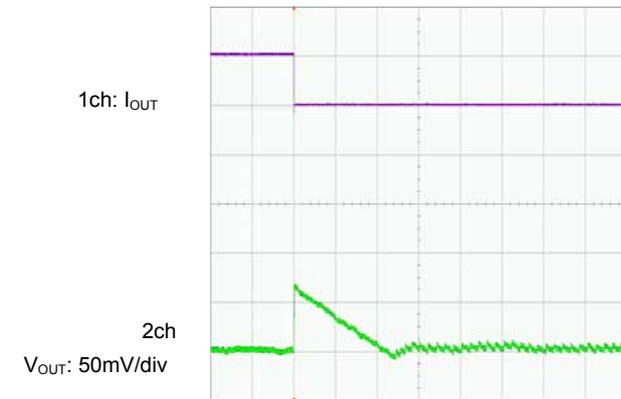





## TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(15) Load Transient Response (Continued)

XC9237A18D

$L=1.5\ \mu\text{H}$  (NR3015),  $C_{\text{IN}}=4.7\ \mu\text{F}$  (ceramic),  $C_{\text{L}}=10\ \mu\text{F}$  (ceramic),  $T_{\text{opr}}=25$


$V_{\text{IN}}=3.6\text{V}$ ,  $V_{\text{CE}}=1.8\text{V}$  (PWM Control)

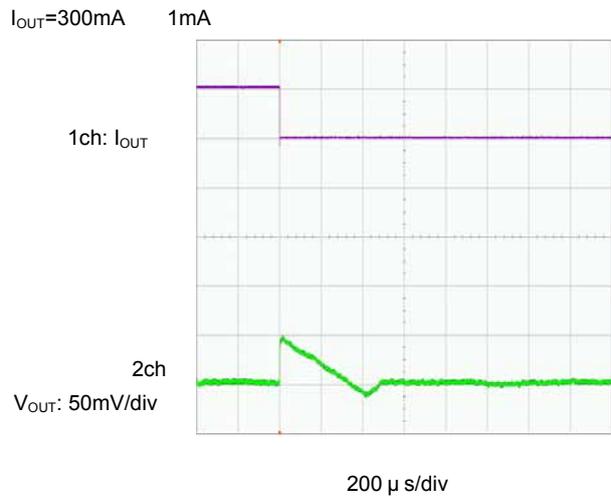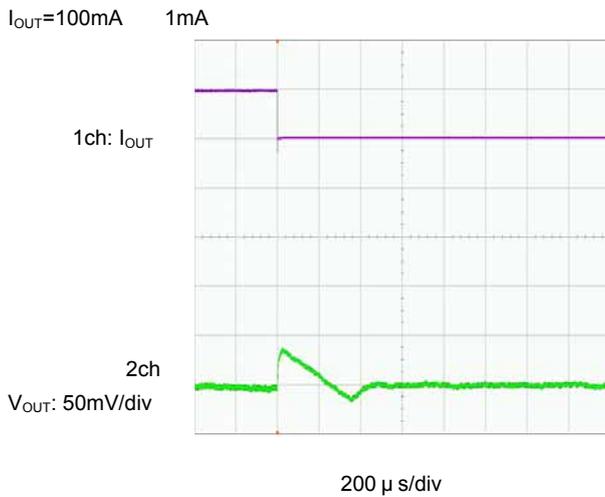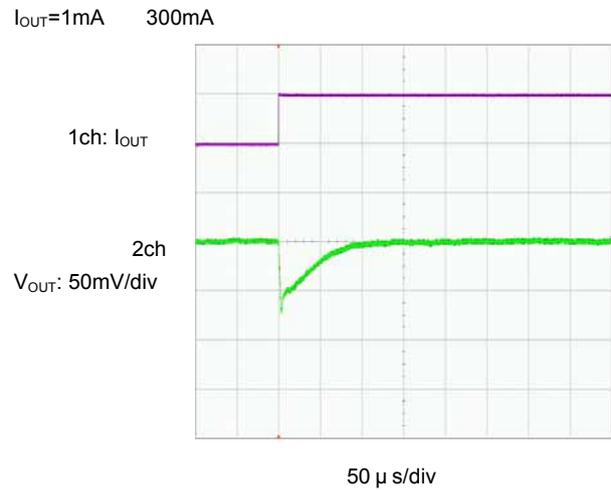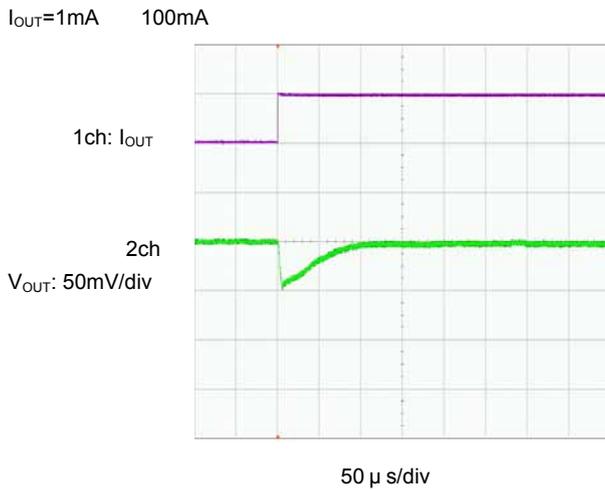

## PACKAGING INFORMATION


SOT-25

(unit : mm)

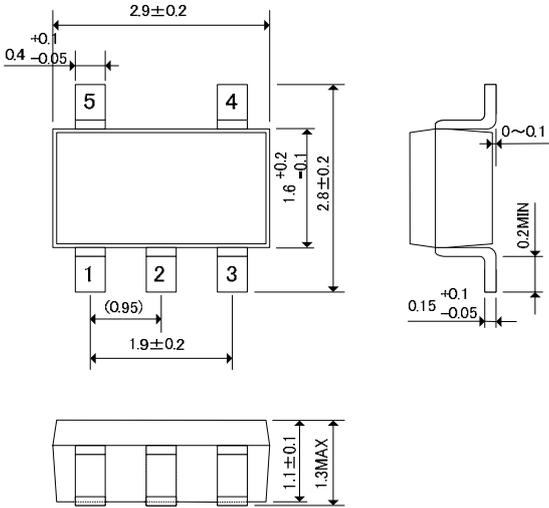


USP-6C


(unit : mm)

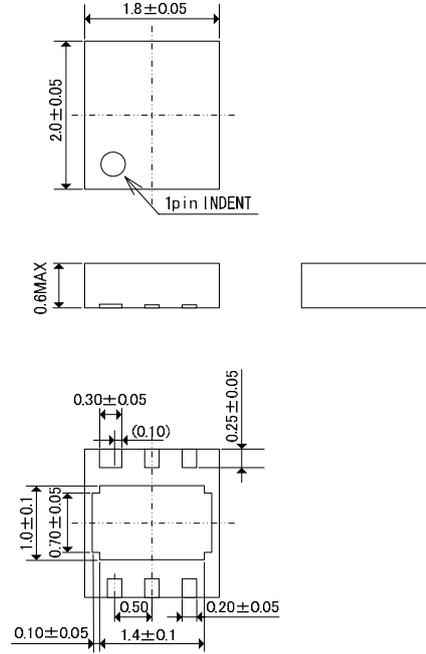

USP-6C Reference Pattern Layout

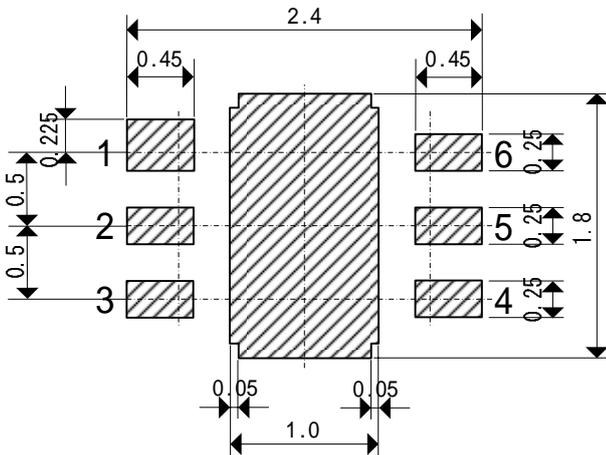


USP-6C Reference Metal Mask Design

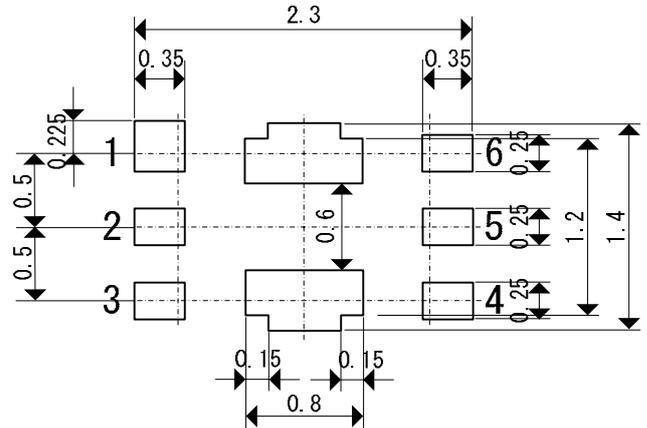


## PACKAGING INFORMATION (Continued)

### USP-6EL

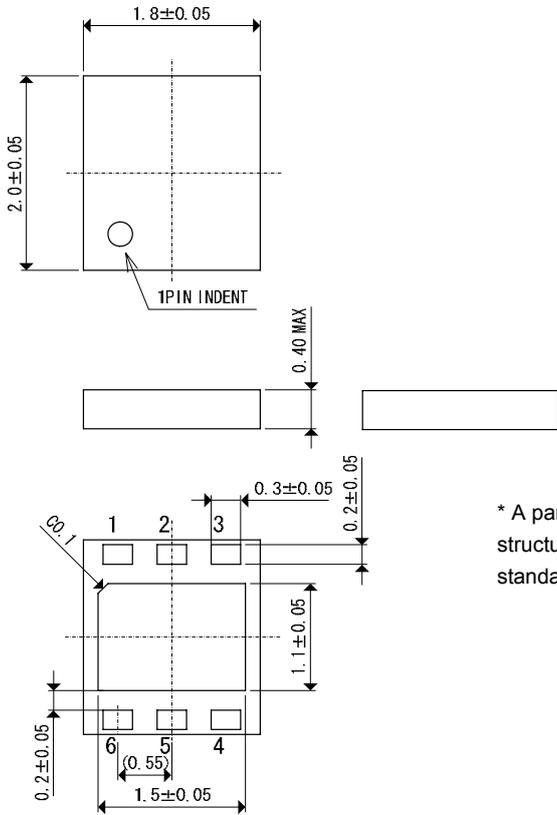


\* A part of the pin may appear from the side of the package because of it's structure, but reliability of the package and strength will not be changed below the standard.

USP-6EL Reference Pattern Layout

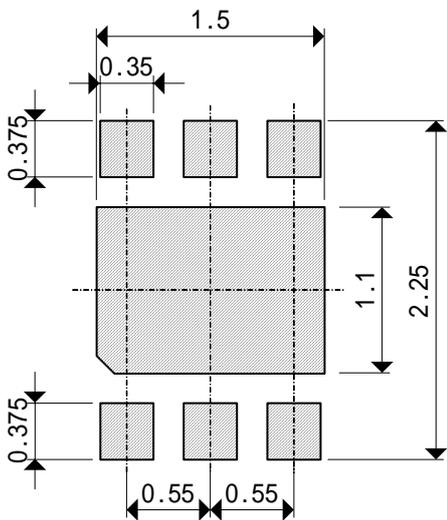


USP-6EL Reference Metal Mask Design

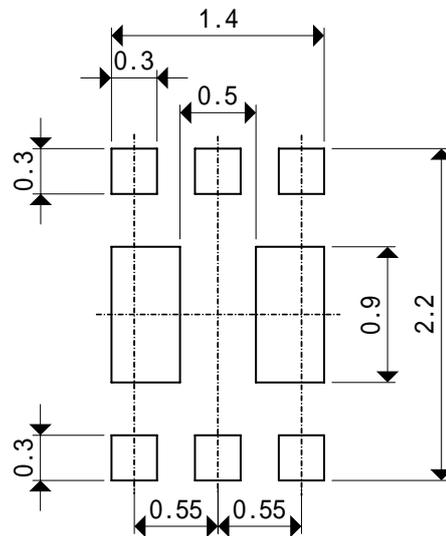




## MARKING RULE

### SOT-25




SOT-25  
(TOP VIEW)

### USP-6C/USP-6EL



USP-6C/USP-6EL  
(TOP VIEW)

### WLP-5-03



WLP-5-03  
(TOP VIEW)

represents product series

| PRODUCT SERIES | XC9235 | XC9236 | XC9237 |
|----------------|--------|--------|--------|
| A              | 4      | 5      | 6      |
| B              | C      | D      | E      |
| C              | K      | L      | M      |
| D              | K      | L      | M      |
| E              | 4      | 5      | 6      |
| F              | 2      | 7      | B      |
| G              | C      | D      | E      |

represents integer number of output voltage and oscillation frequency  
A/B/C/F Series

| OUTPUT VOLTAGE (V) | MARK             |                  |
|--------------------|------------------|------------------|
|                    | $f_{osc}=1.2MHz$ | $f_{osc}=3.0MHz$ |
| 0.X                | A                | F                |
| 1.X                | B                | H                |
| 2.X                | C                | K                |
| 3.X                | D                | L                |
| 4.X                | E                | M                |

E/G/D Series

| OUTPUT VOLTAGE (V) | MARK             |                  |
|--------------------|------------------|------------------|
|                    | $f_{osc}=1.2MHz$ | $f_{osc}=3.0MHz$ |
| 0.X                | N                | U                |
| 1.X                | P                | V                |
| 2.X                | R                | X                |
| 3.X                | S                | Y                |
| 4.X                | T                | Z                |

represents decimal point of output voltage

| $V_{OUT}$ (V) | MARK | $V_{OUT}$ (V) | MARK |
|---------------|------|---------------|------|
| X.00          | 0    | X.05          | A    |
| X.10          | 1    | X.15          | B    |
| X.20          | 2    | X.25          | C    |
| X.30          | 3    | X.35          | D    |
| X.40          | 4    | X.45          | E    |
| X.50          | 5    | X.55          | F    |
| X.60          | 6    | X.65          | H    |
| X.70          | 7    | X.75          | K    |
| X.80          | 8    | X.85          | L    |
| X.90          | 9    | X.95          | M    |

represents production lot number

Order of 01 ~ 09, 0A ~ 0Z, 11 ~ 9Z, A1 ~ A9, AA ~ AZ, B1 ~ ZZ.  
(G, I, J, O, Q, W excluded)

\*No character inversion used.

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this datasheet.
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this datasheet.
4. The products in this datasheet are not developed, designed, or approved for use with such equipment whose failure or malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.  
(e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this datasheet within the specified ranges.  
Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this datasheet may be copied or reproduced without the prior permission of TOREX SEMICONDUCTOR LTD.

**TOREX SEMICONDUCTOR LTD.**