


Series: V-Thinity V/H/7/8

Description: In Building Public Safety

Antenna 132-174 / 380-570 / 700-960 MHz

PART NUMBER: PSIBVU78

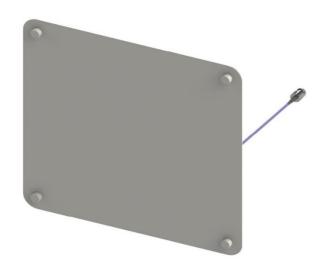



Installed Antenna

Features:

- Wide Bandwidth VHF, UHF, 7/800
 - 132-174 MHz
 - 380-570 MHz
 - 700-960 MHz
- Aesthetically pleasing:
 - 1.5mm (0.060 inch) thickness to ceiling.
- VSWR < 2:1
- Optimized to low frequency inbuilding environments.

Applications:

- In Building Repeater Systems
 - · Bi-Directional Amplifiers
- Police, Fire, Government critical communication enhancement
- Low-profile ceiling mounting
- Enhanced for In-building:
 - Modest Gain
 - · Multi-Floor coverage
 - Avoid nulls of traditional dipoles.

All dimensions are in mm / inches

Issue: 1651

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Series: V-Thinity V/H/7/8

Description: In Building Public Safety Antenna 132-174 / 380-570 / 700-960 MHz

PART NUMBER: PSIBVU78

ELECTRICAL SPECIFICATIONS

Frequency 132-174 / 380-570 / 700-960 MHz

Nominal Impedance 50Ω

VSWR 2:1*

Power Withstand 6 watts

Connector Type N Female

Cable Type Ø 4mm / 0.16"

Cable length 500mm / 19.7"



^{*}antenna mounted against ceiling tile with 2ft x 2ft metal suspension frame



Series: V-Thinity V/H/7/8

Description: In Building Public Safety

Antenna 132-174 / 380-570 / 700-960 MHz

PART NUMBER: PSIBVU78

MECHANICAL SPECIFICATIONS.

Color White

Weight: 675 grams

Cable retention: Pull off 30 N

Fixing system 4pcs M6 hex slot bolt & nut

ENVIRONMENTAL SPECIFICATIONS

Operating temperature 0 - 60° C

Storage temperature MIL STD 801G: 24h at

85C and 24h at -40C

Temperature shock MIL STD 810G: Method

503.5, -40 for 1 hr to +85

C for 1 hr @ 15

deg.C/min rate of change;

3 cycles

Humidity MIL STD 810G: 24h at

60C and 95%RH

Vibration MIL STD 810G: 514.6 C-II

Chemical resistance MIL STD 810G

Drop test Top, bottom, side. 3

times/orientation, 40"

Package drop All faces & corners, 40"

Issue: 1651






Series: V-Thinity V/H/7/8

Description: In Building Public Safety Antenna 132-174 / 380-570 / 700-960 MHz

PART NUMBER: PSIBVU78

MECHANICAL DRAWING

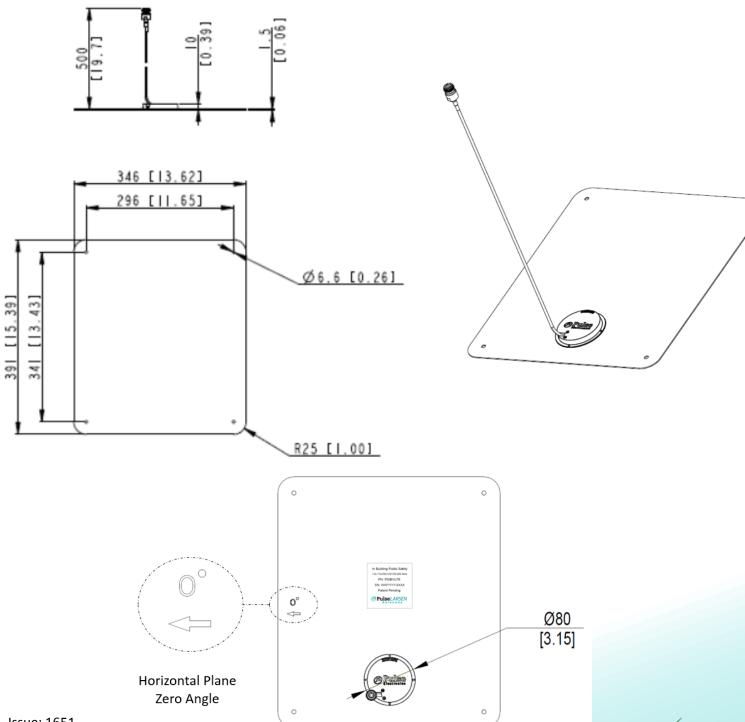

Issue: 1651

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Series: V-Thinity V/H/7/8


Description: In Building Public Safety Antenna 132-174 / 380-570 / 700-960 MHz

PART NUMBER: PSIBVU78

CHARTS - antenna mounted against ceiling tile with 2ft x 2ft metal suspension frame

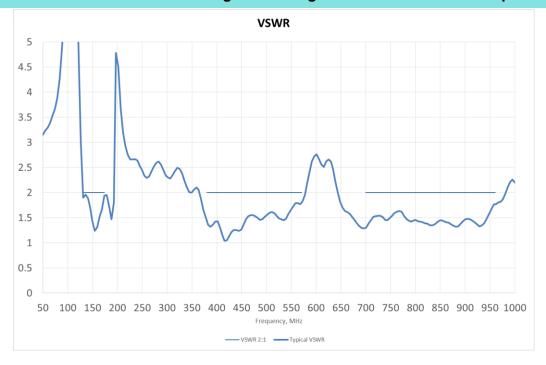

Total efficiency, % - 132-174MHz

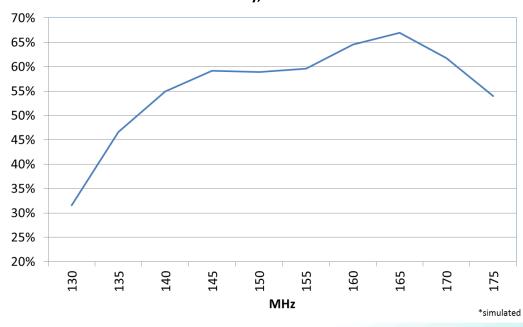






Series: V-Thinity V/H/7/8

Description: In Building Public Safety Antenna 132-174 / 380-570 / 700-960 MHz


PART NUMBER: PSIBVU78

CHARTS - antenna mounted against ceiling tile with 2ft x 2ft metal suspension frame

Total efficiency, % - 380-570MHz

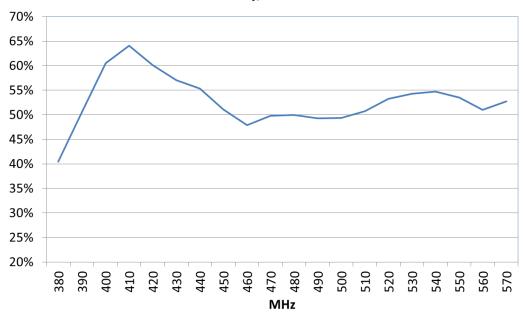

Total efficiency, % - 700-960MHz

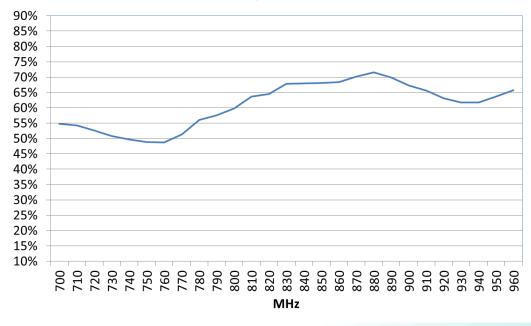

Issue: 1651




Series: V-Thinity V/H/7/8

Description: In Building Public Safety Antenna 132-174 / 380-570 / 700-960 MHz


PART NUMBER: PSIBVU78

CHARTS - antenna mounted against ceiling tile with 2ft x 2ft metal suspension frame

Vertical plane 132-174MHz

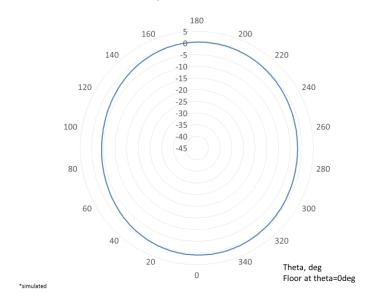

Horizontal plane 132-174MHz

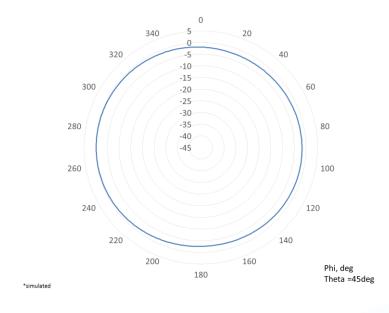




Series: V-Thinity V/H/7/8

Description: In Building Public Safety Antenna 132-174 / 380-570 / 700-960 MHz


PART NUMBER: PSIBVU78

CHARTS - antenna mounted against ceiling tile with 2ft x 2ft metal suspension frame

Vertical plane 380-570MHz

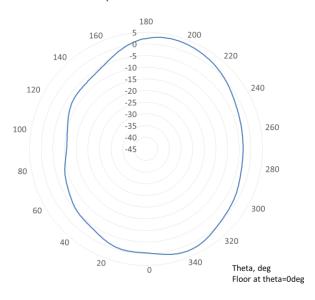

Horizontal plane 380-570MHz

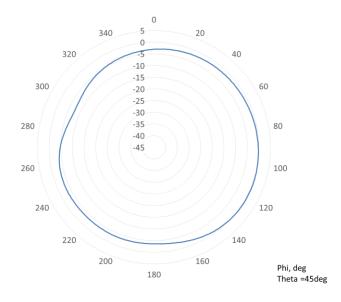






Series: V-Thinity V/H/7/8

Description: In Building Public Safety Antenna 132-174 / 380-570 / 700-960 MHz


PART NUMBER: PSIBVU78

CHARTS - antenna mounted against ceiling tile with 2ft x 2ft metal suspension frame

Vertical plane 700-960MHz

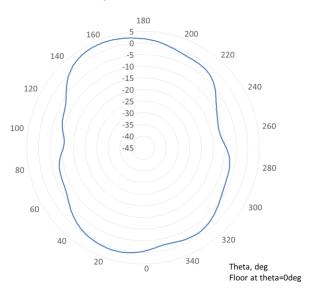

Horizontal plane 700-960MHz

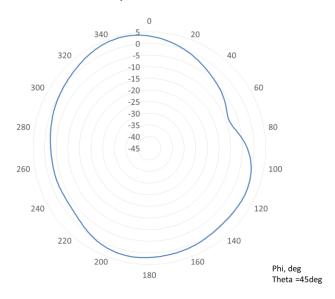

Issue: 1651





Series: V-Thinity V/H/7/8

Description: In Building Public Safety Antenna 132-174 / 380-570 / 700-960 MHz

PART NUMBER: PSIBVU78

ASSEMBLY Ø82.5-88.90 [3.25-3.50] Hole for Flush Mount <u>∅19.05 [0.75]</u> Hole for Spacer Mount 6.52 [0.26] 24.82 [0.98] **FLY NUT CEILING TILE SPACER** ANTENNA: **WASHER BOLT BOLT CAP**

Issue: 1651

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



^{*} Spacer to be used in gypsum & concrete installations



Series: V-Thinity V/H/7/8

Description: In Building Public Safety Antenna 132-174 / 380-570 / 700-960 MHz

PART NUMBER: PSIBVU78

Packaging

- Each antenna packed in a plastic bag and a single box
- 1 label on each antenna with Part number, Description, Serial number, date code
- 34 single boxes of antennas packed in a master carton.
- 1 label on each carton with Qty, Part number, Date code.

