

IRDC3622S

USER GUIDE FOR CURRENT SHARING IRDC3622S EVALUATION BOARD USING IRF6622 AND IRF6678 DIRECTFET MOSFETS

Table of Contents

	Page
Description	2
Board Features	2
Connections & Operating Instructions	3
Layout	5
Schematic	10
Bill of Materials	11
Waveforms	12
MLPQ Package	20

USER GUIDE FOR CURRENT SHARING IRDC3622S EVALUATION BOARD USING IRF6622 AND IRF6678 DIRECTFET MOSFETS

DESCRIPTION

This user guide contains the schematic and bill of materials for the IRDC3622S evaluation board. The guide describes operation and use of the evaluation board itself. The IR3622 IC is a dual channel synchronous buck controller, providing a cost-effective, high performance and flexible solution. The two channels can be configured to either two independent outputs or current sharing single output. The current share configuration is ideal for high current applications.

Key features offered by the IR3622 include configurable dual output, output voltage tracking, power up/down sequencing, programmable soft-

start ramp, pre-bias start-up, latched over-voltage protection, thermal protection, accurate reference voltage, on-board regulator, threshold sensitive Enable input, programmable switching frequency up 600kHz and input under-voltage lockout for proper start-up.

An output over-current protection function and a hiccup current limit are implemented by sensing the voltage developed across the on-resistance of the synchronous rectifier MOSFET for optimum cost and performance. Detailed application information for the IR3622 integrated circuit is available in the IR3622 data sheet.

BOARD FEATURES

- The board is designed for 1.8V output up to 60A load using IR3622 in current share configuration.
- $V_{IN} = +12V, (13.2V \text{ Max})$
- $V_o = +1.8V \pm 3\% @ 60A$
- $V_o(\text{ripple}) = 50\text{mV}$ maximum
- $F_s = 375\text{kHz}$
- $L = 270\text{nH}$ (10x10mm)
- $C_o = 4 \times 220\mu\text{F}$ (SP) + $10 \times 10\mu\text{F}$ (ceramic 0805)
- Two 10x10mm inductors combined with 4x220 SP capacitors and 10x10uF ceramic capacitors form a compact solution.
- The input voltage start threshold of the converter is set about 10V using enable pin and two external resistors (R22B1 and R22B2).
- The converter has the option to sequence with other supplies using SEQ and Track pins (R6B1, R22B3 and R22B4). These pins are pulled high as default.

CONNECTIONS and OPERATING INSTRUCTIONS

Input Supplies Connection:

Two supplies are required for this board, 3.3V and 12V. Both supplies should be well regulated. The 3.3V supplies the pull-up resistor for Power Good. The Track and Seq pins are also pulled high using 3.3V. Connect the 3.3V supply to TP3(+) and TP4(Gnd). The 12V supply is the bus voltage; It also biases IR3622 IC and should be able to source 15A current. Connect this supply either to 8-pin connector (J1B) or solder other connectors, such as banana jacks, to the exposed pads.

Note: For correct start up the 3.3V supply needs to be powered first.

Output Load Connection:

The load can be connected to the large screw-terminals or solder other connectors such as banana jacks, to the exposed pads.

Table I. Connections

Signal Name	Connection
+3.3V Supply	TP3
Ground of the 3.3V Supply	TP4
V_{IN} (+12V)	J1B
Ground of V_{IN}	
V_{OUT} (+1.8V)	TB1B, TB2B
Ground of V_{OUT}	TB3B, TB4B

CONNECTION DIAGRAM

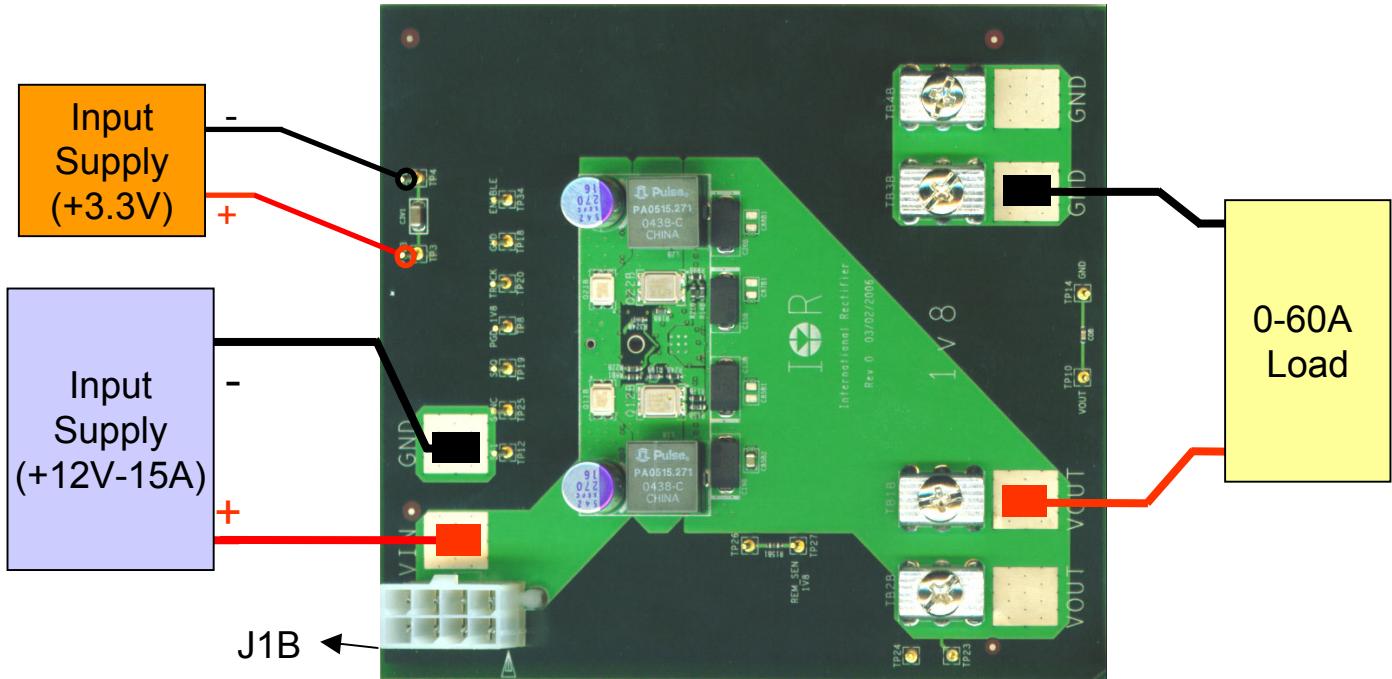


Fig. 1: Connection diagram of the IRDC3622S evaluation board.

Test Points

Input, output, and control signals are accessible through test points as listed in Table II.

Table II. Test Points

Test Point	Signal Name	Description
TP12	SS1	Soft Start
TP25	SYNC	External Synchronization Signal
TP19	SEQ	Enable input for Sequence and Tracking
TP8	PGD_1V8	Power Good output
TP20	TRACK	Sets the type of power up/down sequencing
TP18, TP24	GND	Ground
TP34	ENABLE	Enable input of the 3622 IC
TP10, TP14	V _{out}	Output voltage and Ground
TP26, TP27	REM_SEN1V8	Remote Sensing at Terminal Block, for Bode plot measurement
TP23	V _{out} Test	Test point for the output voltage

LAYOUT

The IRDC3622S is an eight-layer board. The top and bottom layers are 2 Oz. copper and the internal layers are 1 Oz. copper. The switching MOSFETs, Inductors, 270uF input capacitors, 220uF output capacitors, and some smaller passive components are mounted on the top side of the board. The IR3622 IC and the rest of passive components are mounted on the bottom layer. The DirectFET technology is used for MOSFETs.

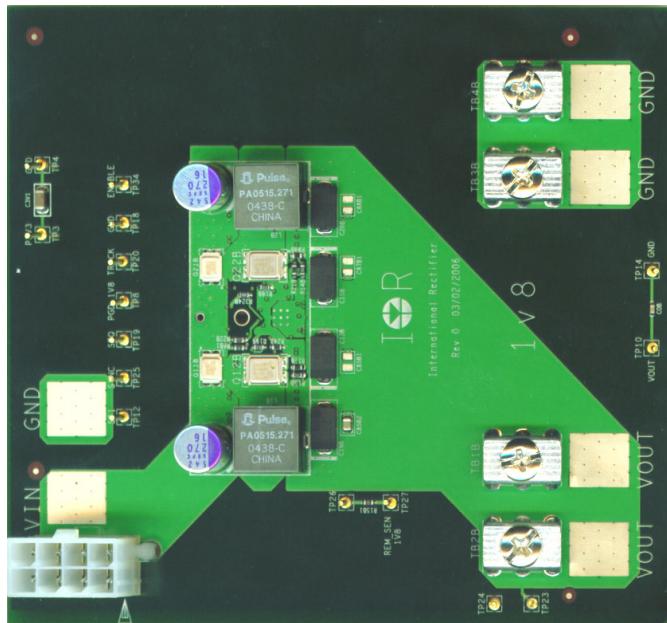


Fig. 2: Parts placement, top layer.

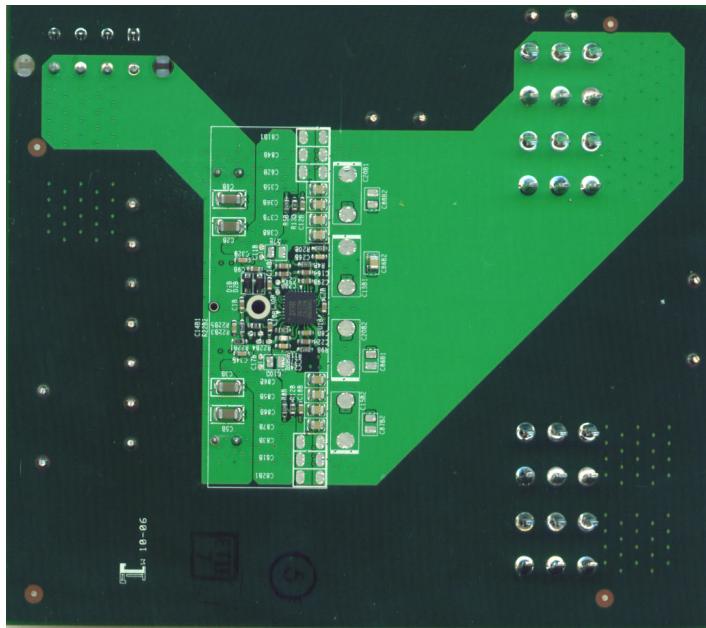


Fig. 3: Parts placement, bottom layer.

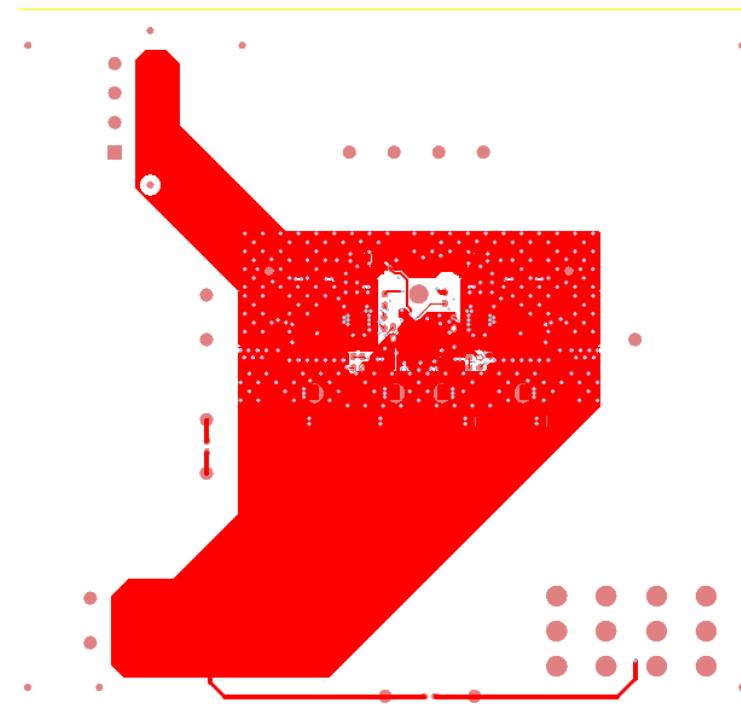


Fig. 4: Board layout, top layer.



Fig. 5: Board layout, mid layer 1.

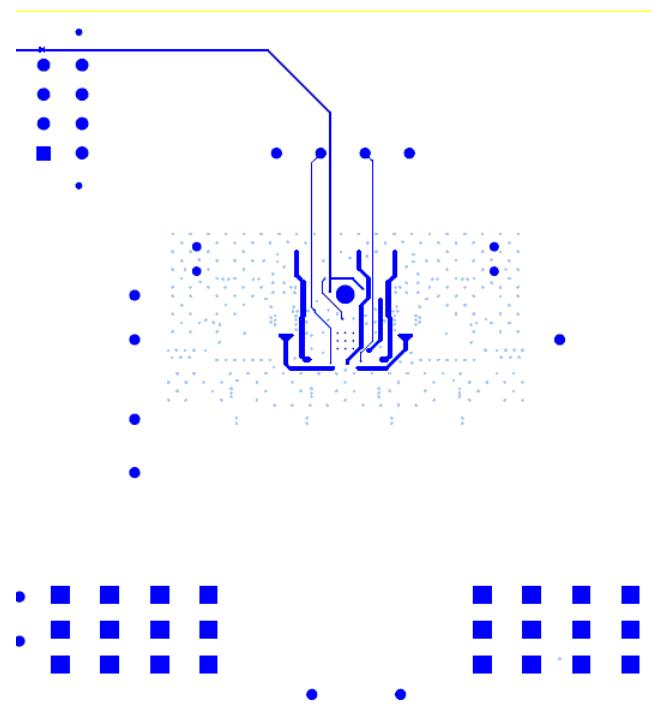


Fig. 6: Board layout, mid layer 2.

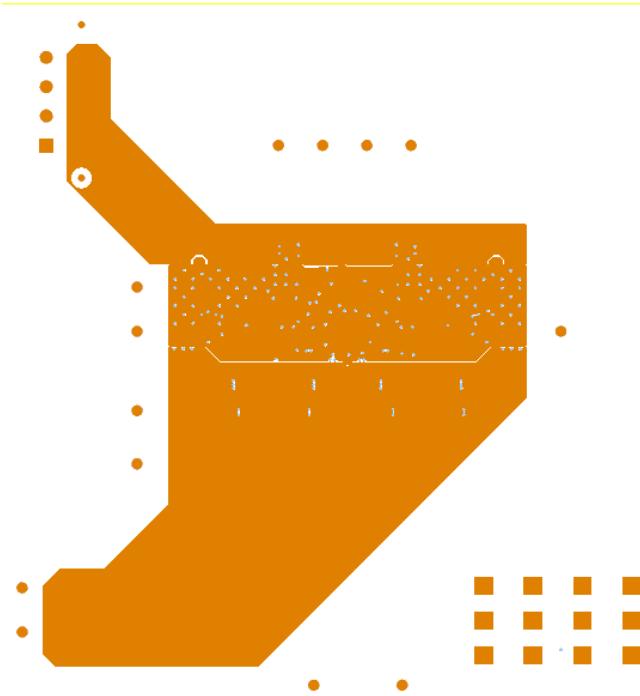


Fig. 7: Board layout, mid layer 3.



Fig. 8: Board layout, mid layer 4.

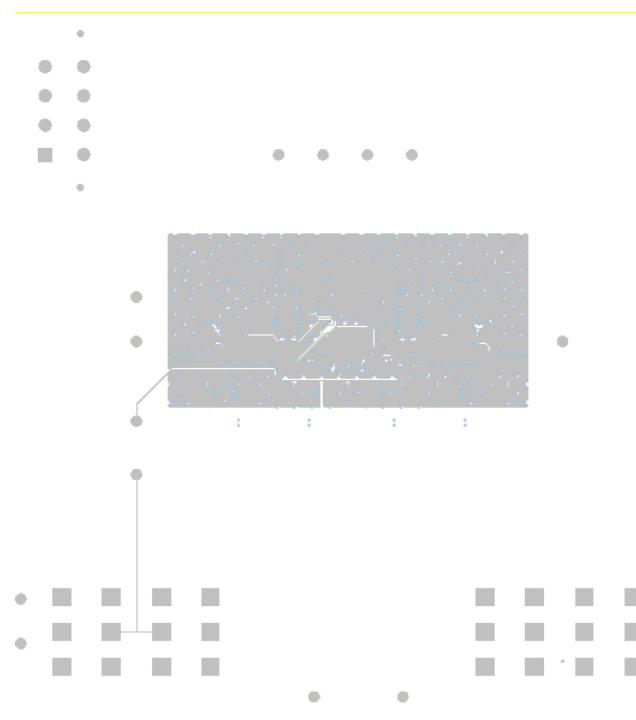


Fig. 9: Board layout, mid layer 5.

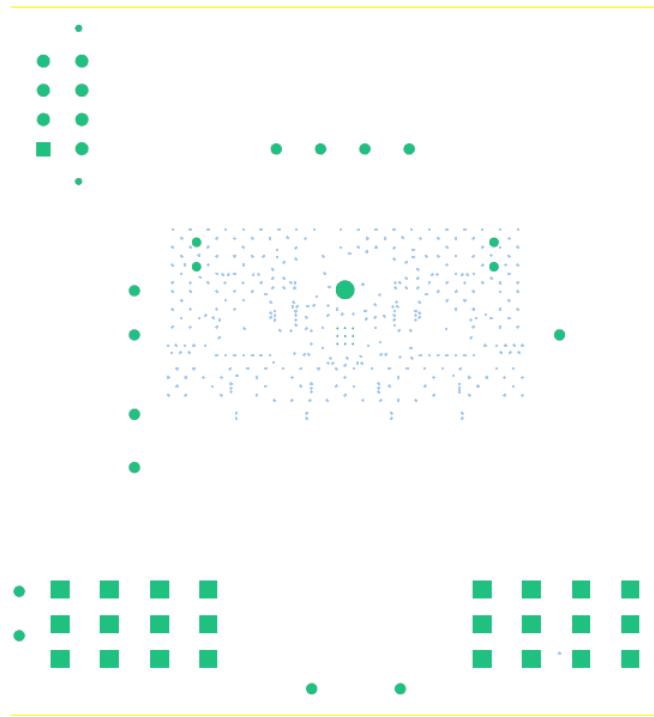


Fig. 10: Board layout, mid layer 6.

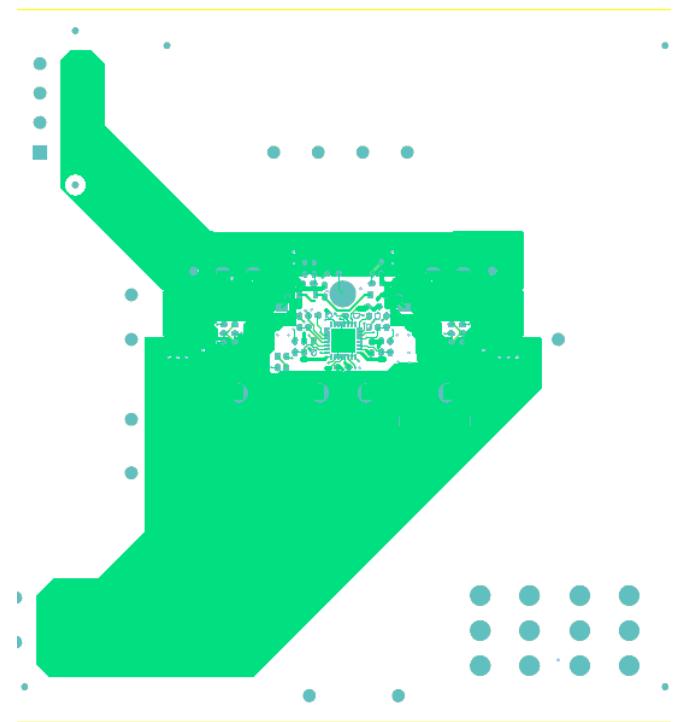


Fig. 11: Board layout, bottom layer.

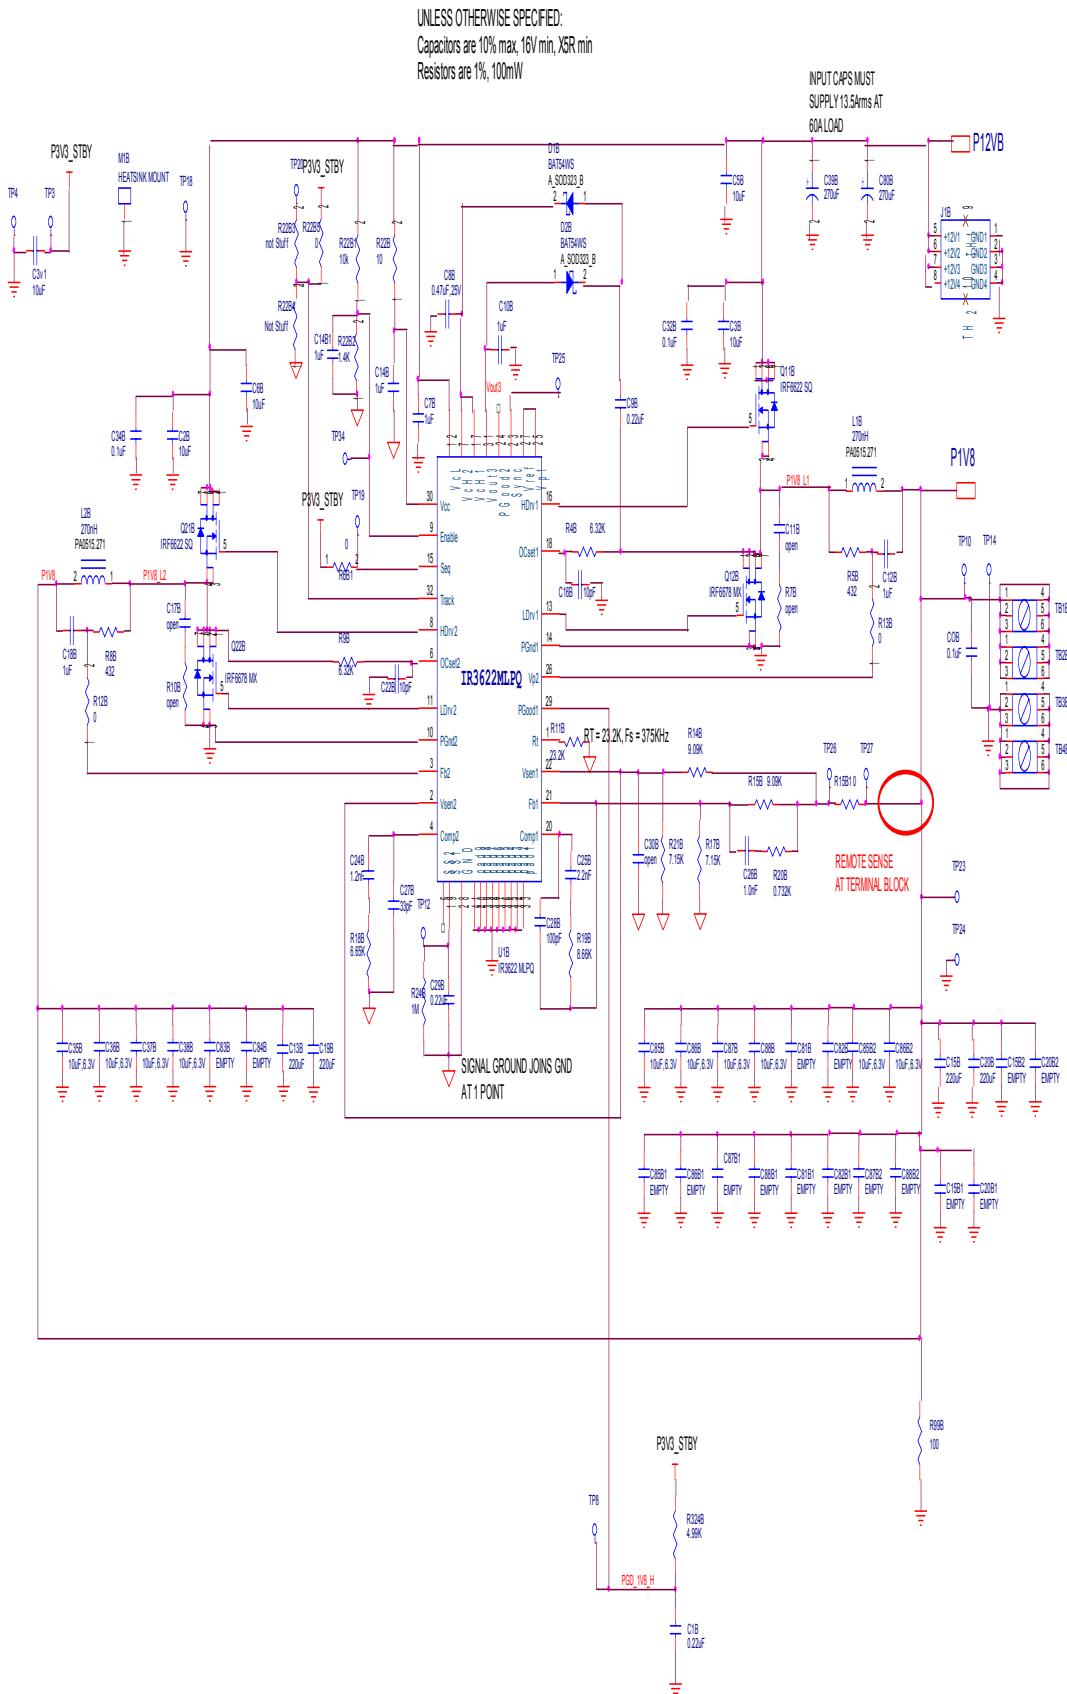


Fig. 12: Schematic of the IRDC3622S board.

BILL OF MATERIALS

Item	Qty	Reference	Value	Description	PCB Footprint	Manufacturer	Part Number
1	3	C32B, C34B, COB	0.1uF	0.1uF-0603-25V-X7R-10%	A_MC-0603	Panasonic	ECJ1VB1E104
2	1	C30B	Open		A_MC-0603		
3	5	C2B, C3B, C5B, C6B, C3v1	10uF	10uF-1206-16V-X7R-20%	A_MC-1206	Murata	GRM31CR61C106KC31L
4	6	C7B, C10B, C12B, C14B, C18B, C14B1	1uF	1uF, 0603, 16V, X7R- 10%	A_MC-0603	Murata	GRM188R71C105KA12D
5	1	C8B	0.47uF	0.47uF-0603-25V-X7R-10%	A_MC-0603	Murata	GRM188R71E474KA12D
6	3	C1B, C9B, C29B	0.22uF	0.22uF-0603-16V-X7R-10%	A_MC-0603	Panasonic	ECJ1VB1C224
7	2	C1B, C17B	Open		A_MC-0603		
8	4	C13B, C15B, C19B, C20B	220uF	220uF-D4-2V-9mOhm-SP	A_MC-6MM	Panasonic	EEFSX0D221R
9	2	C16B, C22B	10pF	10pF-0603-50V-C0G-5%	A_MC-0603	Panasonic	ECJ1VC1H100D
10	1	C24B	1.2nF	1200pF-0603-50V-X7R-10%	A_MC-0603	Panasonic	ECJ1VB1H122K
11	1	C25B	2.2nF	2200pF-0603-50V-X7R-10%	A_MC-0603	Panasonic	ECJ1VB1H222K
12	1	C26B	1.0nF	1000pF-0603-50V-X7R-10%	A_MC-0603	Panasonic	ECJ1VB1H102K
13	1	C27B	33pF	33pF-0603-50V-C0G-5%	A_MC-0603	Panasonic	ECJ1VC1H330J
14	1	C28B	100pF	100pF-0603-50V-C0G-5%	A_MC-0603	Panasonic	ECJ1VC1H101J
		C35B, C36B, C37B, C38B, C85B, C86B, C87B, C88B, C85B2, C86B2	10uF	10uF-0805-6.3V-X5R-10%	A_MC-0805	AVX	08056D106KAT2A
15	10	C39B, C80B	270uF	270uF-8mOhm-16V	A_MC138-336D	Sanyo	16SEPC270M
16	2	C81B, C81B1, C82B, C83B, C84B, C82B1	Open		A_MC-1206		
17	6	C15B1, C15B2, C20B1, C20B2	Open		A_MC-6MM		
18	4	C85B1, C86B1, C87B1, C87B2, C88B1, C88B2	Open		A_MC-0805		
19	6	D1B, D2B	BAT54WS	Schottky, SOD323, 30V, 0.2A	A_SOD323_B	IR	BAT54WS
20	1	J1B	ATX8PINS	CONN,8 Pins,2 Rows	PWR2X4	Molex	39299082
21	2	L1B, L2B	270nH		A_INDUCT-515	Pulse	PA0515.271
22	2	Q1B, Q2B1	IRF6622 SQ	IRF6622 SQ 25V	IR_DIRFET_SQ	IR	IRF6622
23	2	Q1B2, Q22B	IRF6678 MX	IRF6678 MX 30V	IR_DIRFET_MX	IR	IRF6678
24	1	R324B	4.99K	RES, 0603, 1%, 1/10W	A_CR-0603	Rohm	MCR03EZPFX4991
25	2	R4B, R9B	6.34K	RES, 0603, 1%, 1/10W	A_CR-0603	Rohm	MCR03EZPFX6341
26	2	R5B, R8B	432	RES, 0603, 1%, 1/10W	A_CR-0603	Rohm	MCR03EZPFX4320
27	2	R7B, R10B	Open		A_CR-0805		
28	1	R11B	23.2K	RES, 0603, 1%, 1/10W	A_CR-0603	Rohm	MCR03EZPFX2322
29	5	R12B, R13B, R6B1,R15B1,R22B5	0	RES, 0603, 1%, 1/10W	A_CR-0603	Rohm	MCR03EZPJ000
30	1	R14B	9.09K	RES, 0603, 1%, 1/10W	A_CR-0603	Rohm	MCR03EZPFX9091
31	1	R15B	9.09K	RES, 0603, 1%, 1/10W	A_CR-0603	Rohm	MCR03EZPFX9091
32	1	R15B	10	RES, 0603, 1%, 1/10W	A_CR-0603	Panasonic	ERJ-3EKF10R0V
33	1	R22B	100	RES, 0603, 1%, 1/10W	A_CR-0603	Rohm	MCR03EZPFX1000
34	1	R99B	7.15K	RES, 0603, 1%, 1/10W	A_CR-0603	Rohm	MCR03EZPFX7151
35	1	R17B, R21B	6.65K	RES, 0603, 1%, 1/10W	A_CR-0603	Rohm	MCR03EZPFX6651
36	1	R18B	8.66K	RES, 0603, 1%, 1/10W	A_CR-0603	Rohm	MCR03EZPFX8661
37	1	R19B	732	RES, 0603, 1%, 1/10W	A_CR-0603	Rohm	MCR03EZPFX7320
38	1	R20B	1M	RES, 0603, 1%, 1/10W	A_CR-0603	Yageo	RC0603FR-071ML
39	1	R24B	10k	RES, 0603, 1%, 1/10W	A_CR-0603	Yageo	RC0603FR-0710KL
40	1	R22B1	1.4K	RES, 0603, 1%, 1/10W	A_CR-0603	Panasonic	ERJ-S03F1401V
41	2	R22B3, R22B4	Open		A_CR-0603		
42	4	TB1B, TB2B,TB3B, TB4B	T. BLOCK 1 PIN	Terminal block	TB_1_0	Keystone	8197
43	15	TP3, TP4, TP8, TP10, TP12, TP14, TP18, TP19, TP20, TP23, TP24, TP25, TP26, TP27, TP34	TP	Testpoint	V1054_ND	Vector	K24A/M
44	1	U1B	IR3622 MLPQ	Controller	A_MLPQ32-0P5MM_VIA_A	International Rectifier	IR3622
45	1	Heat Sink	26.65 x 19.48 x 22.48 (L x W x H) (mm)			ThermaFlo	7201599
46	2	TIM1B, TIM2B	Thermal Interface Material	10.20 x 19.12 (L x W) (mm)		Bergquist	BG420753
47	1	SCRW1B	Philips Pan Head Screw	Stainless A-2(18-8), 2mm x .4 x 5mm		Bolt Depot	6812

TYPICAL OPERATING WAVEFORMS

V_{in}=12V, V_o=1.8V, I_o=0-60A, F_s=375 kHz, Room Temperature, No Air Flow

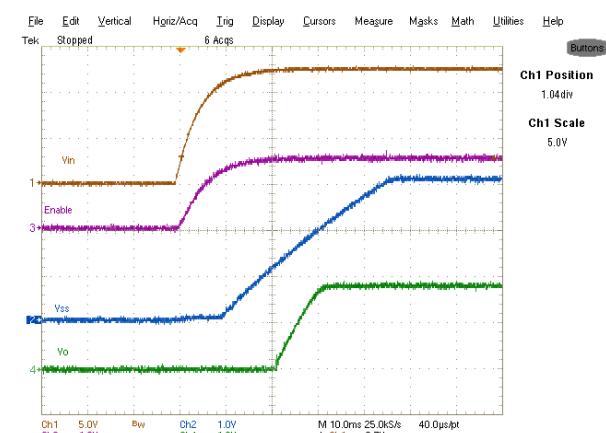
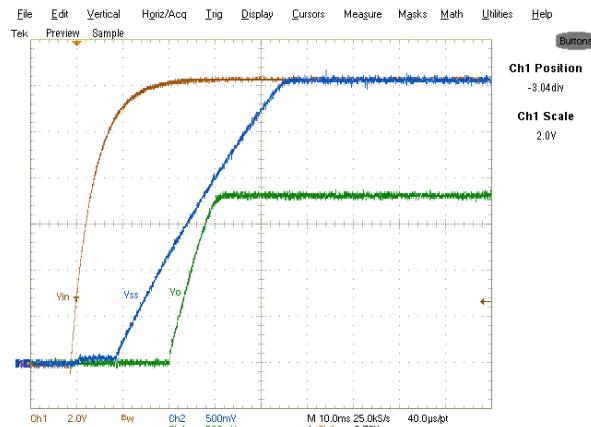


Fig. 13: Start-up sequence at no load.
Ch₁: V_{in}, Ch₂: V_{ss}, Ch₃: PGood, Ch₄: V_o

Fig. 14: Start-up sequence into 60A load.
Ch₁: V_{in}, Ch₂: Enable, Ch₃: V_{ss}, Ch₄: V_o

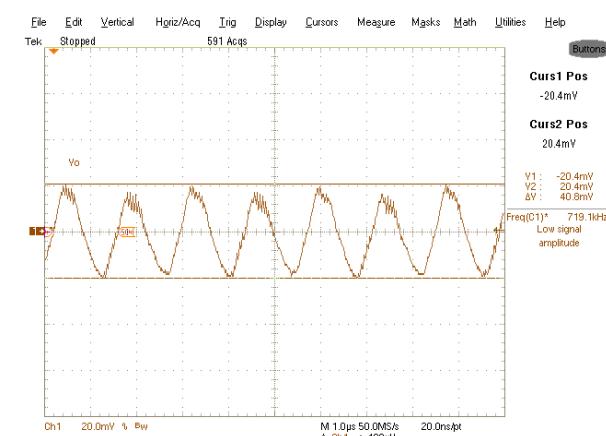
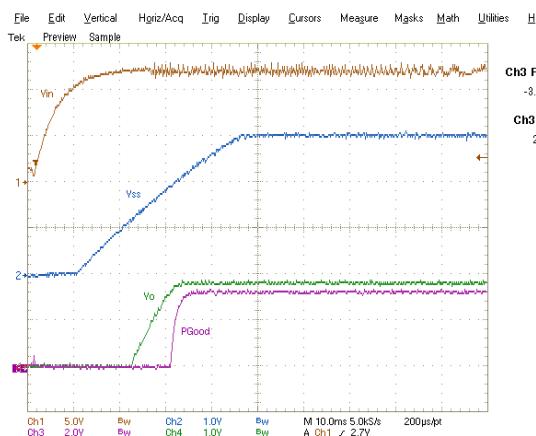


Fig. 15: Start-up sequence into 60A load.
Ch₁: V_{in}, Ch₂: V_{ss}, Ch₃: PGood, Ch₄: V_o

Fig. 16: Output Voltage ripple at 40 A.

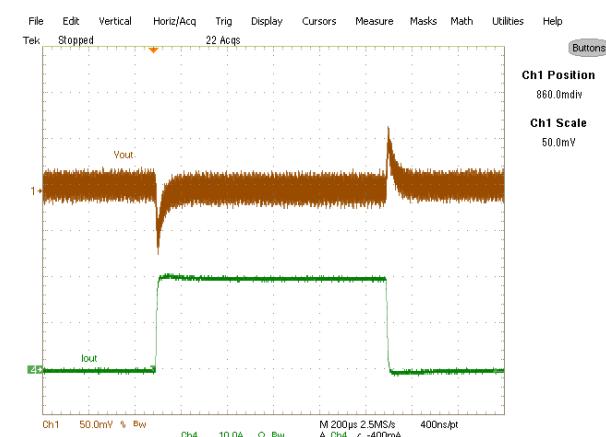
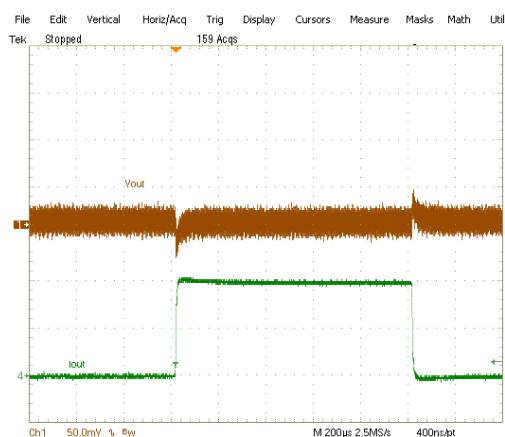


Fig. 17: Transient response.
Ch₁: V_o, Ch₄: I_o (0-10A)

Fig. 18: Transient response.
Ch₁: V_o, Ch₄: I_o (0-20A)

TYPICAL OPERATING WAVEFORMS

V_{in}=12V, V_o=1.8V, I_o=0-60A, F_s=375 kHz, Room Temperature, No Air Flow

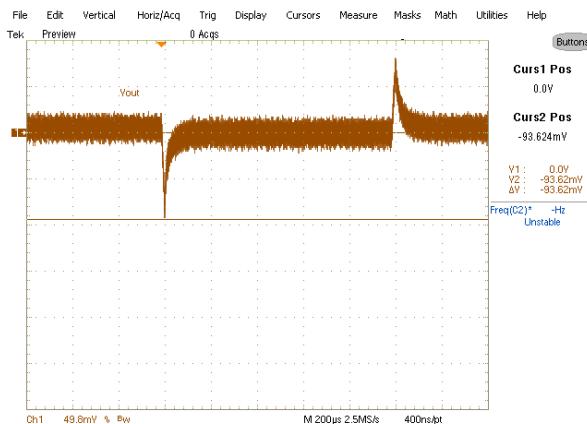


Fig.19: Transient response I_{out}(0-30A).
Ch1: V_{out}

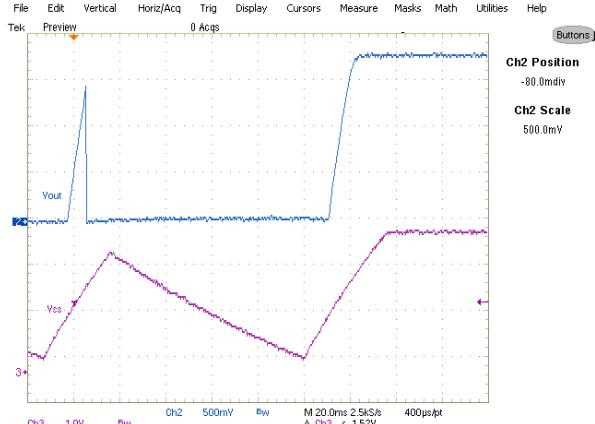


Fig. 20: Transition from hiccup to normal operation. Ch₂: V_{out}, Ch₃: V_{ss}

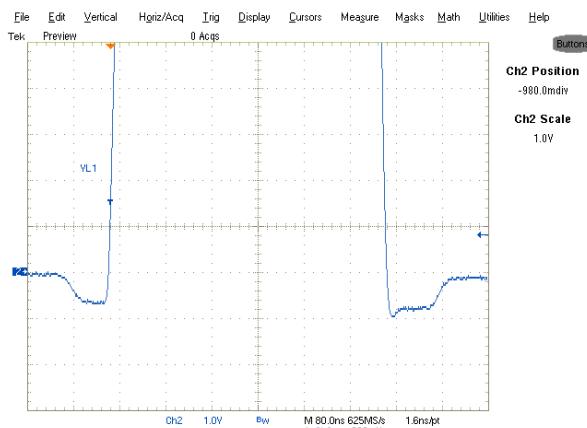


Fig. 21: Dead-times on V_{L1} at 40A.

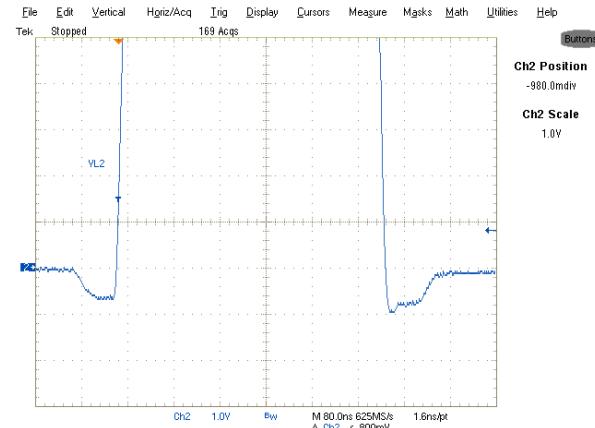


Fig. 22: Dead-times on V_{L2} at 40 A.

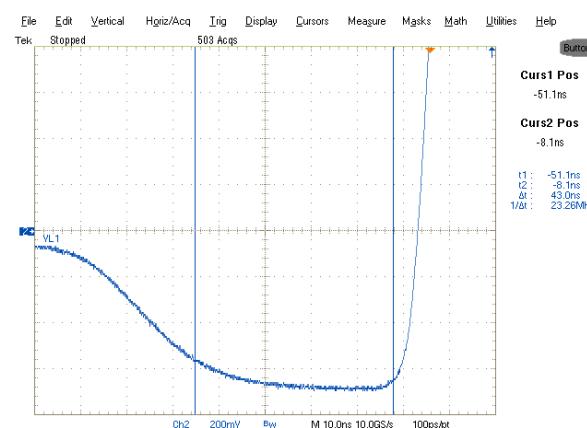


Fig. 23: V_{L1}-turn-on dead-time at 40A.







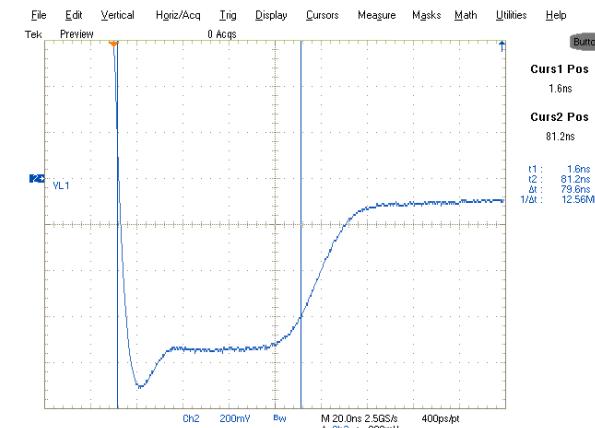


Fig. 24: V_{L1}-turn-off dead-time at 40A.

TYPICAL OPERATING WAVEFORMS

V_{in}=12V, V_o=1.8V, I_o=0-60A, F_s=375 kHz, Room Temperature, No Air Flow

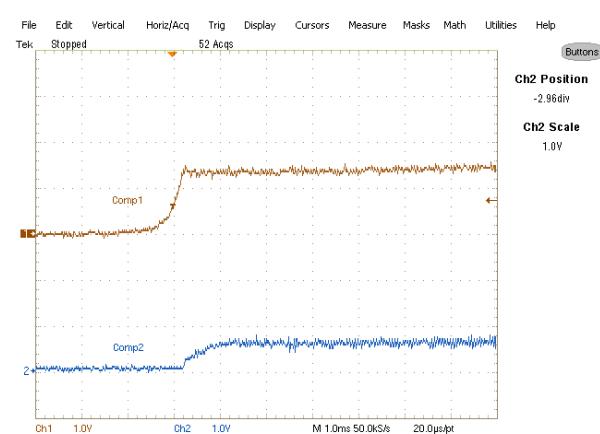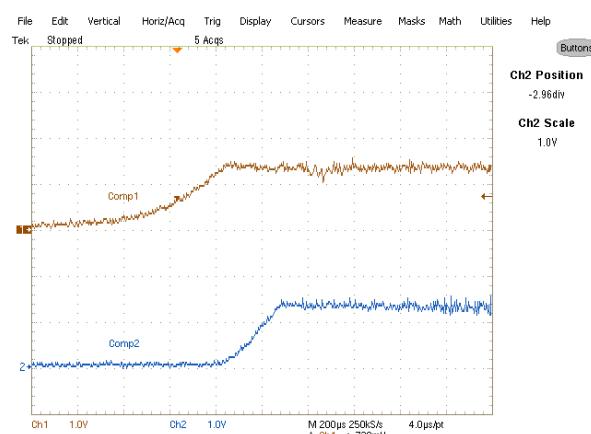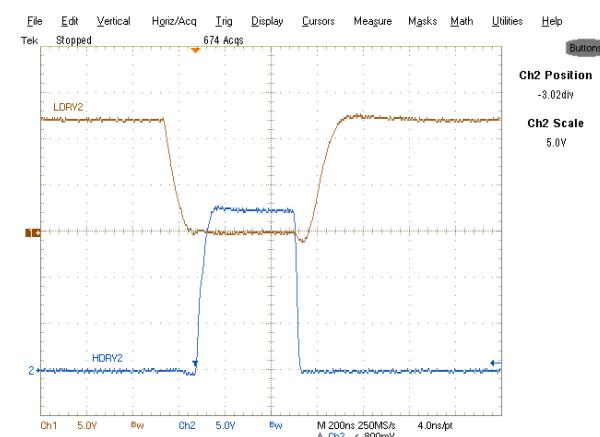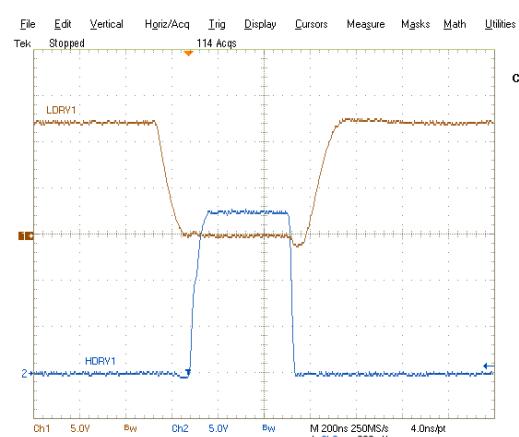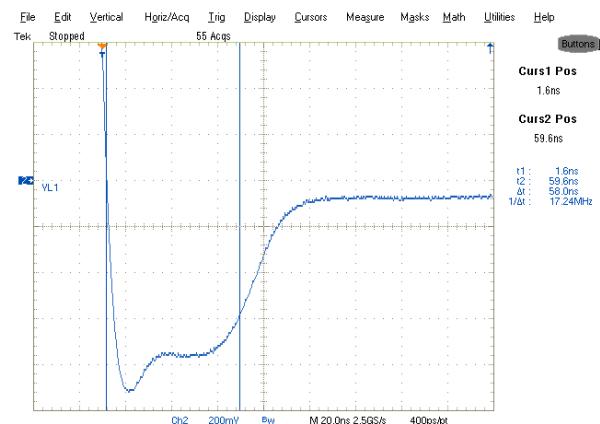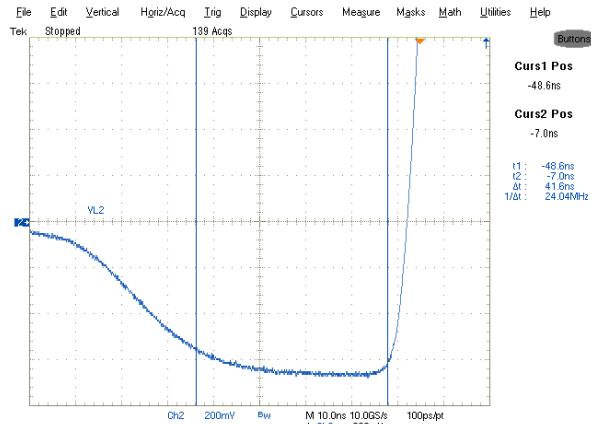

TYPICAL OPERATING WAVEFORMS

V_{in}=12V, V_o=1.8V, I_o=0-60A, F_s=375 kHz, Room Temperature, No Air Flow

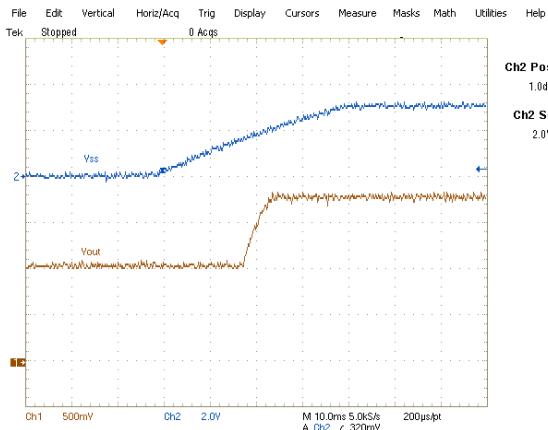


Fig. 31: Pre-bias test at 1V.

Ch₁: V_{out}, Ch₂: V_{ss}

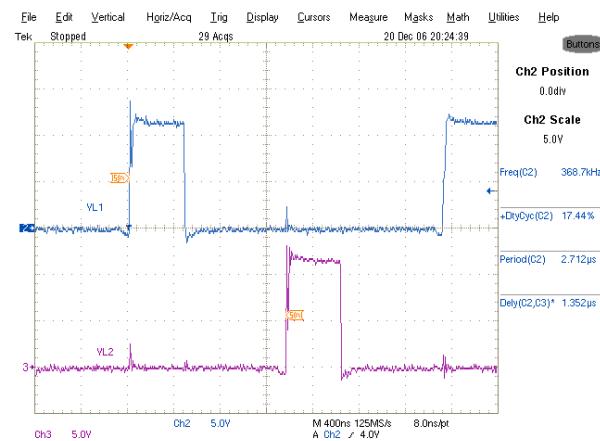


Fig. 32: Inductor points at 60A load.

Ch₂: V_{L1}, Ch₃: V_{L2}

TYPICAL OPERATING WAVEFORMS

V_{in}=12V, V_o=1.8V, I_o=0-60A, F_s=375 kHz, 45°C Ambient Temperature, 200LFM Air Flow

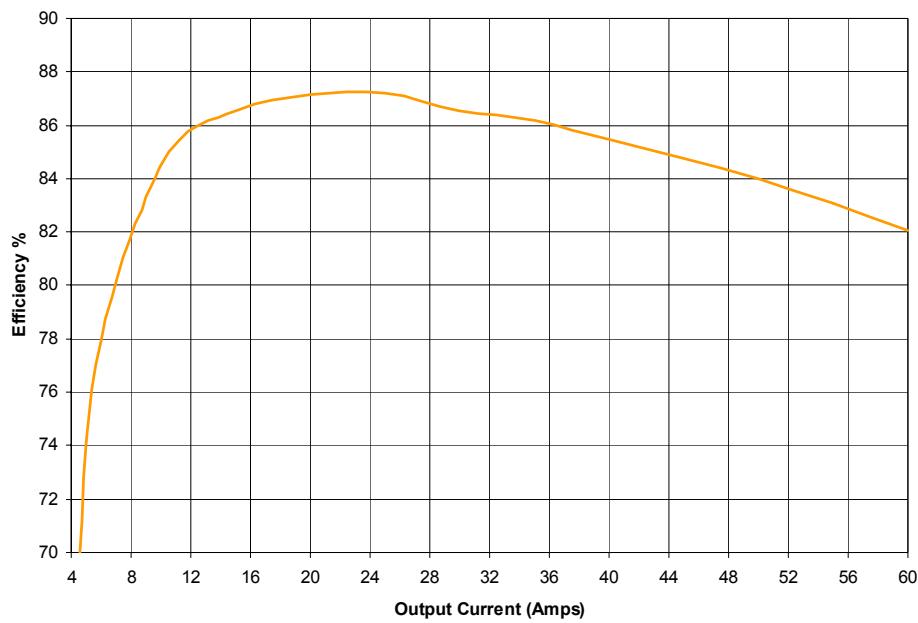


Fig. 33: Efficiency versus load current at 45°C with heat sink and 200LFM air flow.

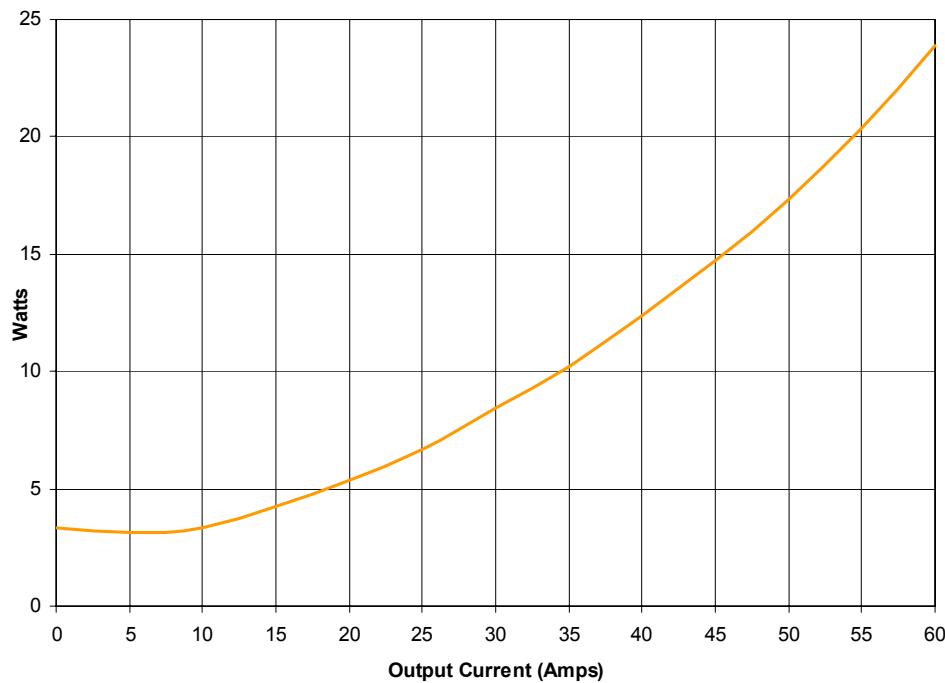


Fig. 34: Power loss versus load current at 45°C with heat sink and 200LFM air flow

TYPICAL OPERATING WAVEFORMS

V_{in}=12V, V_o=1.8V, I_o=0-60A, F_s=375 kHz, Room Temperature, No Air Flow

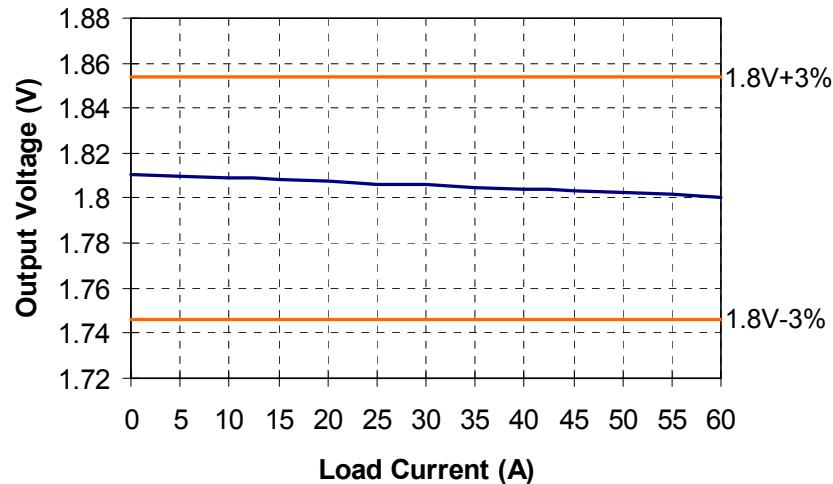


Fig. 35: Output voltage versus load current.

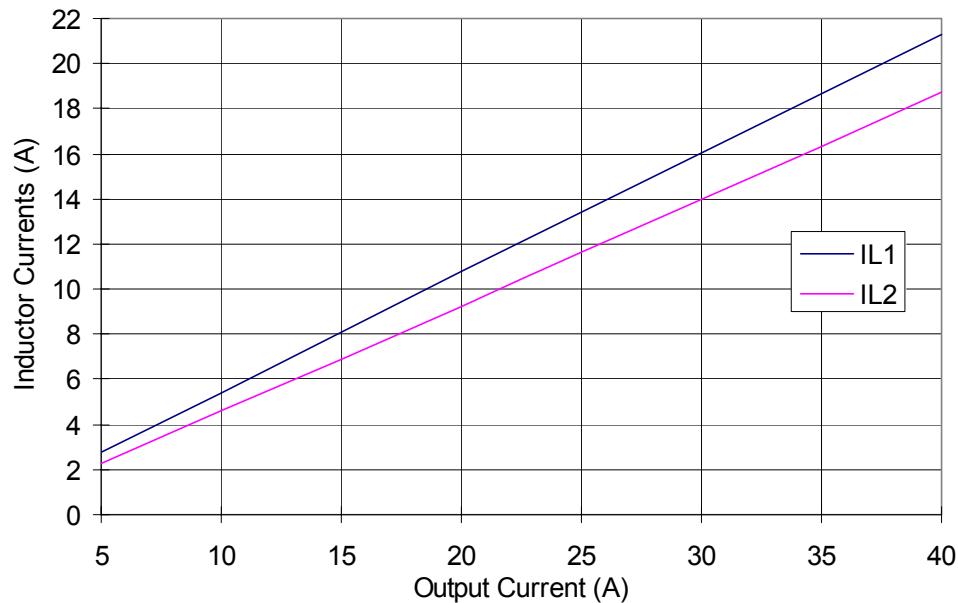


Fig. 36: Current Sharing of the phases versus load current.

TYPICAL OPERATING WAVEFORMS

V_{in}=12V, V_o=1.8V, I_o=0-60A, F_s=375 kHz, Room Temperature, No Air Flow

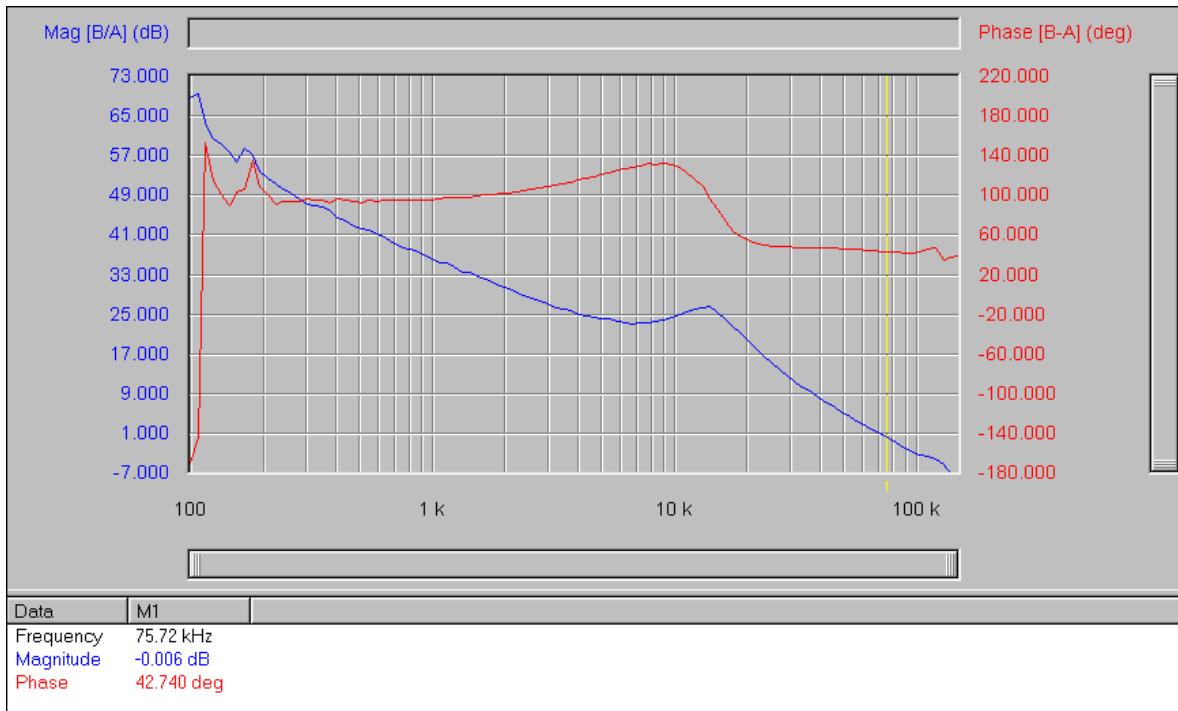


Fig. 37: Bode Plot at 20 A load shows a bandwidth of 75kHz and phase margin of 42.7 degree.

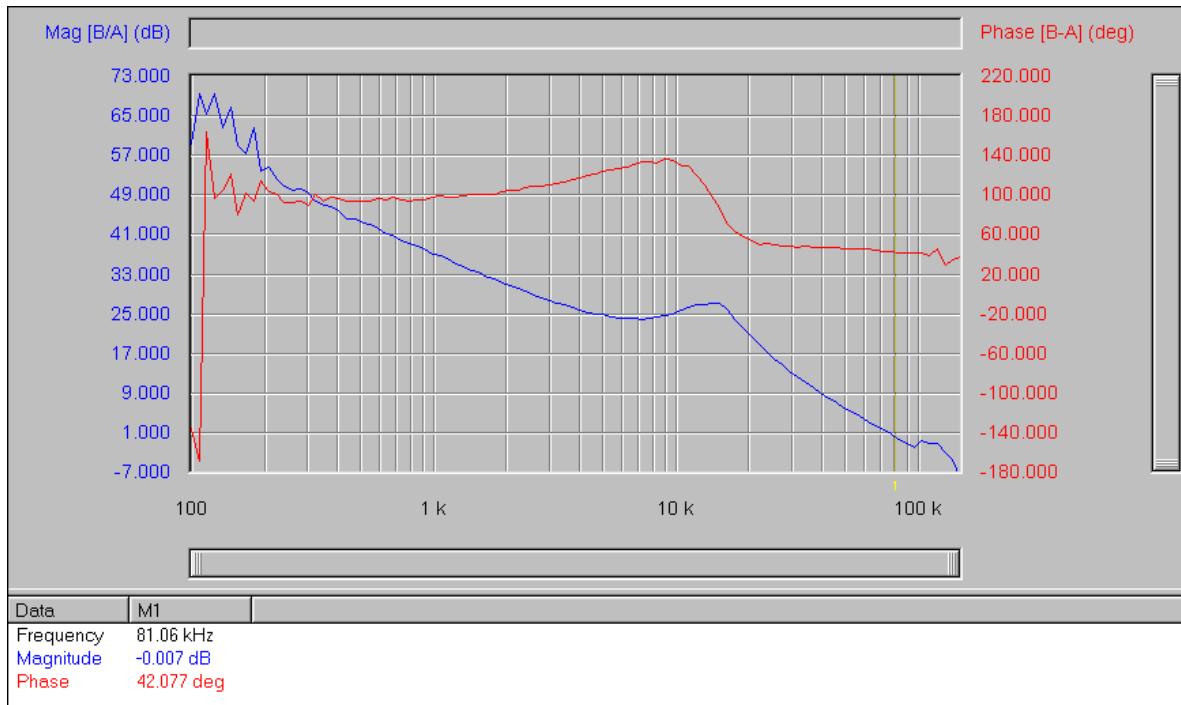


Fig. 38: Bode Plot at 40 A load shows a bandwidth of 81kHz and phase margin of 42.1 degree.

TYPICAL OPERATING WAVEFORMS

V_{in}=12V, V_o=1.8V, I_o=0-60A, F_s=375 kHz, Room Temperature, No Air Flow


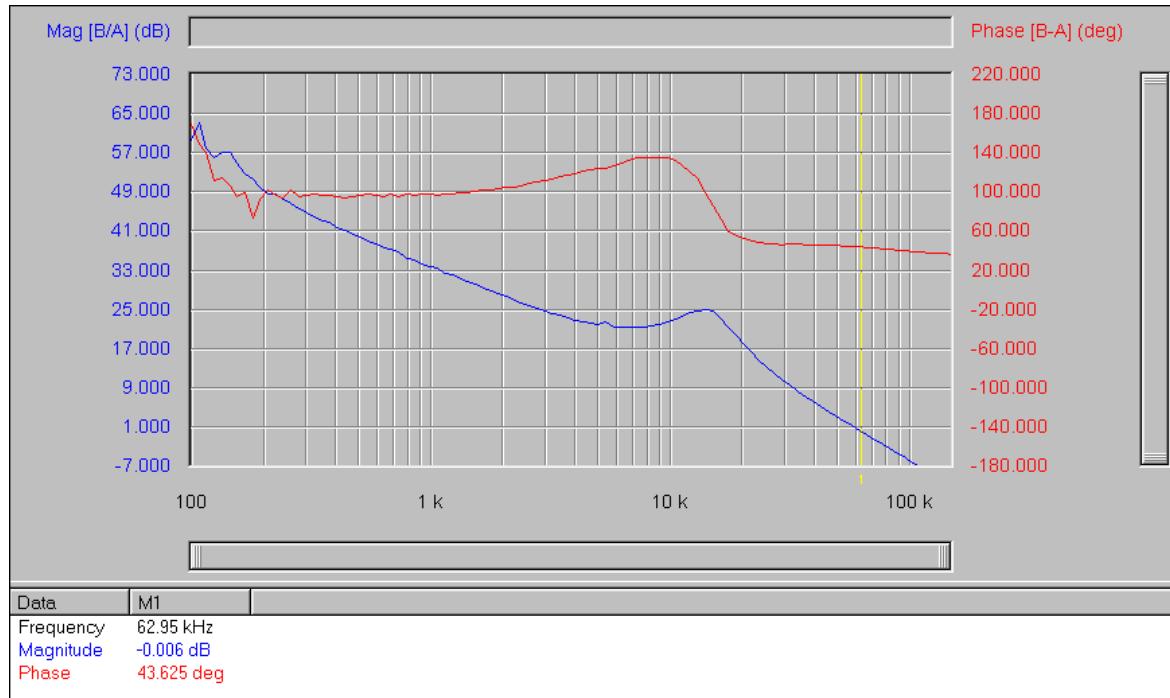


Fig. 39: Bode Plot at 60 A load shows a bandwidth of 62.9kHz and phase margin of 43.6 degree.



Fig. 40: Thermal Image at 60 A load, without heatsink, and with no air flow, Test Points are Synchronous Rectifier DirectFETs.


(IR3622M) MLPQ Package; 5x5-32 Lead

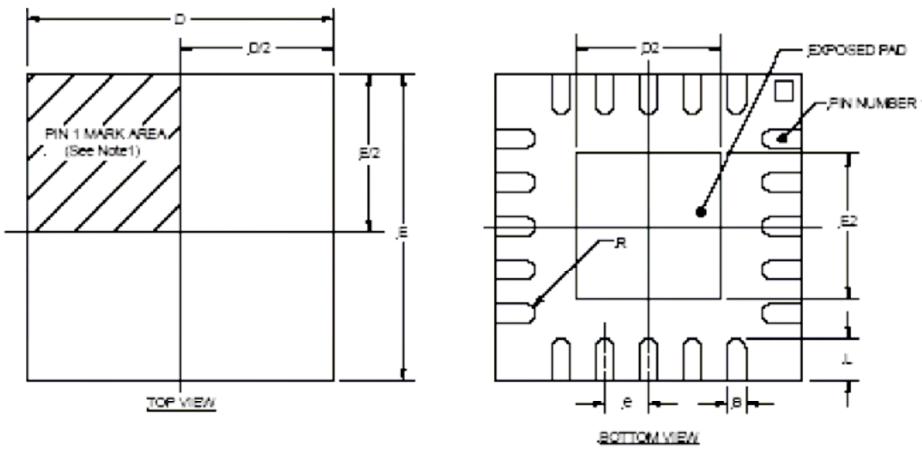

Note 1: Details of pin #1 are optional, but must be located within the zone indicated. The identifier may be molded, or marked features.

SYMBOL	32-PIN 5x5			
	DESIG	MIN	NOM	MAX
A		0.80	0.90	1.00
A1		0.00	0.02	0.05
A3		0.20 REF		
B		0.18	0.23	0.30
D		5.00 BSC		
D2		3.30	3.45	3.55
E		5.00 BSC		
E2		3.30	3.45	3.55
e		0.50 BSC		
L		0.30	0.40	0.50
R		0.09	---	---

NOTE: ALL MEASUREMENTS
ARE IN MILLIMETERS.

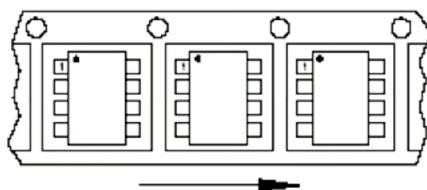

Feed Direction
Figure A

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903

This product has been designed and qualified for the Industrial market.

Visit us at www.irf.com for sales contact information
Data and specifications subject to change without notice. 1/23/2007