


● ● **ME 70-169**

**LICENCE-FREE SYSTEM**  
for Frequencies <1 GHz  
**Wireless M-Bus EN13757**

Embedded

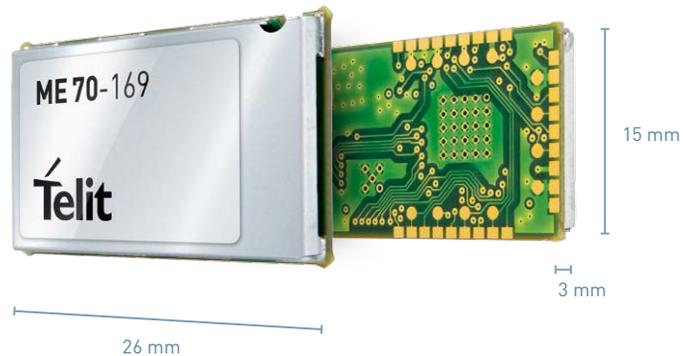

## Product Description

The Telit ME70-169 is a wireless M-Bus module compliant with the EN13757 part4 2013. It is ideally suited for use in one or two-way data links with gas, water, heat and electricity meters and concentrators.

For this band, on Tx power of up to 1 W, ME70-169 modules operate in 169 MHz band and runs Wireless M-Bus N mode protocol defined by EN13757 part 4 2013.

With ultra-low-power for maximum battery life and 150 dB budget link, ME70-169 is the prompt solution for gas and water meters applications.

- Telit-developed Wireless M-Bus stacks
- Very low power consumption
- Custom development and integration
- Certified RF modules, LGA xE Form Factor, TTL RS232 interface
- Excellent RX sensitivity
- Download Over The Air (DOTA)
- Industrial temperature range

## Key Benefits

- W M-Bus modes by Telit, leave integrators to work on applications
- Compliant with CIG Interchangeability Task Force TS 11291-11-4 & TS 11291-11-7
- The low-power, programmable ATX Mega can be used as platform for metering

## Family Concept

The Telit portfolio of short range wireless modules is comprised of a wide range of innovative solutions ranging from ready-to-use wireless radio modems to OEM modules and RF design services.

Operating in the license-free ISM frequency bands of 169, 433, 868, 915 MHz, and 2.4 GHz, they're available in both standard air-interface protocols such as wireless M-Bus and ZigBee as well as proprietary low-power, low data rate technologies.


Telit certified short range modules share small dimensions, form factor, and are pin2pin compatible with one-another, which enables re-use of your design with different modules and air interface technologies as needed to meet your business and environmental requirements. Telit also offers a full set of tools to shorten and streamline your design effort.

### Combine your Short Range module with

- Cellular modules



- GNSS modules



[www.telit.com](http://www.telit.com)



## ME70-169

### Product features

- Range: Up to 20 km
- Output Power: 12 dBm to 30 dBm
- 128 kB Flash, 8 kB RAM, 2 kB EEPROM
- 32.768 kHz real time clock (RTC), 4 timers
- Configurable output power

### Networking

- Frequency: 169.400 -169.475 MHz
- Channels: 9 [8 channels 12,5 kHz bandwidth 2,4 kbps FSK or 4,8 kbps GMSK; 1 channel 50 kHz bandwidth, 19.2 kbps. 4 GFSK]
- Modulation: GFSK, GMSK, 4GFSK
- Hayes Mode
- Encryption AES and NRZ
- Download Over-the-Air

### Optional Features

- ME70-169 module is available with DIP adapter and SMA connector

### Data

- Serial Data Rate: Up to 115.2 Kbps
- Radio Data Rate: 2.4, 4.8 and 19.2 kbps

### Environmental

- LGA mount technology, 30 pads, RF pads for antenna
- Rectangular 26 x 15 mm, height 3 mm
- Weight 1.7 g
- Temperature: -40°C to +85°C

### Interfaces

- Serial Interface: RS232 TTL (Tx, Rx, Cts, RTS)

### Approvals

- CE certified module
- Wireless M-Bus: EN13757-part4 2013 supported N mode

### Electrical & Sensitivity

- Output Power:
  - 12 dBm to 30 dBm ( 3dB step) @ 3.6V
- Power Supply: 2.3 to 3.6 V
- Board Consumption:
  - Tx: 485 mA (27dBm)
  - 730 mA (30 dBm)
  - Rx: 34 mA
  - Stand-by: < 2 µA (32.768 kHz on)
  - Sleep: 1.5 µA (wake on interruption)
- Sensitivity (PER<80%): -119 dBm @ 2.4 kbps



### Join the Telit Technical Forum

For a quicker and more rewarding integration experience join the Telit Technical Forum. There you can browse the first open forum covering all m2m topics, get direct support by region (EMEA, North America, Latin America, APAC), take part in this quickly growing m2m community and exchange experiences.