

SUMMARY

Wires

Low	10
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	C
Termination type	Male crimp
IP rating	50
Cable Ø	5.30 - 7.20 mm
Matching parts	CLB.M10.GYMG
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	CA*: Straight plug with cable collet and nut for fitting a bend relief
Keying	2 keys (gamma=60; Plug: male contacts; Receptacle: female contacts)
Housing Material	PSU (Polysulfone), gray
Cable Fixing	∅ 5.3 - 7.2 mm
Variant	

Performance

Configuration	
Insulator	
Rated Current	8 Amps

Specifications

Test voltage (kV rms) Contact-contact:	1.45
Air clearance min. (mm) or Creepage distance min. (mm):	0.75


Others

F ret (min):	150 N
--------------	-------

F ret (max): 250 N
Steam sterilization: 20 times (with potting on rear connection)
IP Rating: 50

DRAWINGS

Draws

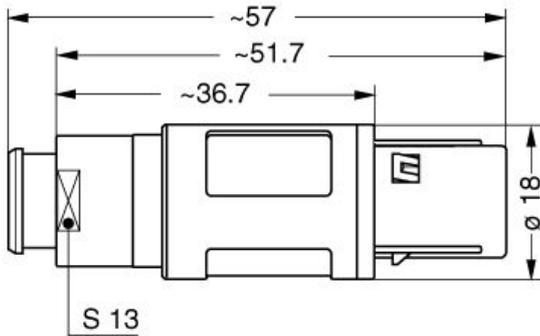

Dimensions

	A	L
mm.	18	57
in.	0,71	2,24

RECOMMENDED BY LEMO

Tools

Crimp Tool: DPC.91.701.V
Crimp settings: AWG/Selector = 20-22-24/6-5-5
Positionner: DCE.91.092.BVC
Extractor: DCF.91.090.2LT
Replacement contact: FGG.2B.560.ZZC

Cables