




CT130/CS130

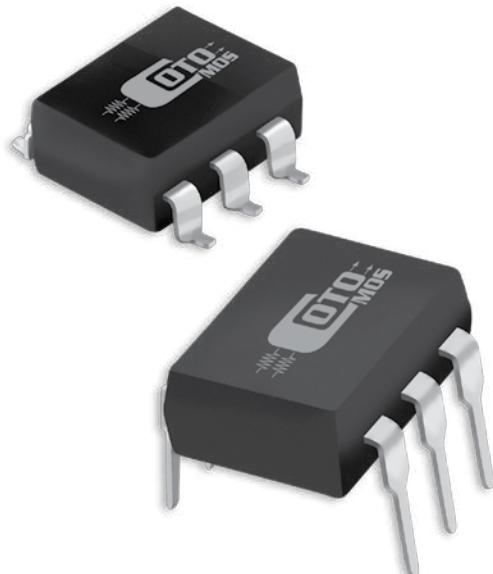

CotoMOS® CT130/CS130

The CT130 and CS130 feature current switching capability to 120mA with a low on resistance of 30Ω Maximum. Designed for Security, Measurement and Instrumentation applications the CotoMOS® relay is capable of handling 400V load conditions. If your requirements are different please contact your Coto Applications Engineer for assistance through www.cotorelay.com.


CT130/CS130 Features

- Contact Form: 1A
- Load Voltage: 400V Maximum
- Operation LED Current: 3.0mA Maximum
- Load Current: 120mA Maximum
- On-Resistance: 30Ω Maximum
- Low Off-State Leakage Current: 1.0µA Maximum
- I/O Breakdown Voltage: 1500Vrms Minimum
- Suffix - H for I/O Breakdown Voltage: 5000Vrms Minimum


DIMENSIONS

in Inches (Millimeters)


CT130

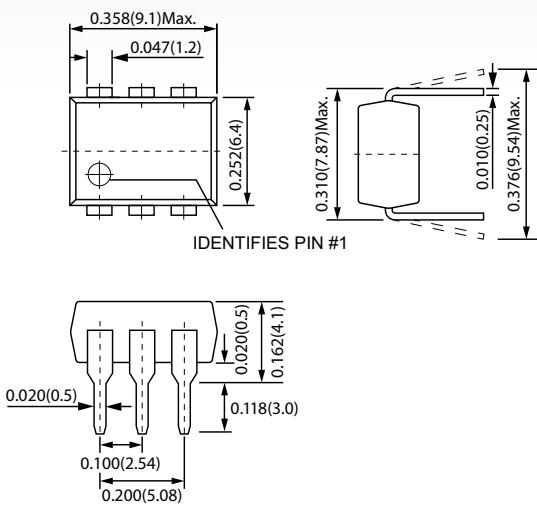

CS130

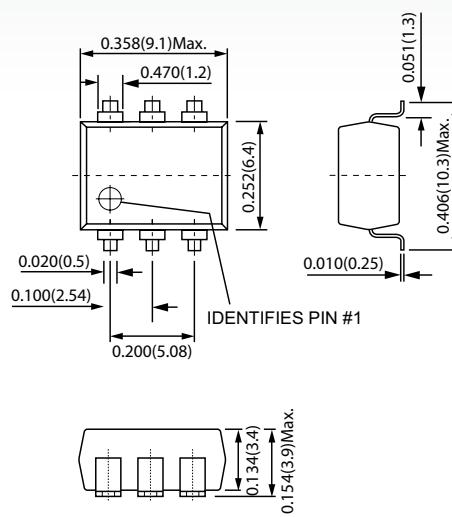

TERMINAL IDENTIFICATION



| | |
|---|---|
| 1: Anode (LED) 2: Cathode (LED) 3: NC | 4,6: Drain (MOS FET) 5: Source (MOS FET) |
|---|---|

CT130/CS130 MAXIMUM RATINGS (Ambient Temperature: 25°C)

| Parameters | Symbol | Units | Value |
|------------------------------|-------------------|-------------------|------------|
| INPUT SPECIFICATIONS | | | |
| Continuous LED Current | I _F | mA | 50 |
| Peak LED Current | I _{FP} | mA | 500 |
| LED Reverse Voltage | V _R | V | 5 |
| Input Power Dissipation | P _{in} | mW | 75 |
| OUTPUT SPECIFICATIONS | | | |
| Load Voltage | V _L | V (AC peak or DC) | 400 |
| Load Current | I _L | mA | 120 |
| Peak Load Current | I _{Peak} | A | 0.6 |
| Output Power Dissipation | P _{out} | mW | 450 |
| RELAY SPECIFICATIONS | | | |
| Total Power Dissipation | P _T | mW | 500 |
| I/O Breakdown Voltage | V _{I/O} | V _{rms} | 1500 |
| Operating Temperature | T _{Op} | °C | -40 ~ +85 |
| Storage Temperature | T _{Stg} | °C | -40 ~ +100 |

CT130/CS130 ELECTRICAL SPECIFICATIONS (Ambient Temperature: 25°C)

| Parameters | Symbol | Test Conditions | Units | Min | Typ | Max |
|------------------------------|--------------------|--|-------|-----------------|-----|-----|
| INPUT | | | | | | |
| LED Forward Voltage | V _F | I=10mA | V | 1.0 | | 1.5 |
| Operation LED Current | I _{F On} | | mA | | 0.9 | 3.0 |
| Recovery LED Voltage | V _{F Off} | | V | 0.5 | 1.0 | |
| OUTPUT | | | | | | |
| On-Resistance Drain to Drain | R _{on} | I _F =5mA, I _L =Rating Time to flow is within 1 sec. | Ω | 24 | 30 | |
| Off-State Leakage Current | I _{Leak} | V _L =400V | μA | | | 1.0 |
| Output Capacitance | C _{out} | V _L =0V, f=1MHz | pF | 115 | | |
| TRANSMISSION | | | | | | |
| Turn-On Time | T _{On} | I _F =10mA, I _L =Rating | ms | 0.2 | 1.0 | |
| Turn-Off Time | T _{Off} | | ms | 0.05 | 1.0 | |
| COUPLED | | | | | | |
| I/O Insulation Resistance | R _{I/O} | | Ω | 10 ⁹ | | |
| I/O Capacitance | C _{I/O} | f=1MHz | pF | 1.3 | | |

Environmental Ratings:

Operating Temp: -40°C to +85°C; Storage Temp: -40 to +100 C.
All electrical parameters measured at 25°C unless otherwise specified.