





89BSD

Digital Output

SPECIFICATIONS

- Stainless Steel with O-Ring Seal
- Pressure/Temperature Read-Out
- Digital Output (24-bit DS ADC)
- ASIC Calibrated
- Absolute, Sealed Gage
- 9mm Diameter

The 89BSD is a 9mm diameter small profile, media compatible, piezoresistive silicon pressure sensor packaged in a 316L stainless steel housing. This low power 24-bit DS ADC digital output pressure sensor supports an I²C interface protocol and is designed for threaded o-ring mounting. A custom ASIC is used for temperature compensation and offset correction. The sensing package utilizes silicone oil to transfer pressure from the 316L stainless steel diaphragm to the sensing element. A flex cable allows the 89BSD to connect to a smaller connection terminal where size is of primary concern.

The 89BSD is designed for high performance, low pressure applications.

For a similar sensor with a plastic threaded fitting, refer to the LM pressure transducer

FEATURES

Threaded/Weldable

I²C Interface

Low Power: <1μA

Standby Power: <0.15µASupply Voltage: 1.8 to 3.6Vdc

APPLICATIONS

Level Controls

• Tank Level Measurement

Corrosive Fluids and Gas Measurement Systems

Sealed Systems

Manifold Pressure Measurement

Barometric Pressure Measurement

• Dive Computers

STANDARD RANGES

Range	BarA	BarS
0 to 006	•	•
0 to 012	•	•
0 to 018	•	•
0 to 028	•	•
0 to 030	•	•

Intermediate pressure ranges available, contact factory

PERFORMANCE SPECIFICATIONS

Supply Voltage: 3Vdc

Ambient Temperature: 25°C (unless otherwise specified)

PARAMETERS	MIN	TYP	MAX	UNITS	NOTES	
ADC			24	bit		
Input Voltage Range	1.8		3.6	V	2	
Supply Current		See Table 1		mA		
Pressure Resolution		See Table 3		%Span	3	
Pressure Accuracy		±0.3		%Span		
Total Error Band		See Graph 1		%Span		
Conversion Time		See Table 2		ms	3	
Long Term Stability		±0.2		%Span/yr		
Compensated Temperature	-20		+85	°C		
Temperature Resolution		See Table 3		°C		
Temperature Accuracy	-2		+2	°C		
Operating Temperature	-40		+85	°C		
Storage Temperature	-40		+125	°C		
Pressure Overload			2X	Rated	4	
Pressure Burst			3X	Rated	5	
Interface Type		I ² C			6	
Media, Pressure Port	Liquids ar	Liquids and gases compatible with 316/316L Stainless Steel				

Notes

- 1. Coefficients must be read by microcontroller software and are to be used in a mathematical calculation for converting D1 and D2 into compensated pressure and temperature values. For calculation methods and coefficients, see application note APP-01006.
- 2. Output is not ratiometric to supply voltage.
- Oversampling ratio: 256 / 512 / 1024 / 2048 / 4096. See Table 2.
 2X or 400psi, whichever is less. The maximum pressure that can be applied without changing the transducer's performance or accuracy.
- 5. 3X or 600psi, whichever is less. The maximum pressure that can be applied to a transducer without rupture of either the sensing element or transducer.
- 6. Output protocol is I²C only. CSB is tied to GND, setting I²C address: 0x77 (1110111)

Table 1: Supply Current Characteristics

PARAMETERS	Symbol	Conditions		MIN	TYP	MAX	UNITS
		OSR	4096		12.5		
Supply Current (1 Sample per second)			2048		6.3		
	I_{DD}		1024		3.2		μΑ
			512		1.7		
			256		0.9		
Peak Supply Current		Dur Conve	0		1.4		mA
Standby Supply Current		@ 2	5°C		0.02	0.14	μA


Table 2: Analog Digital Converter (ADC)

aı	ble 2. Allalog Digital Colliverter (ADC)	,						
	PARAMETERS	Symbol	Cond	litions	MIN	TYP	MAX	UNITS
			OSR	4096	7.40	8.22	9.04	
				2048	3.72	4.13	4.54	
	Conversion Time	t_{C}		1024	1.88	2.08	2.28	ms
				512	0.95	1.06	1.17	
				256	0.48	0.54	0.60	

Table 3: Typical Resolution

OSR	Typical Pressure Resolution (%Span)	Typical Temperature Resolution (°C)
4096	0.0015	0.002
2048	0.0025	0.003
1024	0.003	0.005
512	0.005	0.008
256	0.008	0.012


Graph 1:

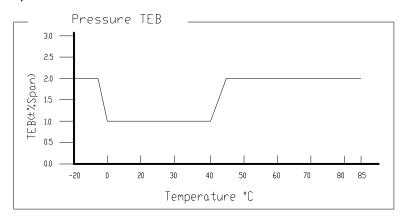

PERFORMANCE SPECIFICATIONS

(OR EQUVALENT) TO MATE WITH FPC CABLE

DIMENSIONS ARE IN INCHES [MM]

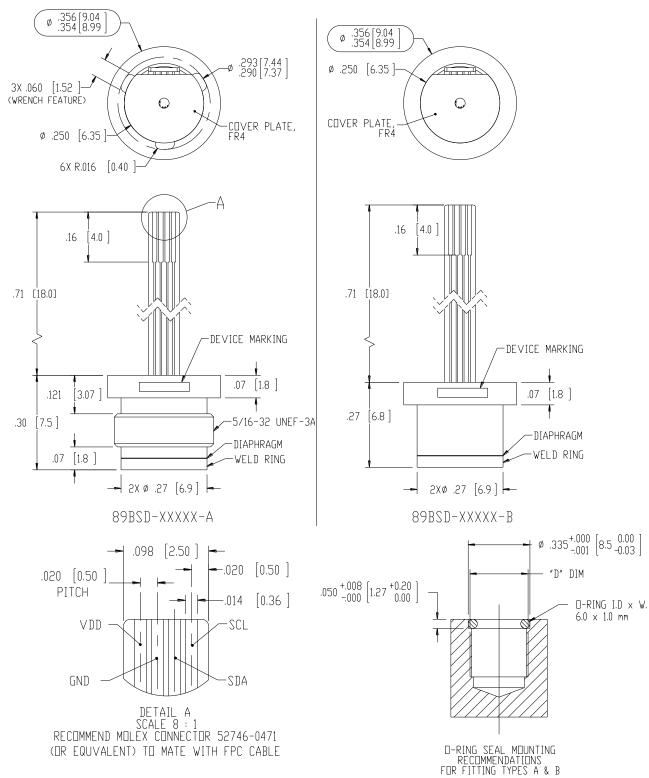



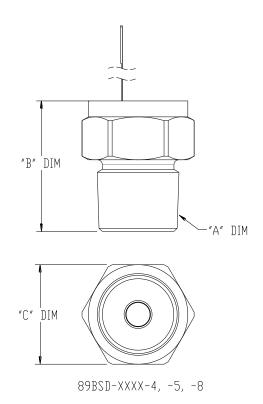


	TABLE 4						
FITTING TYPE	"A" DIM	"B" DIM	"C" DIM	"D" DIM			
4	1/4-18 NPT	.82 [20.8]	5/8 [15.9] HEX				
5	1/4-19 BSP	N/A					
8	1/8-27 NPT	.71 [18.0]	5/8 [15.9] HEX				
А	A NO FITTING, THREADED CAPSULE, 5/16-32 UNEF-3A 3B√.25						
В	B N□ FITTING, N□ THREAD CAPSULE Ø .28 √ .25						
NOTE : FITTING TYPE '-4' ASSEMBLY SHOWN FAR LEFT ALL DIMS ARE FOR REFERENCE ONLY							


BLOCK DIAGRAM

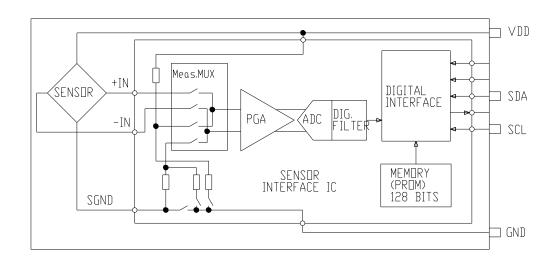

RECOMMENDED WRENCH DIMENSIONS

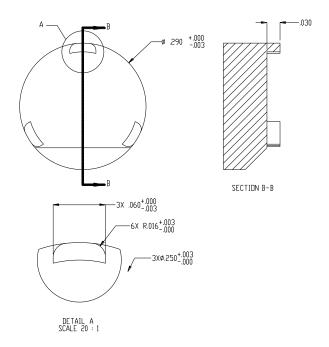

ORDERING INFORMATION

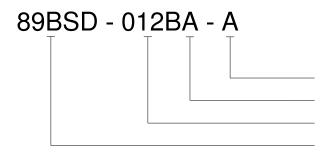

Fitting Type (See Table 4)

Type (A = Absolute, S = Sealed Gage)

Pressure Range

Model

NORTH AMERICA

Measurement Specialties, Inc., a TE Connectivity Company 45738 Northport Loop West Fremont, CA 94538 Tel: +1 800 767 1888 Fax: +1 510 498 1578

e-mail: pfg.cs.amer@meas-spec.com Website: www.meas-spec.com

EUROPE

Measurement Specialties (Europe), Ltd., a TE Connectivity Company 26 Rue des Dames 78340 Les Clayes-sous-Bois, France Tel: +33 (0) 130 79 33 00 Fax: +33 (0) 134 81 03 59

Sales: pfg.cs.emea@meas-spec.com

ASIA

Measurement Specialties (China), Ltd., a TE Connectivity Company No. 26 Langshan Road Shenzhen High-Tech Park (North) Nanshan District, Shenzhen, 518057 China

Tel: +86 755 3330 5088 Fax: +86 755 3330 5099

e-mail: pfg.cs.asia@meas-spec.com Website: www.meas-spec.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.