

### **Features**

- Single-Supply Operation (+2V to +6V)
- Rail-to-Rail Analog Signal Dynamic Range
- Low On-Resistance (7.2-ohm with 5V supply) Minimizes Distortion and Error Voltages
- On-Resistance Flatness, 3-ohm typ.
- Low Charge Injection Reduces Glitch Errors. Q = 1.6pC typ.
- High Speed.  $t_{ON} = 7$ ns typ.
- Wide –3dB Bandwidth: 326 MHz
- High-Current Channel Capability: >100mA
- TTL/CMOS Logic Compatible
- Low Power Consumption (5µW typ.)
- Packaging (Pb-free & Green Available)
  - 8-pin, 118 mil plastic MSOP (U)

## **Applications**

- · Audio, Video Switching and Routing
- Battery-Powered Communication Systems
- Computer Peripherals
- Telecommunications
- Portable Instrumentation
- Mechanical Relay Replacement
- Cell Phones
- PDAs

# **Dual, Wide Bandwidth Analog Switches**

## **Description**

The PI5A127 is a dual SPST (single-pole single-throw) analog switches designed for single supply operation. These high-precision devices are ideal for low-distortion audio, video, signal switching and routing.


The PI5A127 is a normally closed (NC) switch.

Each switch conducts current equally well in either direction when on. When off, they block voltages up to V+.

These switches are fully specified with +5V and +3.3V supplies. With +5V, they guarantee <10 -ohm ON-resistance. On-resistance matching between channels is within 2-ohm. On-resistance flatness is less than 5-ohm over the specified range. These switches also guarantee fast switching speeds ( $t_{\rm ON}$  < 20ns).

These products are available in 8-pin SOIC and MSOP plastic packages for operation over the industrial temperature range  $(-40^{\circ}\text{C to } +85^{\circ}\text{C})$ .

## **Functional Diagrams, Pin Configurations and Truth Tables**

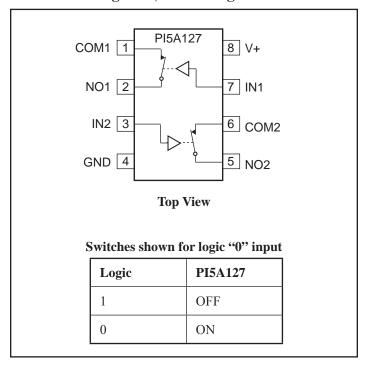

**09-0006** 1 PS8328F 11/18/09



## **Absolute Maximum Ratings**

Voltages Referenced to GND	
V <sub>+</sub>	0.5V to +7V
$V_{IN}$ , $V_{COM}$ , $V_{NC}$ , $V_{NO}$ (Note 1)	-0.5V to V+ +2V
	or 30mA, whichever occurs first
Current (any terminal except CC	OM,NO,NC)30mA
Current, COM, NO, NC	100mA
(Pulsed at 1ms, 10% duty cycle)	120mA

### **Thermal Information**

W
°C
°C
)

### Note 1:

Signals on NC, NO, COM, or IN exceeding V+ or GND are clamped by internal diodes. Limit forward diode current to 30mA.

**Caution**: Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied.

## **Electrical Specifications - Single +5V Supply** $(V+ = +5V \pm 10\%, GND = 0V, V_{INH} = 2.4V, V_{INL} = 0.8V)$

Parameter	Symbol	Conditions	Temp. (°C)	<b>Min.</b> <sup>(2)</sup>	<b>Typ.</b> (1)	Max.(2)	Units
Analog Switch	Analog Switch						
Analog Signal Range <sup>(3)</sup>	V <sub>ANALOG</sub>		Full	0		V+	V
On Bosistanos	D		25		7.2	10	
On Resistance	R <sub>ON</sub>	$V+=4.5V, I_{COM}=-30mA,$	Full			12	
On-Resistance Match	DB	$V_{NO}$ or $V_{NC} = +2.5V$	25		0.20	2	W
Between Channels <sup>(4)</sup> DR <sub>ON</sub>	DR <sub>ON</sub>		Full			4	
On-Resistance Flatness <sup>(5)</sup> R <sub>FLAT(ON</sub>	R	$V+=5V,$ $I_{COM}=-30\text{mA},$	25		2.72	3.5	
	FLAT(ON)	$V_{NO}^{COM}$ or $V_{NC} = 1V, 2.5V, 4V$	Full			4	
NO or NC Off Leakage	I <sub>NO(OFF) or</sub>	$V + = 5.5V, V_{COM} = 0V,$ $V_{NO}$ or $V_{NC} = 4.5V$	25		0.18		
Current <sup>(6)</sup>	I <sub>NC(OFF)</sub>		Full	-200		200	nA
COM Off Leakage	I <sub>COM(OFF)</sub>	V+ = 5.5V, $V_{COM} = + 4.5V, V_{NO}$	25		0.20		
Current <sup>(6)</sup>	COM(OFF)	or $V_{NC} = \pm 0V$	Full	-200		200	
COM On Leakage	COM On Leakage	$V+=5.5V$ , $V_{COM}=+4.5V$	25		0.20		
Current <sup>(6)</sup> $I_{\text{COM(ON)}}$	$V + = 5.5V$ , $V_{COM} = +4.5V$ $V_{NO}$ or $V_{NC} = +4.5V$	Full	-200		200		

### **Notes:**

- 1. The algebraic convention, where the most negative value is a minimum and the most positive is a maximum, is used in this data sheet.
- 2. Typical values are for DESIGN AID ONLY, not guaranteed or subject to production testing.
- 3. Guaranteed by design
- 4.  $\Delta R_{ON} = R_{ON} \max R_{ON} \min$ .
- 5. Flatness is defined as the difference between the maximum and minimum value of ON-resistance measured.
- 6. Leakage parameters are 100% tested at maximum rated hot temperature and guaranteed by correlation at +25°C.

09-0006 2 PS8328F 11/18/09



# $\textbf{Electrical Specifications - Single +5V Supply} \; (V + = + \; 5V \; \pm 10\%, \; GND = 0V, \; V_{INH} = 2.4V, \; V_{INL} = 0.8V)$

Parameter	Symbol	Conditions	Temp(°C)	<b>Min.</b> <sup>(1)</sup>	<b>Typ.</b> <sup>(2)</sup>	<b>Max.</b> <sup>(1)</sup>	Units
Logic Input							
Input High Voltage	V <sub>IH</sub>	Guaranteed logic High Level		2			
Input Low Voltage	V <sub>IL</sub>	Guaranteed logic Low Level				0.8	
Input Current with Voltage High	I <sub>INH</sub>	$V_{IN} = 2.4V$ , all others = 0.8V Full $V_{IN} = 0.8V$ , all others = 2.4V	Full	-1	0.005	1	V
Input Current with Voltage Low	I <sub>INL</sub>		-1	0.005	1		
Dynamic							
Turn-On Time	_		25		7	15	
ON	ON		Full			20	
	$V_{CC} = 5V$ , Figure 1	25		1	7	ns	
rum-on rime	t <sub>OFF</sub>		Full			10	
Charge Injection <sup>(3)</sup>	Q	$C_L = 1$ nF, Vgen = 0V, Rgen = 0 $\Omega$ , Figure 2			1.6	10	pC
Off Isolation	OIRR	$R_L = 50\Omega$ , $C_L = 5pF$ , f = 10MHz, Figure 3			-43		1D
Crosstalk	Xtalk	$R_L = 50\Omega, C_L = 5pF,$ f = 10  MHz,  Figure 4			-43		- dB
NC or NO Capacitance	C(off)	6 11 H E' 5	25		5.5		
COM Off Capacitance	Ccom(off)	f = 1kHz, Figure 5			5.5		pF
COM On Capacitance	Ccom(on)	f = 1kHz, Figure 6			13		
-3dB Bandwidth	BW	$R_L = 50\Omega$ , Figure 7	Full		326		MHz
Distortion	D	R <sub>L</sub> = 10			0.2		%

continued



Parameter	Symbol	Conditions	Temp(°C)	<b>Min.</b> <sup>(1)</sup>	<b>Typ.</b> <sup>(2)</sup>	Max.(1)	Units
Supply							
Power-Supply Range	V+			2		6	V
Positve Supply Current	I+	$V+=5.5V$ , $V_{IN}=0V$ or $V_{CC}$ , $V+$ All Channels on or off	Full			1	μА

### **Notes:**

- 1. The algebraic convention, where the most negative value is a minimum and the most positive is a maximum, is used in this data sheet.
- 2. Typical values are for DESIGN AID ONLY, not guaranteed or subject to production testing.
- 3. Guaranteed by design.



# $\textbf{Electrical Specifications - Single +3.3V Supply} \ (V = +3.3V \pm 10\%, \ GND = 0V, \ V_{INH} = 2.4V, \ V_{INL} = 0.8V)$

Parameter	Symbol	Conditions	Temp.(°C)	<b>Min.</b> <sup>(1)</sup>	<b>Typ.</b> <sup>(2)</sup>	<b>Max.</b> <sup>(1)</sup>	Units
Analog Switch	Analog Switch						
Analog Signal Range <sup>(3)</sup>	V <sub>ANALOG</sub>			0		V+	V
On-Resistance R <sub>ov</sub>	R <sub>on</sub>	$V+ = 3V, I_{COM} = -30mA,$ $V_{NO} \text{ or } V_{NC} = 1.5V$	25		12	18	
	ON	$V_{NO}$ or $V_{NC} = 1.5 V$	Full			22	
On-Resistance Match			25		1	1	
Between Channels <sup>(4)</sup> $\Delta R_{ON}$	$V+=3.3V$ , $I_{COM}=-30mA$ ,	Full			2	Ω	
On-Resistance Flat- nesS <sup>(3,5)</sup>	D	$V_{NO}$ or $V_{NC} = 0.8V$ , 2.5V	25		3.5	4	_
	K <sub>FLAT(ON)</sub>		Full			5	
Dynamic	Dynamic						
Turn-On Time	+		25		14	25	
Turn-On Time $t_{ON}$ Turn-Off Time $t_{OFF}$	$V+=3.3V, V_{NO}$	Full			40	nc	
	4	or $V_{NC} = 1.5V$ , Figure 1	25		4.5	12	ns
	OFF		Full			20	
Charge Injection <sup>(3)</sup>	Q	$C_L = 1$ nF, $V_{GEN} = 0$ V, $R_{GEN} = 0$ V, Figure 2	25		1.3	10	pC
Supply							
Supply Current	I+	$V+=3.6V$ , $V_{IN}=0V$ or $V+$ All Channels on or off	Full			1	μА

### **Notes:**

- 1. The algebraic convention, where the most negative value is a minimum and the most positive is a maximum, is used in this data sheet.
- 2. Typical values are for DESIGN AID ONLY, not guaranteed or subject to production testing.
- 3. Guaranteed by design
- 4. ΔR<sub>ON</sub>=R<sub>ON</sub> max R<sub>ON</sub> min.
   5. Flatness is defined as the difference between the maximum and minimum value of ON-resistance measured.

5 PS8328F 11/18/09 09-0006



## **Test Circuits/Timing Diagrams**

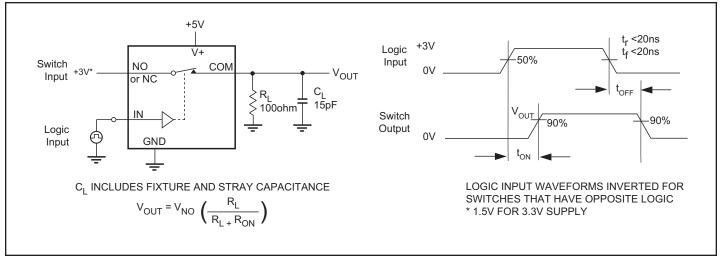


Figure 1. Switching Time

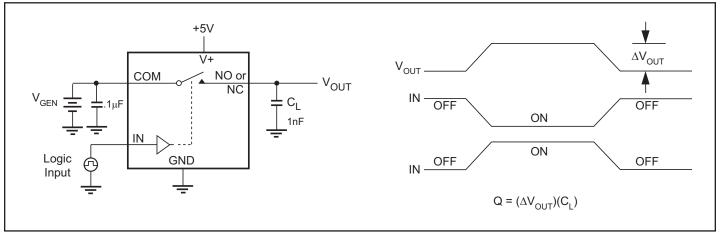


Figure 2. Charge Injection

09-0006 PS8328F 11/18/09



## **Test Circuits/Timing Diagrams (continued)**

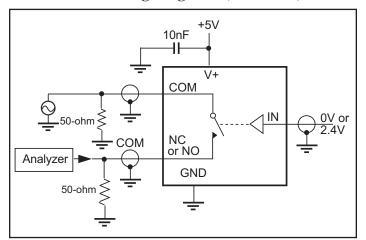


Figure 3. Off Isolation

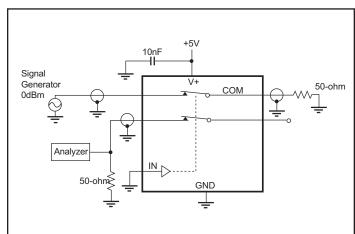


Figure 4. Crosstalk

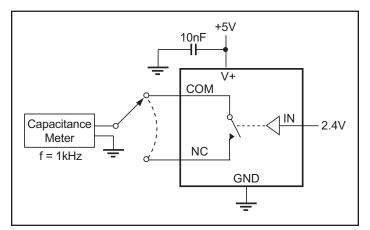


Figure 5. Channel-Off Capacitance

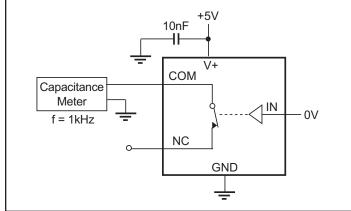


Figure 6. Channel-On Capacitance


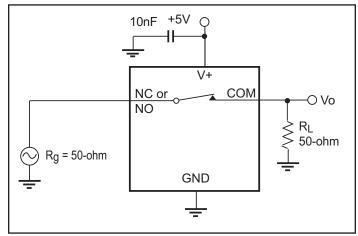


Figure 7. Bandwidth



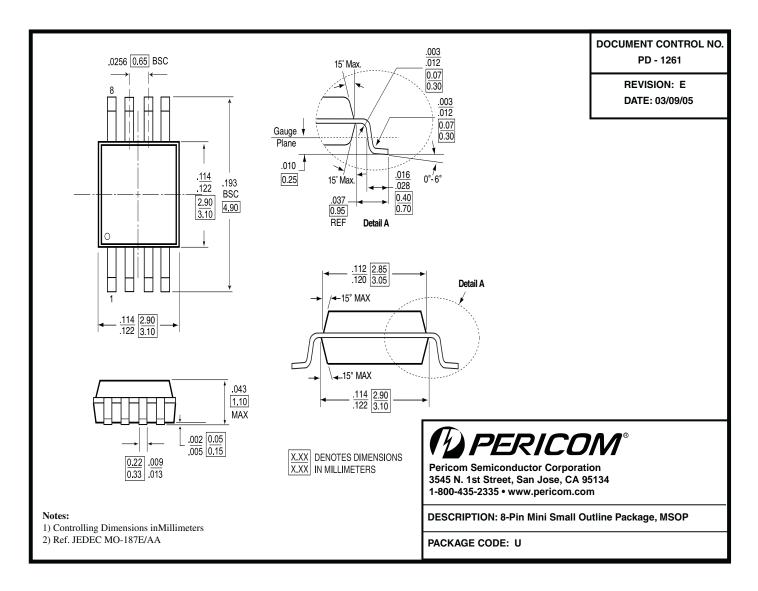

#### Note:

• For latest package info, please check: http://www.pericom.com/products/packaging/mechanicals.php

## **Ordering Information**

Ordering Code	Package Code	Package Description
PI5A127UX	U	8-pin MSOP
PI5A127UEX	U	Pb-free & Green, 8-pin MSOP (Tape/Reel)

### **Notes:**

- Thermal characteristics can be found on the company web site at www.pericom.com/packaging/
- E = Pb-free and Green
- Adding an X Suffix = Tape/Reel

Pericom Semiconductor Corporation • 1-800-435-2336 • www.pericom.com