## TONER TRANSFER PAPER

## MASTER REFERENCE OF ALL "PULSAR" PRODUCTS:

PCB "Fab-In-A-Box" <u>182-1027-ND</u>

- TTS Transfer Paper <u>182-1003-ND</u> (Shown Here)

- GreenTRF film
- WhiteTRF film
- PCB (Single Sided)
- PCB (Double Sided)
- PCB (Double Sided)

**DecalPRO**<sup>®</sup> <u>182-1026-ND</u>


"Combo" (both kits) <u>182-1028-ND</u>

GBC® Laminator ("TIA") <u>182-1029-ND</u>

Toner Transfer Paper, or TTS for short is the basis by which to capture the "graphic" out of the laser printer (or photo-copier) to be able to transfer the image for making printed circuit boards or dry transfer graphics.

The paper is coated with a thin layer of Dextrin which is a water-soluble glue that acts as a barrier between the printed image and the fibers of the paper. Because there is an invisible barrier it means we have a way to release the image by merely wetting the paper. However, if the image is not secured to something first, the image will slide off the paper and break up in to a million little pieces (or particles) of toner.

The technique is very simple. All you need is a laser printer or photo-copier, a house-hold iron and and a couple of inexpensive supply items and you can crank out quality PCB's with traces as fine as .006" on boards up to 8" x 10" in just minutes. For single and double-sided boards

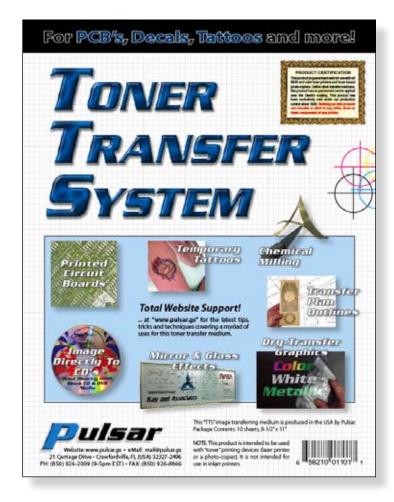

## **Package Contents:**

- 10 sheets, 8-1/2" x 11"
- Coated 1-side.

Safe for ALL laser printers and photo-copiers!

