

# GLAND PLATES


BUL10293

REV. A

## ASSEMBLY INSTRUCTIONS FOR GLAND PLATE ACCESSORIES (GP063, GP134, GP136, & GP216)



### INSTRUCTIONS :

- A) LOCATE GLAND PLATE IN DESIRED LOCATION.
- B) USE GLAND PLATE AS TEMPLATE FOR MARKING HOLE AND CUTOUT LOCATION. MARK AROUND OUTSIDE OF GLAND PLATE, THEN OFFSET 5/8" (16mm) AND REMARK. (USE CHART TO CONFIRM CUTOUT SIZE)
- C) DRILL (1/4" / 6mm) HOLES AND CUT GLAND PLATE OPENING.
- D) INSTALL GASKET ONTO BODY OF ENCLOSURE.
- E) USE SUPPLIED 10-32 HARDWARE TO INSTALL GLAND PLATE. (AS SHOWN)

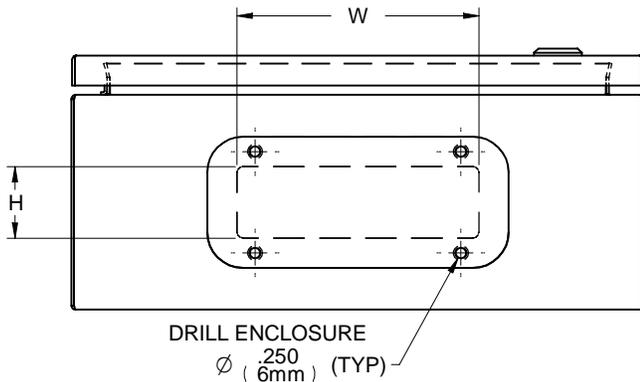

PART SHOWN -	PART NUMBER	CUTOUT SIZE		NUMBER OF SCREWS
		H	W	
	GP063	1.50	5.06	4
	GP134	2.31	11.75	6
	GP136	4.63	12.13	6
	GP216	4.63	19.63	12

ITEM #	DESCRIPTION
1	ENCLOSURE - BODY
2	GLAND PLATE GASKET
3	GLAND PLATE
4	WASHER M10 NEO SEAL SS
5	SCREW 10-32 X 5/8 PH PAN SS
6	NUT 10-32 KEP ZP

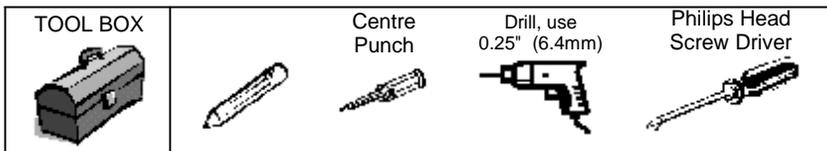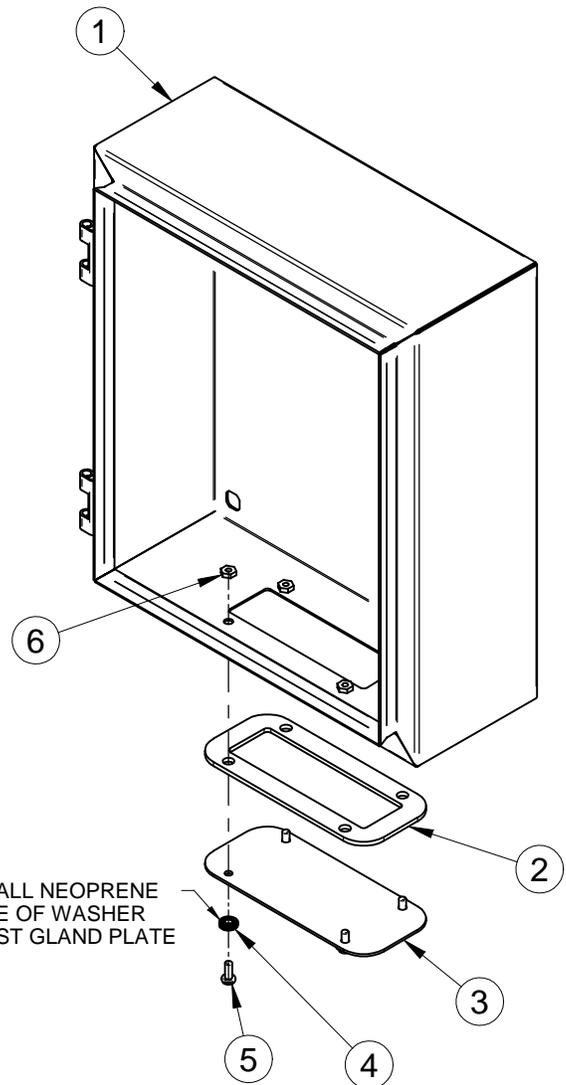

**HAMMOND**  
**MANUFACTURING™**  
**ENCLOSURES**