

CHEMINAX

75 OHM, AWG 28, 19 STRANDS OF AWG 42 CONDUCTOR,
COAXIAL CABLE


Date: 2-2-05
Revision: B

THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.

CONSTRUCTION DETAILS

ELECTRICAL CHARACTERISTICS

DIMENSIONS ARE NOMINAL VALUES IN INCHES UNLESS OTHERWISE DESIGNATED.

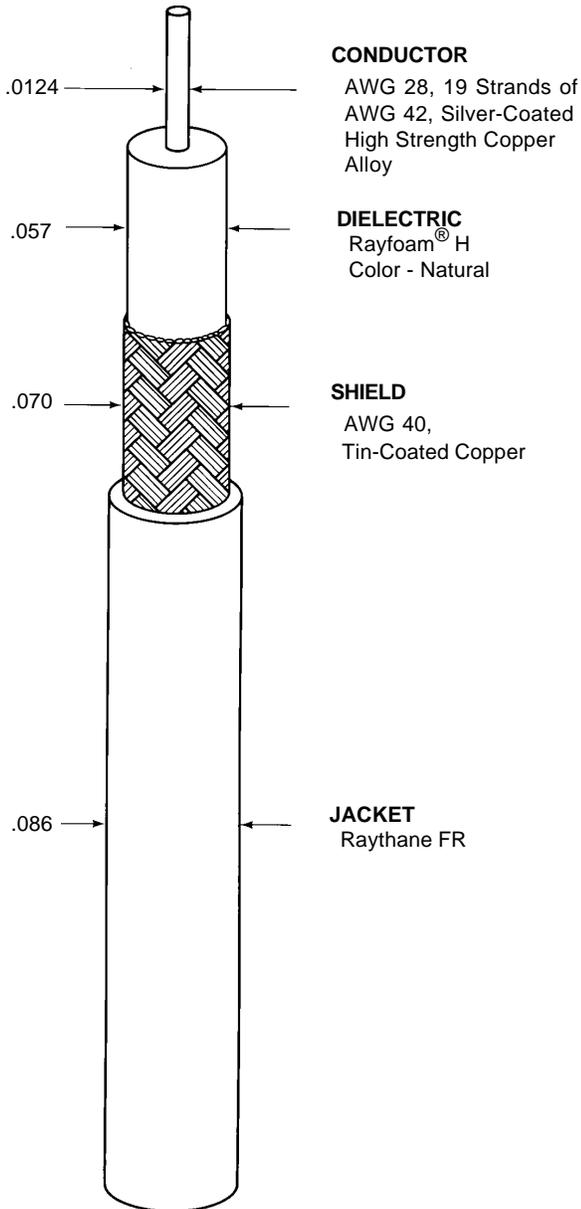

| | |
|--------------------------|-----------------------|
| CHARACTERISTIC IMPEDANCE | 75 ± 3 ohms, Method B |
| CAPACITANCE | 17.8 pF/ft. (nominal) |
| VELOCITY OF PROPAGATION | 76% (nominal) |

ADDITIONAL REQUIREMENTS

ELECTRICAL

| | |
|--------------------------------|---------------------------------------|
| CONDUCTOR RESISTANCE | 112.4 ohms/1000 ft. (nominal) |
| INSULATION RESISTANCE | 10,000 megohms (minimum) for 1000 ft. |
| JACKET FLAWS | |
| SPARK TEST | 1.0 kV (rms) |
| IMPULSE TEST | 6.0 kV (peak) |
| VOLTAGE WITHSTAND (DIELECTRIC) | 750 volts (rms) (minimum) |

ENVIRONMENTAL

| | |
|--|----------------------------|
| FLAMMABILITY | Method C |
| HEAT SHOCK | 150°C |
| LOW TEMPERATURE- COLD BEND | -55°C/2.50 inch mandrel |
| VOLTAGE WITHSTAND (POST ENVIRONMENTAL) | 1000 volts (rms), 1 minute |

PHYSICAL

| | |
|-------------------------|------------------------------------|
| INSULATION (DIELECTRIC) | |
| ELONGATION | 50% (minimum) |
| TENSILE STRENGTH | 600 lbf/in ² (minimum) |
| JACKET | |
| ELONGATION | 300% (minimum) |
| TENSILE STRENGTH | 2500 lbf/in ² (minimum) |
| JACKET THICKNESS | .008 inch (nominal) |
| SHIELD COVERAGE | 90% (minimum) |

| | |
|--------|----------------------------|
| WEIGHT | 5.8 lbs/1000 ft. (nominal) |
|--------|----------------------------|

Outer jacket color will be black (designated by a "0" appended to the part number, e.g., 7528L1024-0) unless otherwise specified.

Designate outer jacket color with a dash number in accordance with MIL-STD-681. Other codes and suffixes may be added to the part number, as necessary, to capture any additional requirements imposed by the purchase order.

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

tyco
Electronics

Raychem
Wire & Cable

501 Oakside Avenue
Redwood City, California 94063-3800
1-800-227-8816 Fax: 1-650-361-6297

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.